


**Series 240 • 250  
Pneumatic and Electric Control Valves**



**Information Sheet Part 3**

**Valve flow coefficients**

**Type 3241 • Type 3249 • Type 3251 • Type 3254 • Type 3256**

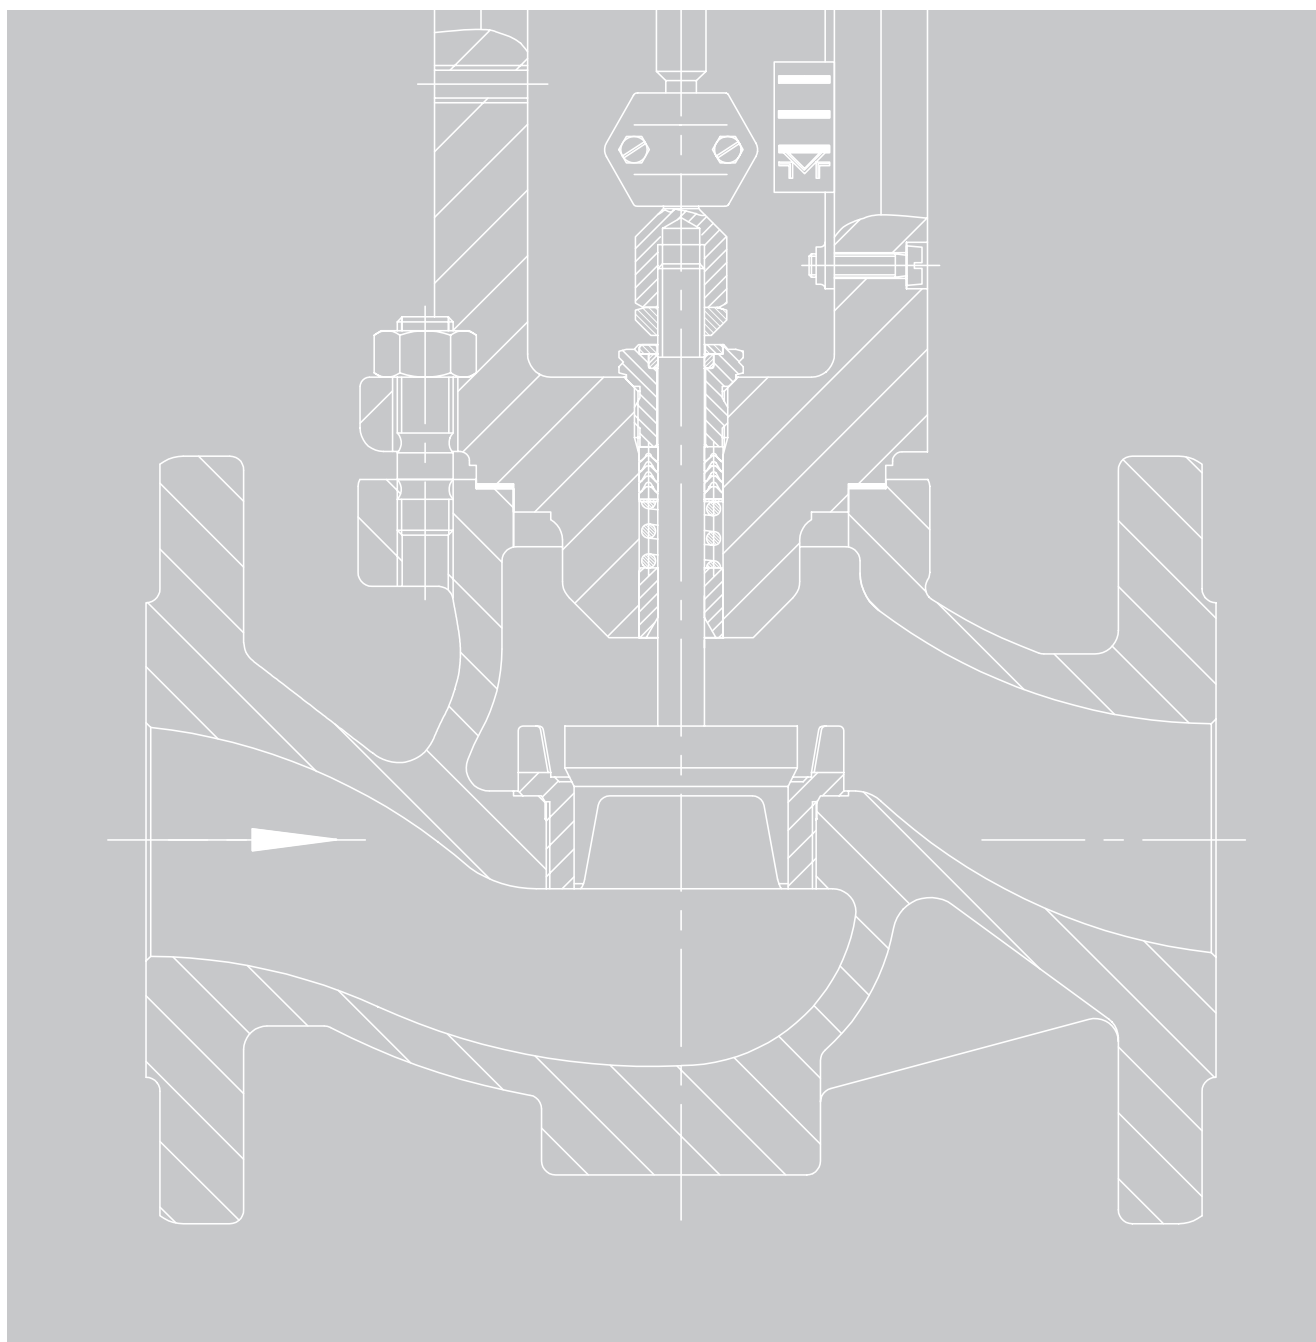

## Valve characteristics

This Information Sheet contains valve flow coefficients (according to IEC 60534-2-3) measured on the SAMSON test bench for all available nominal sizes and flow coefficients  $K_{VS}$  for the Type 3241, Type 3251, and Type 3254 Globe Valves as well as for the Type 3256 Angle Valve.

The flow coefficients  $K_V$  are specified for a travel of up to 110 % to indicate the remaining reserve that the valves have.

**NOTICE!** This overtravel cannot be implemented in valves with bellows seal.

**Note:** In the online version of this data sheet, you can click on the  $K_{VS}$  or  $C_V$  coefficient to open a graph of the flow coefficient.

### You can find more details on the valves in the following data sheets:

|                             |                  |
|-----------------------------|------------------|
| Type 3241 Globe Valve ..... | DIN ▶ T 8015 EN  |
| .....                       | ANSI ▶ T 8012 EN |
| Type 3251 Globe Valve ..... | DIN ▶ T 8051 EN  |
| .....                       | ANSI ▶ T 8052 EN |
| Type 3254 Globe Valve ..... | DIN ▶ T 8060 EN  |
| .....                       | ANSI ▶ T 8061 EN |
| Type 3256 Angle Valve ..... | DIN ▶ T 8065 EN  |
| .....                       | ANSI ▶ T 8066 EN |

## Contents

|                             |         |
|-----------------------------|---------|
| Type 3241 Globe Valve ..... | Page 3  |
| Type 3249 Angle Valve ..... | Page 45 |
| Type 3251 Globe Valve ..... | Page 51 |
| Type 3254 Globe Valve ..... | pending |
| Type 3256 Angle Valve ..... | pending |

## Abbreviations

|    |                          |
|----|--------------------------|
| NR | Noise-reducing parts     |
| CH | Characteristics          |
| St | Flow divider ▶ T 8081 EN |

## Type 3241 Globe Valve

### $K_v$ coefficients ( $m^3/h$ ) for Type 3241 Globe Valve

#### Standard plug

without flow divider

with equal percentage characteristic .. Table 3241.1

with linear characteristic ..... Table 3241.2

with flow divider St I

with equal percentage characteristic .. Table 3241.3

with linear characteristic ..... Table 3241.4

with flow divider St II

with equal percentage characteristic .. Table 3241.5

with linear characteristic ..... Table 3241.6

with flow divider St III

with equal percentage characteristic .. Table 3241.7

with linear characteristic ..... Table 3241.8

#### AC-Trim

AC-1 with equal percentage characteristic Table 3241.9

AC-2 with equal percentage characteristic Table 3241.10

#### Perforated plug

without flow divider

with equal percentage characteristic .. Table 3241.11

with linear characteristic ..... Table 3241.12

with flow divider St I

with equal percentage characteristic .. Table 3241.13

with linear characteristic ..... Table 3241.14

with flow divider St II

with equal percentage characteristic .. Table 3241.15

with linear characteristic ..... Table 3241.16

with flow divider St III

with equal percentage characteristic .. Table 3241.17

with linear characteristic ..... Table 3241.18

#### Without trim

with cast body ..... Table 3241.19

with forged body ..... Table 3241.20

### $C_v$ coefficients (gpm) for Type 3241 Globe Valve

#### Standard plug

without flow divider

with equal percentage characteristic .. Table 3241.21

with linear characteristic ..... Table 3241.22

with flow divider St I

with equal percentage characteristic .. Table 3241.23

with linear characteristic ..... Table 3241.24

with flow divider St II

with equal percentage characteristic .. Table 3241.25

with linear characteristic ..... Table 3241.26

with flow divider St III

with equal percentage characteristic .. Table 3241.27

with linear characteristic ..... Table 3241.28

#### AC-Trim

AC-1 with equal percentage characteristic Table 3241.29

AC-2 with equal percentage characteristic Table 3241.30

#### Perforated plug

without flow divider

with equal percentage characteristic .. Table 3241.31

with linear characteristic ..... Table 3241.32

with flow divider St I

with equal percentage characteristic .. Table 3241.33

with linear characteristic ..... Table 3241.34

with flow divider St II

with equal percentage characteristic .. Table 3241.35

with linear characteristic ..... Table 3241.36

with flow divider St III

with equal percentage characteristic .. Table 3241.37

with linear characteristic ..... Table 3241.38

#### Without trim

with cast body ..... Table 3241.39

with forged body ..... Table 3241.40

**Table 3241.1:  $K_v$  coefficients (m<sup>3</sup>/h) for Type 3241 Globe Valve: Standard plug without flow divider, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel**

| $K_{vs}$ | $C_v$ | DN                     | NPS            | NR      | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $K_v$ coefficient) |        |        |        |        |        |        |        |        |        |        |        |       |
|----------|-------|------------------------|----------------|---------|------------------|----------------|----------------|---|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------|
|          |       |                        |                |         |                  |                |                | 0   | 5      | 10     | 20     | 30     | 40     | 50     | 60     | 70     | 80     | 90     | 100    | 110   |
| ▶ 0.1    | 0.12  | 15, 20, 25             | ½, ¾, 1        | Without | Equal percentage | 3              | 15             | 0.0017  | 0.0024 | 0.0030 | 0.0043 | 0.0060 | 0.0084 | 0.0130 | 0.0192 | 0.0269 | 0.0418 | 0.0643 | 0.0985 | 0.150 |
| ▶ 0.16   | 0.2   | 15, 20, 25             | ½, ¾, 1        |         |                  | 3              | 15             | 0.0019  | 0.0024 | 0.0032 | 0.0048 | 0.0071 | 0.0116 | 0.018  | 0.027  | 0.040  | 0.058  | 0.093  | 0.172  | 0.267 |
| ▶ 0.25   | 0.3   | 15, 20, 25             | ½, ¾, 1        |         |                  | 3              | 15             | 0.0038  | 0.0044 | 0.0054 | 0.0082 | 0.0136 | 0.0210 | 0.0318 | 0.0482 | 0.0766 | 0.119  | 0.185  | 0.274  | 0.315 |
| ▶ 0.4    | 0.5   | 15, 20, 25, 32, 40, 50 | ½, ¾, 1, 1½, 2 |         |                  | 6              | 15             | 0.008   | 0.009  | 0.011  | 0.019  | 0.029  | 0.044  | 0.064  | 0.093  | 0.131  | 0.191  | 0.284  | 0.436  | 0.753 |
| ▶ 0.63   | 0.75  | 15, 20, 25, 32, 40, 50 | ½, ¾, 1, 1½, 2 |         |                  | 6              | 15             | 0.013   | 0.019  | 0.024  | 0.036  | 0.053  | 0.072  | 0.103  | 0.143  | 0.213  | 0.315  | 0.461  | 0.676  | 1.0   |
| ▶ 1      | 1.2   | 15, 20, 25, 32, 40, 50 | ½, ¾, 1, 1½, 2 |         |                  | 6              | 15             | 0.019   | 0.025  | 0.031  | 0.044  | 0.066  | 0.097  | 0.149  | 0.226  | 0.338  | 0.495  | 0.738  | 1.10   | 1.27  |
| ▶ 1.6    | 2     | 15, 20, 25, 32, 40, 50 | ½, ¾, 1, 1½, 2 |         |                  | 12             | 15             | 0.0240  | 0.0328 | 0.0410 | 0.0627 | 0.096  | 0.147  | 0.221  | 0.339  | 0.515  | 0.779  | 1.16   | 1.71   | 2.59  |
| ▶ 2.5    | 3     | 15, 20, 25, 32, 40, 50 | ½, ¾, 1, 1½, 2 |         |                  | 12             | 15             | 0.034   | 0.046  | 0.060  | 0.098  | 0.153  | 0.239  | 0.364  | 0.554  | 0.841  | 1.24   | 1.81   | 2.77   | 3.72  |
| ▶ 4      | 5     | 15, 20, 25, 32, 40, 50 | ½, ¾, 1, 1½, 2 |         |                  | 12             | 15             | 0.082   | 0.096  | 0.118  | 0.177  | 0.267  | 0.382  | 0.564  | 0.872  | 1.39   | 2.37   | 3.53   | 4.19   | 4.5   |
| ▶ 6.3    | 7.5   | 20, 25, 32, 40, 50     | ¾, 1, 1½, 2    |         |                  | 24             | 15             | 0.14  | 0.17   | 0.21   | 0.30   | 0.42   | 0.63   | 0.95   | 1.35   | 2.00   | 2.94   | 4.34   | 6.65   | 9.1   |
| ▶ 10     | 12    | 20, 25, 32, 40, 50     | ¾, 1, 1½, 2    |         |                  | 24             | 15             | 0.13  | 0.23   | 0.29   | 0.47   | 0.70   | 1.02   | 1.46   | 2.10   | 3.05   | 4.7    | 8.1    | 10.5   | 12.3  |
| ▶ 16     | 20    | 32, 40, 50             | 1½, 2          |         |                  | 31             | 15             | 0.35  | 0.44   | 0.53   | 0.78   | 1.19   | 1.79   | 2.6    | 3.8    | 5.6    | 8.5    | 12.4   | 16.1   | 18.3  |
| ▶ 25     | 30    | 40, 50, 65, 80         | 1½, 2, 2½, 3   |         |                  | 38             | 15             | 0.52  | 0.65   | 0.80   | 1.14   | 1.72   | 2.6    | 4.1    | 6.8    | 10.4   | 14.9   | 19.5   | 23.8   | 26.7  |
| ▶ 40     | 47    | 50, 65, 80             | 2, 2½, 3       |         |                  | 48             | 15             | 0.75  | 0.81   | 0.99   | 2.0    | 4.3    | 8.1    | 13.3   | 19.4   | 25.3   | 30.7   | 35.1   | 39.2   | 42.6  |
| ▶ 60     | 70    | 65, 80                 | 2½, 3          |         |                  | 63             | 15             | 1.7   | 1.9    | 2.2    | 3.3    | 5.6    | 10.4   | 18.4   | 26.3   | 34.4   | 41.8   | 49.3   | 56.3   | 61.9  |
| ▶ 63     | 75    | 100, 150               | 4, 6           |         |                  | 63             | 30             | 1.6   | 2.0    | 2.5    | 3.5    | 5.1    | 7.2    | 10.4   | 14.8   | 22.3   | 34.5   | 49.4   | 62.5   | 73.0  |
| ▶ 80     | 95    | 80                     | 3              |         |                  | 80             | 15             | 2.4   | 3.0    | 3.7    | 5.4    | 7.9    | 11.9   | 19.5   | 28.4   | 38.6   | 50.0   | 61.7   | 74.0   | 85.7  |
| ▶ 100    | 120   | 80                     | 3              |         |                  | 80             | 19             | 2.4   | 3.2    | 4.2    | 6.7    | 11.1   | 20.1   | 31.8   | 45.5   | 60.2   | 75.5   | 90.3   | 103.9  |       |
| ▶ 100    | 120   | 100, 125, 150          | 4, 6           |         |                  | 80             | 30             | 1.05  | 1.44   | 2.0    | 3.4    | 5.6    | 8.4    | 13.6   | 22.9   | 39.9   | 59.9   | 80.5   | 99.2   | 115.9 |
| ▶ 160    | 190   | 100, 125, 150          | 4, 6           |         |                  | 100            | 30             | 3.8   | 4.6    | 5.4    | 7.7    | 11.1   | 17.5   | 31.2   | 51.2   | 75.8   | 100.0  | 125.3  | 148.1  | 164.9 |
| ▶ 200    | –     | 125                    | –              |         |                  | 110            | 30             | 4.1   | 5.6    | 6.7    | 9.6    | 12.6   | 17.1   | 26.9   | 44.3   | 77.2   | 115.9  | 155.7  | 191.9  | 217.1 |
| ▶ 250    | 290   | 200, 250, 300          | 8, 10, 12      |         |                  | 125            | 60             | 6.9   | 8.3    | 10.0   | 14.1   | 20.3   | 28.8   | 41.9   | 59.3   | 89.8   | 138.8  | 198.3  | 251.3  | 293.1 |
| ▶ 260    | 300   | 150                    | 6              |         |                  | 130            | 30             | 7.0   | 8.4    | 11.1   | 19.5   | 36.8   | 67.1   | 100.8  | 136.1  | 169.6  | 203.7  | 235.1  | 264.1  | 289.3 |
| ▶ 360    | 420   | 200, 250, 300          | 8, 10, 12      |         |                  | 150            | 60             | 8.2   | 10.4   | 13.2   | 19.6   | 28.6   | 41.4   | 57.9   | 91.9   | 154.5  | 232.1  | 311.5  | 390.1  | 448.8 |
| ▶ 630    | 735   | 200, 250, 300          | 8, 10, 12      | 200     | 60               | 14.5           | 18.1           | 22.3  | 34.6   | 58.2   | 113.1  | 200.1  | 298.0  | 408.9  | 483.5  | 545.1  | 580.4  | 608.5  |        |       |
| ▶ 1000   | 1150  | 250, 300               | 10, 12         | 250     | 120              | 13.9           | 19.5           | 27.5  | 46.2   | 76.4   | 118.3  | 177.8  | 260.4  | 399.9  | 612.2  | 843.9  | 1074.2 | 1184.6 |        |       |
| ▶ 1500   | 1730  | 300                    | 12             | 300     | 120              | 20.1           | 28.2           | 39.7  | 66.7   | 103.2  | 153.9  | 231.2  | 338.5  | 519.8  | 795.8  | 1097.0 | 1396.2 | 1502.5 |        |       |

**Table 3241.2:**  $K_v$  coefficients (m<sup>3</sup>/h) for Type 3241 Globe Valve: Standard plug without flow divider, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                     | NPS                | NR      | CH     | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $K_v$ coefficient) |        |       |       |       |       |       |        |        |        |        |       |       |
|----------|-------|------------------------|--------------------|---------|--------|----------------|----------------|---|--------|-------|-------|-------|-------|-------|--------|--------|--------|--------|-------|-------|
|          |       |                        |                    |         |        |                |                | 0   | 5      | 10    | 20    | 30    | 40    | 50    | 60     | 70     | 80     | 90     | 100   | 110   |
| ▶ 0.1    | 0.12  | 15, 20, 25             | ½, ¾, 1            | Without | Linear | 3              | 15             | 0.0014  | 0.0094 | 0.016 | 0.027 | 0.036 | 0.045 | 0.053 | 0.063  | 0.072  | 0.082  | 0.092  | 0.101 | 0.112 |
| ▶ 0.16   | 0.2   | 15, 20, 25             | ½, ¾, 1            |         |        | 3              | 15             | 0.0032  | 0.0112 | 0.019 | 0.033 | 0.048 | 0.064 | 0.080 | 0.097  | 0.113  | 0.129  | 0.145  | 0.161 | 0.178 |
| ▶ 0.25   | 0.3   | 15, 20, 25             | ½, ¾, 1            |         |        | 3              | 15             | 0.0049  | 0.025  | 0.039 | 0.064 | 0.088 | 0.111 | 0.135 | 0.159  | 0.182  | 0.206  | 0.230  | 0.254 | 0.277 |
| ▶ 0.4    | 0.5   | 15, 20, 25, 32, 40, 50 | 1/2, 3/4, 1, 1½, 2 |         |        | 6              | 15             | 0.0059  | 0.034  | 0.058 | 0.103 | 0.143 | 0.184 | 0.225 | 0.266  | 0.307  | 0.348  | 0.389  | 0.429 | 0.470 |
| ▶ 0.63   | 0.75  | 15, 20, 25, 32, 40, 50 | 1/2, 3/4, 1, 1½, 2 |         |        | 6              | 15             | 0.0066  | 0.039  | 0.071 | 0.139 | 0.206 | 0.272 | 0.339 | 0.405  | 0.472  | 0.538  | 0.605  | 0.672 | 0.738 |
| ▶ 1      | 1.2   | 15, 20, 25, 32, 40, 50 | 1/2, 3/4, 1, 1½, 2 |         |        | 6              | 15             | 0.009   | 0.070  | 0.121 | 0.219 | 0.321 | 0.423 | 0.525 | 0.627  | 0.729  | 0.831  | 0.933  | 1.035 | 1.138 |
| ▶ 1.6    | 2     | 15, 20, 25, 32, 40, 50 | 1/2, 3/4, 1, 1½, 2 |         |        | 12             | 15             | 0.025   | 0.105  | 0.187 | 0.352 | 0.523 | 0.693 | 0.864 | 1.035  | 1.205  | 1.38   | 1.55   | 1.72  | 1.89  |
| ▶ 2.5    | 3     | 15, 20, 25, 32, 40, 50 | 1/2, 3/4, 1, 1½, 2 |         |        | 12             | 15             | 0.046   | 0.138  | 0.250 | 0.499 | 0.780 | 1.06  | 1.34  | 1.62   | 1.90   | 2.2    | 2.5    | 2.7   | 3.0   |
| ▶ 4      | 5     | 15, 20, 25, 32, 40, 50 | 1/2, 3/4, 1, 1½, 2 |         |        | 12             | 15             | 0.047   | 0.24   | 0.44  | 0.84  | 1.24  | 1.64  | 2.0   | 2.4    | 2.8    | 3.2    | 3.6    | 4.1   | 4.5   |
| ▶ 6.3    | 7.5   | 20, 25, 32, 40, 50     | ¾, 1, 1½, 2        |         |        | 24             | 15             | 0.081   | 0.43   | 0.75  | 1.36  | 2.0   | 2.6   | 3.2   | 3.8    | 4.4    | 5.0    | 5.6    | 6.2   | 6.8   |
| ▶ 10     | 12    | 20, 25, 32, 40, 50     | ¾, 1, 1½, 2        |         |        | 24             | 15             | 0.09  | 0.63   | 1.1   | 2.1   | 3.1   | 4.2   | 5.2   | 6.2    | 7.2    | 8.2    | 9.2    | 10.3  | 11.3  |
| ▶ 16     | 20    | 32, 40, 50             | 1½, 2              |         |        | 31             | 15             | 0.26  | 1.19   | 2.0   | 3.6   | 5.1   | 6.7   | 8.3   | 9.9    | 11.4   | 13.1   | 14.9   | 16.7  | 18.5  |
| ▶ 25     | 30    | 40, 50, 65, 80         | 1½, 2, 2½, 3       |         |        | 38             | 15             | 0.42  | 0.77   | 1.22  | 3.0   | 5.6   | 8.1   | 10.7  | 13.2   | 15.8   | 18.4   | 20.9   | 23.5  | 26.1  |
| ▶ 40     | 47    | 50, 65, 80             | 2, 2½, 3           |         |        | 48             | 15             | 0.71  | 1.25   | 1.94  | 4.5   | 8.6   | 12.9  | 17.2  | 21.5   | 25.8   | 30.1   | 34.4   | 38.7  | 43.0  |
| ▶ 60     | 70    | 65, 80                 | 2½, 3              |         |        | 63             | 15             | 0.9   | 4.6    | 8.2   | 15.0  | 21.8  | 28.5  | 35.3  | 41.7   | 47.7   | 53.2   | 58.7   | 64.3  | 69.8  |
| ▶ 63     | 75    | 100, 150               | 4, 6               |         |        | 63             | 30             | 1.7   | 2.5    | 4.6   | 11.4  | 18.5  | 25.6  | 32.7  | 39.9   | 47.0   | 54.1   | 61.2   | 68.3  | 75.4  |
| ▶ 80     | 95    | 80                     | 3                  |         |        | 80             | 15             | 1.2   | 3.6    | 6.2   | 12.5  | 18.8  | 25.6  | 32.3  | 40.0   | 48.7   | 57.4   | 66.1   | 74.7  | 83.4  |
| ▶ 100    | 120   | 80                     | 3                  |         |        | 80             | 19             | 1.3   | 4.5    | 8.6   | 17.8  | 28.3  | 39.4  | 50.8  | 61.8   | 72.4   | 82.9   | 93.4   | 103.9 |       |
| ▶ 100    | 120   | 100, 125, 150          | 4, 6               |         |        | 80             | 30             | 2.5   | 3.8    | 7.8   | 19.5  | 31.2  | 42.9  | 54.6  | 66.2   | 77.9   | 89.6   | 101.3  | 113.0 | 124.7 |
| ▶ 160    | 190   | 100, 125, 150          | 4, 6               |         |        | 100            | 30             | 4.2   | 5.9    | 11.2  | 27.5  | 43.2  | 58.8  | 74.5  | 90.2   | 105.9  | 121.6  | 137.2  | 152.9 | 166.8 |
| ▶ 200    | –     | 125                    | –                  | 110     | 30     | 6.3            | 8.8            | 16.2  | 34.5   | 54.6  | 74.8  | 94.9  | 115.1 | 135.3 | 155.4  | 175.6  | 195.7  | 215.9  |       |       |
| ▶ 250    | 290   | 200, 250, 300          | 8, 10, 12          | 125     | 60     | 6.2            | 10.8           | 19.2  | 41.5   | 69.4  | 97.4  | 125.3 | 153.3 | 181.3 | 209.2  | 237.2  | 265.1  | 293.1  |       |       |
| ▶ 260    | 300   | 150                    | 6                  | 130     | 30     | 5.9            | 8.2            | 12.0  | 25.5   | 51.7  | 81.0  | 114.8 | 150.1 | 182.1 | 213.4  | 244.7  | 276.0  | 303.5  |       |       |
| ▶ 360    | 420   | 200, 250, 300          | 8, 10, 12          | 150     | 60     | 9.2            | 13.4           | 23.2  | 57.3   | 99.5  | 141.8 | 184.1 | 226.3 | 268.6 | 310.9  | 353.1  | 395.4  | 437.7  |       |       |
| ▶ 630    | 735   | 200, 250, 300          | 8, 10, 12          | 200     | 60     | 16.2           | 35.4           | 56.8  | 110.4  | 166.9 | 228.4 | 287.0 | 346.5 | 403.0 | 459.5  | 516.1  | 572.6  | 625.1  |       |       |
| ▶ 1000   | 1150  | 250, 300               | 10, 12             | 250     | 120    | 15.4           | 24.7           | 57.5  | 162.3  | 274.1 | 385.8 | 497.5 | 609.3 | 721.0 | 832.8  | 944.5  | 1056.2 | 1158.0 |       |       |
| ▶ 1500   | 1730  | 300                    | 12                 | 300     | 120    | 20.1           | 33.2           | 89.9  | 238.3  | 383.7 | 529.1 | 674.5 | 819.9 | 965.3 | 1110.7 | 1256.1 | 1401.5 | 1505.3 |       |       |

**Table 3241.3:**  $K_v$  coefficients (m<sup>3</sup>/h) for Type 3241 Globe Valve: Standard plug with flow divider St I, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN             | NPS          | NR   | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $K_v$ coefficient) |       |       |       |       |       |       |       |       |       |        |        |        |
|----------|-------|----------------|--------------|------|------------------|----------------|----------------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
|          |       |                |              |      |                  |                |                | 0   | 5     | 10    | 20    | 30    | 40    | 50    | 60    | 70    | 80    | 90     | 100    | 110    |
| ▶ 1.45   | 1.7   | 15, 20, 25     | ½, ¾, 1      | St I | Equal percentage | 12             | 15             | 0.024   | 0.032 | 0.039 | 0.061 | 0.092 | 0.14  | 0.20  | 0.32  | 0.50  | 0.76  | 1.14   | 1.68   | 2.6    |
| ▶ 2.2    | 2.6   | 15, 20, 25     | ½, ¾, 1      |      |                  | 12             | 15             | 0.022   | 0.025 | 0.04  | 0.08  | 0.14  | 0.23  | 0.35  | 0.54  | 0.82  | 1.22  | 1.79   | 2.7    | 3.7    |
| ▶ 3.6    | 4.2   | 15, 20, 25     | ½, ¾, 1      |      |                  | 12             | 15             | 0.066   | 0.081 | 0.10  | 0.16  | 0.25  | 0.37  | 0.57  | 0.86  | 1.32  | 2.2   | 3.3    | 4.0    | 4.4    |
| ▶ 5.7    | 7     | 32, 40, 50     | 1½, 2        |      |                  | 24             | 15             | 0.14  | 0.17  | 0.21  | 0.30  | 0.42  | 0.63  | 0.94  | 1.34  | 2.00  | 2.9   | 4.2    | 6.3    | 8.6    |
| ▶ 9      | 10.5  | 32, 40, 50     | 1½, 2        |      |                  | 24             | 15             | 0.13  | 0.23  | 0.29  | 0.47  | 0.70  | 1.02  | 1.46  | 2.1   | 3.0   | 4.6   | 8.0    | 10.3   | 12.0   |
| ▶ 14.5   | 17    | 32, 40, 50     | 1½, 2        |      |                  | 31             | 15             | 0.27  | 0.37  | 0.48  | 0.70  | 1.07  | 1.62  | 2.3   | 3.4   | 5.0   | 7.8   | 11.6   | 15.3   | 17.8   |
| ▶ 22     | 26    | 40, 50, 65, 80 | 1½, 2, 2½, 3 |      |                  | 38             | 15             | 0.52  | 0.65  | 0.80  | 1.14  | 1.72  | 2.6   | 4.1   | 6.8   | 10.3  | 14.6  | 18.9   | 22.9   | 25.5   |
| ▶ 36     | 42    | 50, 65, 80     | 2, 2½, 3     |      |                  | 48             | 15             | 0.75  | 0.81  | 0.99  | 2.00  | 4.3   | 8.1   | 13.3  | 18.6  | 23.6  | 28.1  | 32.0   | 35.7   | 38.5   |
| ▶ 54     | 62    | 65, 80         | 2½, 3        |      |                  | 63             | 15             | 1.7   | 1.9   | 2.2   | 3.3   | 5.6   | 10.4  | 18.4  | 26.3  | 33.8  | 40.4  | 46.0   | 51.3   | 54.7   |
| ▶ 57     | 67    | 100, 150       | 4, 6         |      |                  | 63             | 30             | 1.6   | 2.0   | 2.5   | 3.5   | 5.1   | 7.2   | 10.4  | 14.4  | 21.4  | 33.0  | 45.5   | 56.7   | 64.8   |
| ▶ 72     | 85    | 80             | 3            |      |                  | 80             | 15             | 2.4   | 3.0   | 3.7   | 5.4   | 7.9   | 11.9  | 19.5  | 28.4  | 38.2  | 47.3  | 58.3   | 66.6   | 73.6   |
| ▶ 90     | 105   | 100, 125, 150  | 4, 6         |      |                  | 80             | 30             | 1.1   | 1.4   | 2.0   | 3.4   | 5.6   | 8.4   | 13.6  | 22.9  | 39.4  | 56.0  | 73.3   | 87.3   | 100.6  |
| ▶ 144    | 170   | 100, 150       | 4, 6         |      |                  | 100            | 30             | 3.8   | 4.6   | 5.4   | 7.7   | 11.1  | 17.5  | 31.2  | 51.2  | 75.1  | 94.5  | 115.9  | 133.3  | 146.7  |
| ▶ 180    | 210   | 125            | –            |      |                  | 110            | 30             | 4.1   | 5.6   | 6.7   | 9.6   | 12.6  | 17.1  | 26.9  | 44.3  | 76.3  | 108.2 | 141.7  | 168.9  | 188.5  |
| ▶ 225    | 265   | 200, 250, 300  | 8, 10, 12    |      |                  | 125            | 60             | 6.9   | 8.3   | 10.0  | 14.1  | 20.3  | 28.8  | 41.9  | 59.3  | 89.1  | 132.6 | 186.4  | 231.2  | 267.3  |
| ▶ 234    | 275   | 150            | 6            |      |                  | 130            | 30             | 7.0   | 8.4   | 11.1  | 19.5  | 36.8  | 63.1  | 90.7  | 116.7 | 144.1 | 173.2 | 199.9  | 224.5  | 245.9  |
| ▶ 320    | 375   | 200, 250, 300  | 8, 10, 12    |      |                  | 150            | 60             | 8.2   | 10.4  | 13.2  | 19.6  | 28.6  | 41.4  | 57.9  | 91.9  | 153.2 | 221.4 | 291.9  | 357.4  | 407.3  |
| ▶ 560    | 650   | 200, 250, 300  | 8, 10, 12    |      |                  | 200            | 60             | 14.5  | 18.1  | 22.3  | 34.6  | 58.2  | 102.9 | 182.1 | 271.2 | 372.1 | 440.0 | 496.0  | 528.2  | 553.7  |
| ▶ 900    | 1040  | 250, 300       | 10, 12       |      |                  | 250            | 120            | 13.9  | 19.5  | 27.5  | 46.2  | 71.5  | 106.5 | 160.0 | 234.4 | 359.9 | 550.1 | 757.4  | 962.1  | 1059.8 |
| ▶ 1350   | 1560  | 300            | 12           |      |                  | 300            | 120            | 20.1  | 28.2  | 39.7  | 66.7  | 103.2 | 153.9 | 231.2 | 338.5 | 514.6 | 752.1 | 1014.7 | 1256.6 | 1359.7 |

**Table 3241.4:**  $K_V$  coefficients ( $m^3/h$ ) for Type 3241 Globe Valve: Standard plug with flow divider St I, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $K_{Vs}$ | $C_V$ | DN             | NPS          | NR   | CH     | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $K_V$ coefficient) |      |      |       |       |       |       |       |       |       |        |        |        |
|----------|-------|----------------|--------------|------|--------|----------------|----------------|---|------|------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
|          |       |                |              |      |        |                |                | 0   | 5    | 10   | 20    | 30    | 40    | 50    | 60    | 70    | 80    | 90     | 100    | 110    |
| ▶ 1.45   | 1.7   | 15, 20, 25     | ½, ¾, 1      | St I | Linear | 12             | 15             | 0.016   | 0.09 | 0.16 | 0.32  | 0.49  | 0.66  | 0.83  | 0.99  | 1.16  | 1.33  | 1.49   | 1.7    | 1.8    |
| ▶ 2.2    | 2.6   | 15, 20, 25     | ½, ¾, 1      |      |        | 12             | 15             | 0.028   | 0.11 | 0.22 | 0.46  | 0.75  | 1.03  | 1.32  | 1.60  | 1.9   | 2.2   | 2.5    | 2.7    | 3.0    |
| ▶ 3.6    | 4.2   | 15, 20, 25     | ½, ¾, 1      |      |        | 12             | 15             | 0.017   | 0.21 | 0.43 | 0.82  | 1.20  | 1.58  | 2.0   | 2.3   | 2.7   | 3.1   | 3.5    | 3.8    | 4.2    |
| ▶ 5.7    | 7     | 32, 40, 50     | 1½, 2        |      |        | 24             | 15             | 0.1   | 0.4  | 0.7  | 1.4   | 2.0   | 2.6   | 3.2   | 3.8   | 4.4   | 5.0   | 5.6    | 6.2    | 6.8    |
| ▶ 9      | 10.5  | 32, 40, 50     | 1½, 2        |      |        | 24             | 15             | 0.09  | 0.63 | 1.12 | 2.1   | 3.1   | 4.1   | 5.1   | 6.1   | 7.1   | 8.1   | 9.2    | 10.2   | 11.2   |
| ▶ 14.5   | 17    | 32, 40, 50     | 1½, 2        |      |        | 31             | 15             | 0.26  | 1.19 | 2.0  | 3.4   | 4.9   | 6.3   | 7.8   | 9.3   | 10.8  | 12.3  | 13.9   | 15.5   | 17.1   |
| ▶ 22     | 26    | 40, 50, 65, 80 | 1½, 2, 2½, 3 |      |        | 38             | 15             | 0.42  | 0.77 | 1.22 | 2.8   | 5.2   | 7.6   | 9.9   | 12.3  | 14.7  | 17.1  | 19.5   | 21.9   | 24.2   |
| ▶ 36     | 42    | 50, 65, 80     | 2, 2½, 3     |      |        | 48             | 15             | 0.71  | 1.25 | 1.94 | 4.3   | 8.2   | 12.2  | 16.2  | 20.2  | 24.3  | 28.3  | 32.4   | 36.4   | 40.4   |
| ▶ 54     | 62    | 65, 80         | 2, 2½, 3     |      |        | 63             | 15             | 0.90  | 4.6  | 8.2  | 14.6  | 20.3  | 25.7  | 30.9  | 36.3  | 41.5  | 46.3  | 51.1   | 55.9   | 60.8   |
| ▶ 57     | 67    | 100, 150       | 4, 6         |      |        | 63             | 30             | 1.7   | 2.5  | 4.6  | 10.9  | 17.6  | 24.2  | 30.8  | 37.5  | 44.2  | 50.8  | 57.5   | 64.2   | 70.9   |
| ▶ 72     | 85    | 80             | 3            |      |        | 80             | 15             | 1.2   | 3.6  | 6.2  | 12.5  | 18.8  | 25.6  | 32.3  | 39.2  | 46.0  | 52.8  | 59.6   | 66.3   | 73.2   |
| ▶ 90     | 105   | 100, 125, 150  | 4, 6         |      |        | 80             | 30             | 2.5   | 3.8  | 7.5  | 17.4  | 27.8  | 38.2  | 48.0  | 58.3  | 68.6  | 78.9  | 89.2   | 99.5   | 109.7  |
| ▶ 144    | 170   | 100, 150       | 4, 6         |      |        | 100            | 30             | 4.2   | 5.9  | 11.2 | 24.5  | 38.5  | 52.5  | 65.6  | 79.4  | 93.2  | 107.0 | 120.8  | 134.6  | 146.8  |
| ▶ 180    | 210   | 125            | -            |      |        | 110            | 30             | 6.3   | 8.8  | 15.0 | 30.7  | 48.7  | 65.8  | 83.5  | 101.3 | 119.0 | 136.8 | 154.5  | 172.3  | 190.0  |
| ▶ 225    | 265   | 200, 250, 300  | 8, 10, 12    |      |        | 125            | 60             | 6.2   | 10.8 | 18.3 | 38.5  | 63.9  | 89.6  | 115.3 | 141.0 | 166.8 | 192.5 | 218.2  | 243.9  | 269.7  |
| ▶ 234    | 275   | 150            | 6            |      |        | 130            | 30             | 5.9   | 8.2  | 12.0 | 25.5  | 51.7  | 77.8  | 103.9 | 130.1 | 156.2 | 182.3 | 208.5  | 234.6  | 260.7  |
| ▶ 320    | 375   | 200, 250, 300  | 8, 10, 12    |      |        | 150            | 60             | 9.2   | 13.4 | 21.7 | 51.6  | 88.6  | 126.2 | 163.8 | 201.4 | 239.1 | 276.7 | 314.3  | 351.9  | 389.5  |
| ▶ 560    | 650   | 200, 250, 300  | 8, 10, 12    |      |        | 200            | 60             | 16.2  | 35.4 | 53.8 | 101.4 | 151.9 | 207.9 | 261.1 | 315.3 | 366.7 | 418.2 | 469.6  | 521.1  | 571.9  |
| ▶ 900    | 1040  | 250, 300       | 10, 12       |      |        | 250            | 120            | 15.4  | 24.7 | 54.1 | 147.7 | 246.6 | 347.2 | 447.8 | 548.3 | 648.9 | 749.5 | 850.0  | 950.6  | 1042.2 |
| ▶ 1350   | 1560  | 300            | 12           |      |        | 300            | 120            | 20.1  | 33.2 | 84.5 | 214.5 | 345.3 | 476.2 | 607.1 | 737.9 | 868.8 | 999.6 | 1130.5 | 1261.3 | 1354.7 |

**Table 3241.5:**  $K_v$  coefficients (m<sup>3</sup>/h) for Type 3241 Globe Valve: Standard plug with flow divider St II, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN             | NPS          | NR    | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $K_v$ coefficient) |      |      |      |       |       |       |       |       |       |       |        |        |
|----------|-------|----------------|--------------|-------|------------------|----------------|----------------|---|------|------|------|-------|-------|-------|-------|-------|-------|-------|--------|--------|
|          |       |                |              |       |                  |                |                | 0   | 5    | 10   | 20   | 30    | 40    | 50    | 60    | 70    | 80    | 90    | 100    | 110    |
| ▶ 8      | 9.5   | 32, 40, 50     | 1½, 2        | St II | Equal percentage | 24             | 15             | 0.13  | 0.23 | 0.29 | 0.47 | 0.70  | 1.02  | 1.46  | 2.1   | 3.0   | 4.6   | 7.9   | 10.2   | 11.9   |
| ▶ 13     | 15    | 32, 40, 50     | 1½, 2        |       |                  | 31             | 15             | 0.27  | 0.37 | 0.48 | 0.70 | 1.07  | 1.62  | 2.3   | 3.4   | 5.0   | 7.7   | 11.3  | 14.8   | 17.3   |
| ▶ 20     | 23    | 40, 50, 65, 80 | 1½, 2, 2½, 3 |       |                  | 38             | 15             | 0.52  | 0.65 | 0.80 | 1.14 | 1.72  | 2.6   | 4.1   | 6.8   | 10.3  | 14.5  | 18.7  | 22.6   | 25.2   |
| ▶ 32     | 37    | 50, 65, 80     | 2, 2½, 3     |       |                  | 48             | 15             | 0.75  | 0.81 | 0.99 | 2.00 | 4.3   | 8.1   | 13.3  | 18.6  | 23.5  | 27.9  | 31.7  | 35.4   | 38.1   |
| ▶ 48     | 56    | 65, 80         | 2½, 3        |       |                  | 63             | 15             | 1.7   | 1.9  | 2.2  | 3.3  | 5.6   | 10.4  | 18.4  | 25.8  | 33.1  | 38.4  | 42.6  | 46.2   | 49.1   |
| ▶ 50     | 60    | 100, 150       | 4, 6         |       |                  | 63             | 30             | 1.6   | 2.0  | 2.5  | 3.5  | 5.1   | 7.2   | 10.4  | 14.5  | 21.7  | 32.2  | 43.8  | 53.5   | 60.8   |
| ▶ 80     | 95    | 100, 125, 150  | 4, 6         |       |                  | 80             | 30             | 1.1   | 1.4  | 2.0  | 3.4  | 5.6   | 8.4   | 13.6  | 22.5  | 38.5  | 55.1  | 69.6  | 81.3   | 91.9   |
| ▶ 125    | 145   | 100, 150       | 4, 6         |       |                  | 100            | 30             | 3.8   | 4.6  | 5.4  | 7.7  | 11.1  | 17.5  | 31.2  | 50.3  | 73.1  | 91.9  | 108.4 | 121.4  | 130.7  |
| ▶ 160    | 190   | 125            | –            |       |                  | 110            | 30             | 4.1   | 5.6  | 6.7  | 9.6  | 12.6  | 17.1  | 26.9  | 43.5  | 74.4  | 106.5 | 134.7 | 157.4  | 172.2  |
| ▶ 200    | 235   | 200, 250, 300  | 8, 10, 12    |       |                  | 125            | 60             | 6.9   | 8.3  | 10.0 | 14.1 | 20.3  | 28.8  | 41.9  | 58.4  | 86.9  | 128.8 | 174.5 | 211.1  | 239.2  |
| ▶ 210    | 245   | 150            | 6            |       |                  | 130            | 30             | 7.0   | 8.4  | 11.1 | 19.5 | 36.8  | 63.1  | 90.7  | 116.7 | 143.4 | 168.4 | 192.4 | 213.2  | 232.4  |
| ▶ 290    | 335   | 200, 250, 300  | 8, 10, 12    |       |                  | 150            | 60             | 8.2   | 10.4 | 13.2 | 19.6 | 28.6  | 41.4  | 57.9  | 90.4  | 149.3 | 212.4 | 271.8 | 323.8  | 361.0  |
| ▶ 500    | 580   | 200, 250, 300  | 8, 10, 12    |       |                  | 200            | 60             | 14.5  | 18.1 | 22.3 | 34.6 | 58.2  | 102.9 | 182.1 | 271.2 | 367.9 | 425.5 | 471.7 | 496.5  | 517.2  |
| ▶ 800    | 950   | 250, 300       | 10, 12       |       |                  | 250            | 120            | 13.9  | 19.5 | 27.5 | 46.2 | 71.5  | 106.5 | 160.0 | 234.4 | 358.1 | 535.6 | 730.4 | 917.1  | 1005.7 |
| ▶ 1200   | 1400  | 300            | 12           |       |                  | 300            | 120            | 20.1  | 28.2 | 39.7 | 66.7 | 103.2 | 153.9 | 231.2 | 332.4 | 501.1 | 724.2 | 948.9 | 1144.9 | 1247.9 |



**Table 3241.6:**  $K_v$  coefficients (m<sup>3</sup>/h) for Type 3241 Globe Valve: Standard plug with flow divider St II, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN             | NPS          | NR    | CH     | Seat Ø [mm] | Travel [mm] | Travel in % · Flow coefficient ( $K_v$ coefficient) |      |      |       |       |       |       |       |       |       |        |        |        |
|----------|-------|----------------|--------------|-------|--------|-------------|-------------|---|------|------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
|          |       |                |              |       |        |             |             | 0   | 5    | 10   | 20    | 30    | 40    | 50    | 60    | 70    | 80    | 90     | 100    | 110    |
| ▶ 8      | 9.5   | 32, 40, 50     | 1½, 2        | St II | Linear | 24          | 15          | 0.09  | 0.63 | 1.12 | 2.1   | 3.1   | 4.1   | 5.1   | 6.1   | 7.1   | 8.1   | 9.1    | 10.1   | 11.1   |
| ▶ 13     | 15    | 32, 40, 50     | 1½, 2        |       |        | 31          | 15          | 0.26  | 1.19 | 2.0  | 3.4   | 4.8   | 6.2   | 7.6   | 9.1   | 10.5  | 12.0  | 13.7   | 15.3   | 16.8   |
| ▶ 20     | 23    | 40, 50, 65, 80 | 1½, 2, 2½, 3 |       |        | 38          | 15          | 0.42  | 0.77 | 1.22 | 2.8   | 5.2   | 7.5   | 9.8   | 12.2  | 14.5  | 16.9  | 19.3   | 21.6   | 24.0   |
| ▶ 32     | 37    | 50, 65, 80     | 2, 2½, 3     |       |        | 48          | 15          | 0.71  | 1.25 | 1.94 | 4.2   | 8.2   | 12.1  | 16.0  | 20.0  | 24.0  | 28.0  | 32.0   | 36.0   | 40.0   |
| ▶ 48     | 56    | 65, 80         | 2½, 3        |       |        | 63          | 15          | 0.90  | 4.6  | 8.2  | 14.0  | 19.5  | 24.6  | 29.8  | 35.1  | 40.0  | 44.7  | 49.3   | 54.0   | 58.7   |
| ▶ 50     | 60    | 100, 150       | 4, 6         |       |        | 63          | 30          | 1.7   | 2.5  | 4.6  | 10.8  | 17.5  | 24.0  | 30.4  | 37.1  | 43.7  | 50.3  | 56.9   | 63.5   | 70.2   |
| ▶ 80     | 95    | 100, 125, 150  | 4, 6         |       |        | 80          | 30          | 2.5   | 3.8  | 7.5  | 16.7  | 26.7  | 36.7  | 45.8  | 55.6  | 65.5  | 75.3  | 85.1   | 94.9   | 104.8  |
| ▶ 125    | 145   | 100, 150       | 4, 6         |       |        | 100         | 30          | 4.2   | 5.9  | 11.2 | 23.5  | 37.0  | 50.4  | 62.6  | 75.8  | 88.9  | 102.1 | 115.3  | 128.4  | 140.2  |
| ▶ 160    | 190   | 125            | -            |       |        | 110         | 30          | 6.3   | 8.8  | 14.4 | 28.9  | 45.8  | 61.3  | 77.8  | 94.4  | 110.9 | 127.4 | 144.0  | 160.5  | 177.0  |
| ▶ 200    | 235   | 200, 250, 300  | 8, 10, 12    |       |        | 125         | 60          | 6.2   | 10.8 | 17.3 | 35.5  | 58.3  | 81.8  | 105.3 | 128.8 | 152.3 | 175.7 | 199.2  | 222.7  | 246.2  |
| ▶ 210    | 245   | 150            | 6            |       |        | 130         | 30          | 5.9   | 8.2  | 12.0 | 25.5  | 46.7  | 69.8  | 94.9  | 120.0 | 145.7 | 170.7 | 195.7  | 220.8  | 242.8  |
| ▶ 290    | 335   | 200, 250, 300  | 8, 10, 12    |       |        | 150         | 60          | 9.2   | 13.4 | 22.1 | 53.1  | 86.5  | 120.4 | 154.3 | 188.2 | 222.0 | 255.9 | 289.8  | 323.7  | 357.5  |
| ▶ 500    | 580   | 200, 250, 300  | 8, 10, 12    |       |        | 200         | 60          | 16.2  | 35.4 | 52.1 | 96.5  | 143.5 | 196.5 | 246.8 | 298.0 | 346.6 | 395.2 | 443.8  | 492.4  | 537.6  |
| ▶ 800    | 950   | 250, 300       | 10, 12       |       |        | 250         | 120         | 15.4  | 24.7 | 52.7 | 141.9 | 235.7 | 331.8 | 427.9 | 524.0 | 620.1 | 716.2 | 812.3  | 908.4  | 995.9  |
| ▶ 1200   | 1400  | 300            | 12           |       |        | 300         | 120         | 20.1  | 33.2 | 80.2 | 195.4 | 314.6 | 433.9 | 553.1 | 672.3 | 791.5 | 910.8 | 1030.0 | 1149.2 | 1234.3 |

**Table 3241.7:**  $K_V$  coefficients ( $m^3/h$ ) for Type 3241 Globe Valve: Standard plug with flow divider St III, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{Vs}$ | $C_V$ | DN            | NPS       | NR     | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $K_V$ coefficient) |      |      |      |      |       |       |       |       |       |       |       |       |
|----------|-------|---------------|-----------|--------|------------------|----------------|----------------|---|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|
|          |       |               |           |        |                  |                |                | 0   | 5    | 10   | 20   | 30   | 40    | 50    | 60    | 70    | 80    | 90    | 100   | 110   |
| ▶ 7.5    | 9     | 50            | 2         | St III | Equal percentage | 24             | 15             | 0.13  | 0.23 | 0.29 | 0.47 | 0.70 | 1.02  | 1.46  | 2.1   | 3.0   | 4.5   | 7.8   | 9.9   | 11.6  |
| ▶ 20     | 23    | 65, 80        | 2½, 3     |        |                  | 38             | 15             | 0.52  | 0.65 | 0.80 | 1.1  | 1.7  | 2.6   | 4.1   | 6.8   | 10.3  | 14.4  | 18.6  | 22.4  | 24.9  |
| ▶ 30     | 35    | 65, 80        | 2½, 3     |        |                  | 48             | 15             | 0.75  | 0.81 | 0.99 | 2.00 | 4.3  | 8.1   | 13.3  | 18.6  | 23.5  | 27.8  | 31.5  | 35.0  | 37.6  |
| ▶ 47     | 55    | 100, 150      | 4, 6      |        |                  | 63             | 30             | 1.6   | 2.0  | 2.5  | 3.5  | 4.8  | 6.4   | 8.6   | 12.0  | 18.1  | 28.4  | 40.9  | 52.2  | 59.7  |
| ▶ 75     | –     | 125, 150      | 6         |        |                  | 80             | 30             | 1.1   | 1.4  | 2.0  | 3.4  | 5.6  | 8.4   | 13.6  | 22.4  | 38.3  | 54.5  | 68.4  | 79.4  | 89.2  |
| ▶ 120    | 140   | 150           | 6         |        |                  | 100            | 30             | 3.8   | 4.6  | 5.4  | 7.7  | 11.1 | 17.5  | 31.2  | 50.1  | 72.6  | 90.5  | 105.6 | 117.0 | 125.1 |
| ▶ 190    | 220   | 200, 250, 300 | 8, 10, 12 |        |                  | 125            | 60             | 6.9   | 8.3  | 10.0 | 14.1 | 20.3 | 28.8  | 41.9  | 58.3  | 86.5  | 127.5 | 171.5 | 206.0 | 232.5 |
| ▶ 270    | 315   | 200, 250, 300 | 8, 10, 12 |        |                  | 150            | 60             | 8.2   | 10.4 | 13.2 | 19.6 | 28.6 | 41.4  | 57.9  | 84.7  | 128.4 | 182.5 | 242.5 | 306.4 | 337.1 |
| ▶ 480    | 560   | 250, 300      | 10, 12    |        |                  | 200            | 60             | 14.5  | 18.1 | 22.3 | 34.6 | 58.2 | 102.9 | 182.1 | 271.2 | 366.5 | 423.1 | 468.0 | 491.2 | 511.1 |
| ▶ 750    | 880   | 300           | 12        |        |                  | 250            | 120            | 13.9  | 19.5 | 27.5 | 46.2 | 71.5 | 106.5 | 160.0 | 234.4 | 357.4 | 529.7 | 719.6 | 899.1 | 984.0 |

**Table 3241.8:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3241 Globe Valve: Standard plug with flow divider St III, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN            | NPS       | NR     | CH     | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $K_v$ coefficient) |      |      |       |       |       |       |       |       |       |       |       |       |
|----------|-------|---------------|-----------|--------|--------|----------------|----------------|---|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|          |       |               |           |        |        |                |                | 0   | 5    | 10   | 20    | 30    | 40    | 50    | 60    | 70    | 80    | 90    | 100   | 110   |
| ▶ 7.5    | 9     | 50            | 2         | St III | Linear | 24             | 15             | 0.09  | 0.63 | 1.12 | 2.1   | 3.1   | 4.1   | 5.0   | 6.0   | 7.0   | 8.0   | 9.0   | 10.0  | 10.9  |
| ▶ 20     | 23    | 65, 80        | 2½, 3     |        |        | 38             | 15             | 0.42  | 0.77 | 1.22 | 2.8   | 5.2   | 7.5   | 9.7   | 12.1  | 14.4  | 16.7  | 19.1  | 21.4  | 23.7  |
| ▶ 30     | 35    | 65, 80        | 2½, 3     |        |        | 48             | 15             | 0.71  | 1.25 | 1.94 | 4.2   | 8.1   | 12.0  | 15.9  | 19.8  | 23.8  | 27.7  | 31.7  | 35.6  | 39.6  |
| ▶ 47     | 55    | 100, 150      | 4, 6      |        |        | 63             | 30             | 1.72  | 2.5  | 4.6  | 10.7  | 17.3  | 23.8  | 30.1  | 36.7  | 43.2  | 49.8  | 56.3  | 62.9  | 69.4  |
| ▶ 75     | –     | 125, 150      | 6         |        |        | 80             | 30             | 2.5   | 3.8  | 7.5  | 16.3  | 26.1  | 35.9  | 44.7  | 54.3  | 63.9  | 73.5  | 83.1  | 92.7  | 102.3 |
| ▶ 120    | 140   | 150           | 6         |        |        | 100            | 30             | 4.2   | 5.9  | 11.2 | 23.0  | 36.2  | 49.3  | 61.1  | 74.0  | 86.8  | 99.7  | 112.5 | 125.4 | 136.8 |
| ▶ 190    | 220   | 200, 250, 300 | 8, 10, 12 |        |        | 125            | 60             | 6.2   | 10.8 | 17.1 | 34.7  | 56.9  | 79.8  | 102.8 | 125.7 | 148.6 | 171.6 | 194.5 | 217.4 | 240.3 |
| ▶ 270    | 315   | 200, 250, 300 | 8, 10, 12 |        |        | 150            | 60             | 9.2   | 13.4 | 20.3 | 46.4  | 78.6  | 112.0 | 145.4 | 178.8 | 212.2 | 245.6 | 279.0 | 312.4 | 345.8 |
| ▶ 480    | 560   | 250, 300      | 10, 12    |        |        | 200            | 60             | 16.2  | 35.4 | 51.7 | 95.5  | 141.9 | 194.2 | 243.9 | 294.5 | 342.6 | 390.6 | 438.7 | 486.7 | 531.4 |
| ▶ 750    | 880   | 300           | 12        |        |        | 250            | 120            | 15.4  | 24.7 | 52.4 | 140.4 | 232.9 | 327.9 | 422.9 | 517.9 | 612.9 | 707.8 | 802.8 | 897.8 | 984.3 |

**Table 3241.9:**  $K_V$  coefficients ( $m^3/h$ ) for Type 3241 Globe Valve: AC-1 Trim with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{Vs}$ | $C_v$ | DN            | NPS       | NR   | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $K_V$ coefficient) |       |       |      |      |      |       |       |       |       |       |       |        |
|----------|-------|---------------|-----------|------|------------------|----------------|----------------|---|-------|-------|------|------|------|-------|-------|-------|-------|-------|-------|--------|
|          |       |               |           |      |                  |                |                | 0   | 5     | 10    | 20   | 30   | 40   | 50    | 60    | 70    | 80    | 90    | 100   | 110    |
| ▶ 22     | 26    | 50, 80, 100   | 2, 3, 4   | AC-1 | Equal percentage | 38             | 15             | 0.35  | 0.42  | 0.55  | 0.9  | 1.5  | 2.3  | 3.4   | 5.0   | 7.8   | 12.5  | 17.1  | 21.4  | 24.5   |
| ▶ 35     | 40    | 50, 80        | 2, 3      |      |                  | 48             | 15             | 0.57  | 0.65  | 0.82  | 1.4  | 2.4  | 3.7  | 5.7   | 8.4   | 13.0  | 23.0  | 30.9  | 36.0  | 39.8   |
| ▶ 38     | 45    | 100           | 4         |      |                  | 48             | 15             | 0.69  | 0.85  | 1.1   | 1.7  | 2.7  | 4.0  | 5.9   | 8.7   | 13.1  | 19.6  | 28.8  | 39.7  | 50.2   |
| ▶ 50     | 60    | 80            | 3         |      |                  | 63             | 15             | 0.92  | 1.1   | 1.4   | 2.3  | 3.6  | 5.3  | 7.8   | 11.5  | 17.3  | 25.7  | 37.9  | 51.1  | 63.7   |
| ▶ 55     | 65    | 100           | 4         |      |                  | 63             | 30             | 1.0   | 1.2   | 1.6   | 2.5  | 3.9  | 5.8  | 8.5   | 12.6  | 19.0  | 28.3  | 41.7  | 57.4  | 72.7   |
| ▶ 75     | 90    | 100           | 4         |      |                  | 80             | 30             | 1.4   | 1.7   | 2.1   | 3.4  | 5.3  | 7.9  | 11.7  | 17.2  | 25.9  | 38.6  | 56.9  | 76.7  | 95.5   |
| ▶ 95     | 110   | 150           | 6         |      |                  | 80             | 30             | 1.7   | 2.1   | 2.7   | 4.3  | 6.7  | 10.1 | 14.8  | 21.8  | 32.8  | 48.9  | 72.1  | 99.1  | 125.5  |
| ▶ 145    | 170   | 150           | 6         |      |                  | 100            | 30             | 2.6   | 3.2   | 4.1   | 6.6  | 10.3 | 15.3 | 22.5  | 33.3  | 50.0  | 74.7  | 110.0 | 148.3 | 184.6  |
| ▶ 155    | 180   | 200, 250      | 8, 10     |      |                  | 100            | 30             | 2.8   | 3.5   | 4.4   | 7.1  | 11.0 | 16.4 | 24.1  | 35.6  | 53.5  | 79.8  | 117.6 | 161.7 | 204.8  |
| ▶ 205    | 240   | 150           | 6         |      |                  | 125            | 30             | 4.4   | 5.1   | 6.2   | 10.3 | 16.1 | 24.4 | 34.6  | 49.9  | 72.6  | 102.9 | 140.5 | 187.1 | 213.5  |
| ▶ 230    | 270   | 200, 250, 300 | 8, 10, 12 |      |                  | 125            | 60             | 4.2   | 5.1   | 6.5   | 10.5 | 16.3 | 24.3 | 35.7  | 52.8  | 79.4  | 118.4 | 174.5 | 240.0 | 303.9  |
| ▶ 305    | 360   | 200, 250, 300 | 8, 10, 12 |      |                  | 150            | 60             | 5.6   | 6.8   | 8.6   | 13.9 | 21.7 | 32.3 | 47.4  | 70.1  | 105.3 | 157.0 | 228.7 | 318.3 | 402.8  |
| ▶ 360    | 420   | 200, 250      | 8, 10     |      |                  | 200            | 60             | 6.0   | 7.3   | 9.0   | 14.3 | 22.0 | 32.6 | 48.8  | 72.6  | 106.8 | 166.6 | 265.7 | 358.0 | 413.7  |
| ▶ 480    | 560   | 200, 250, 300 | 8, 10, 12 |      |                  | 200            | 60             | 10.2  | 12.3  | 16.0  | 25.6 | 39.8 | 60.2 | 89.3  | 136.6 | 219.5 | 315.3 | 415.5 | 481.2 | 521.3  |
| ▶ 1000   | 1150  | 300           | 12        |      |                  | 250            | 120            | 13.81   | 16.54 | 21.48 | 37.5 | 62.1 | 95.1 | 142.7 | 215.3 | 318.1 | 472.2 | 718.0 | 955.5 | 1087.9 |

**Table 3241.10:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3241 Globe Valve: AC-2 Trim with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN       | NPS   | NR   | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $K_v$ coefficient) |      |      |      |      |      |      |       |       |       |       |       |       |
|----------|-------|----------|-------|------|------------------|----------------|----------------|---|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|
|          |       |          |       |      |                  |                |                | 0   | 5    | 10   | 20   | 30   | 40   | 50   | 60    | 70    | 80    | 90    | 100   | 110   |
| ▶ 135    | 160   | 200, 250 | 8, 10 | AC-2 | Equal percentage | 200            | 60             | 8.1   | 9.3  | 11.5 | 18.6 | 28.3 | 41.1 | 58.0 | 79.7  | 105.4 | 121.2 | 130.2 | 135.1 | 138.9 |
| ▶ 145    | 170   | 200, 250 | 8, 10 |      |                  | 200            | 60             | 13.1  | 15.0 | 17.8 | 24.9 | 33.8 | 45.8 | 62.3 | 85.6  | 113.2 | 130.1 | 139.5 | 145.3 | 148.8 |
| ▶ 155    | 180   | 200, 250 | 8, 10 |      |                  | 200            | 60             | 14.0  | 16.0 | 18.9 | 26.9 | 36.1 | 49.0 | 66.6 | 91.5  | 121.0 | 139.1 | 149.1 | 155.4 | 159.1 |
| ▶ 160    | 190   | 200, 250 | 8, 10 |      |                  | 200            | 60             | 14.5  | 16.6 | 19.5 | 27.7 | 37.3 | 50.6 | 68.7 | 94.5  | 124.9 | 143.6 | 153.9 | 160.4 | 165.3 |
| ▶ 170    | 200   | 200, 250 | 8, 10 |      |                  | 200            | 60             | 15.4  | 17.6 | 20.8 | 29.5 | 39.6 | 53.7 | 73.0 | 100.4 | 132.7 | 152.6 | 162.9 | 168.8 | 173.8 |
| ▶ 180    | 210   | 200, 250 | 8, 10 |      |                  | 200            | 60             | 10.9  | 12.4 | 15.4 | 24.8 | 37.7 | 54.8 | 77.3 | 106.3 | 140.5 | 161.6 | 172.4 | 178.3 | 183.2 |
| ▶ 190    | 220   | 200, 250 | 8, 10 |      |                  | 200            | 60             | 11.5  | 13.1 | 16.2 | 26.2 | 39.8 | 57.8 | 81.6 | 112.2 | 148.4 | 170.5 | 181.0 | 186.7 | 191.2 |
| ▶ 205    | 240   | 200, 250 | 8, 10 |      |                  | 200            | 60             | 10.4  | 12.3 | 15.3 | 24.1 | 36.8 | 53.8 | 76.8 | 108.4 | 151.0 | 181.1 | 195.7 | 203.3 | 208.1 |
| ▶ 220    | 255   | 200, 250 | 8, 10 |      |                  | 200            | 60             | 11.1  | 13.3 | 16.3 | 26.0 | 39.5 | 57.7 | 82.4 | 116.3 | 162.1 | 194.3 | 210.0 | 217.6 | 221.6 |
| ▶ 250    | 290   | 200, 250 | 8, 10 |      |                  | 200            | 60             | 10.3  | 12.3 | 15.4 | 24.9 | 38.1 | 56.6 | 81.6 | 118.1 | 174.2 | 216.8 | 240.4 | 251.4 | 257.4 |
| ▶ 260    | 305   | 200, 250 | 8, 10 |      |                  | 200            | 60             | 10.7  | 12.8 | 16.2 | 25.9 | 39.7 | 58.8 | 84.8 | 122.9 | 181.2 | 225.4 | 250.0 | 261.5 | 267.7 |
| ▶ 280    | 325   | 200, 250 | 8, 10 |      |                  | 200            | 60             | 7.1   | 8.0  | 9.8  | 15.9 | 24.5 | 35.8 | 53.2 | 77.6  | 111.8 | 164.2 | 233.3 | 280.5 | 306.3 |
| ▶ 320    | 375   | 200, 250 | 8, 10 |      |                  | 200            | 60             | 10.2  | 11.9 | 14.9 | 25.5 | 39.2 | 59.0 | 87.2 | 128.5 | 196.6 | 252.6 | 293.2 | 318.1 | 329.2 |

**Table 3241.11:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3241 Globe Valve: Perforated plug without flow divider, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                           | NPS             | NR              | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $K_v$ coefficient) |       |      |      |      |       |       |       |       |       |       |        |        |
|----------|-------|------------------------------|-----------------|-----------------|------------------|----------------|----------------|---|-------|------|------|------|-------|-------|-------|-------|-------|-------|--------|--------|
|          |       |                              |                 |                 |                  |                |                | 0   | 5     | 10   | 20   | 30   | 40    | 50    | 60    | 70    | 80    | 90    | 100    | 110    |
| ▶ 4      | 5     | 25, 32, 40, 50               | 1, 1½, 2        | Perforated plug | Equal percentage | 24             | 15             | 0.028   | 0.075 | 0.12 | 0.18 | 0.26 | 0.39  | 0.58  | 0.86  | 1.3   | 1.8   | 2.7   | 4.1    | 5.4    |
| ▶ 6.3    | 7.5   | 25, 32, 40, 50, 65, 80       | 1, 1½, 2, 2½, 3 |                 |                  | 24             | 15             | 0.063   | 0.15  | 0.19 | 0.28 | 0.44 | 0.62  | 0.92  | 1.5   | 2.2   | 3.2   | 4.5   | 5.8    | 6.5    |
| ▶ 10     | 12    | 32, 40, 50, 65, 80           | 1, 1½, 2, 2½, 3 |                 |                  | 31             | 15             | 0.18  | 0.18  | 0.22 | 0.33 | 0.57 | 0.90  | 1.5   | 2.4   | 4.1   | 6.7   | 8.9   | 10.8   | 12.8   |
| ▶ 16     | 20    | 40, 50, 65, 80               | 1½, 2, 2½, 3    |                 |                  | 38             | 15             | 0.28  | 0.44  | 0.58 | 0.95 | 1.3  | 1.9   | 2.8   | 4.3   | 7.2   | 10.0  | 13.0  | 15.8   | 18.3   |
| ▶ 25     | 30    | 50, 65, 80                   | 2, 2½, 3        |                 |                  | 48             | 15             | 0.47  | 0.80  | 1.1  | 1.8  | 2.3  | 3.4   | 5.9   | 9.6   | 13.8  | 17.9  | 22.1  | 25.7   | 29.2   |
| ▶ 36     | 42    | 65, 80                       | 2½, 3           |                 |                  | 63             | 15             | 0.36  | 0.91  | 1.2  | 1.9  | 3.0  | 4.7   | 7.8   | 12.3  | 17.7  | 24.3  | 30.8  | 36.0   | 40.0   |
| ▶ 40     | 47    | 80                           | 3               |                 |                  | 80             | 15             | 0.40  | 1.2   | 1.5  | 2.3  | 3.6  | 5.2   | 7.7   | 11.4  | 16.6  | 23.8  | 32.2  | 40.0   | 46.8   |
| ▶ 54     | 62    | 100, 125, 150, 200, 250      | 4, 6, 8, 10     |                 |                  | 63             | 30             | 0.54  | 0.96  | 1.1  | 1.6  | 3.1  | 4.9   | 8.2   | 14.8  | 23.8  | 34.7  | 46.3  | 54.6   | 59.4   |
| ▶ 63     | 75    | 100, 125, 150, 200, 250      | 4, 6, 8, 10     |                 |                  | 80             | 30             | 0.63  | 3.2   | 5.2  | 11.3 | 19.8 | 29.2  | 39.5  | 47.9  | 54.3  | 59.2  | 63.0  | 65.8   | 68.0   |
| ▶ 80     | 95    | 100, 125, 150, 200, 250      | 4, 6, 8, 10     |                 |                  | 80             | 30             | 0.80  | 1.3   | 1.3  | 2.6  | 4.1  | 8.7   | 20.6  | 36.9  | 51.8  | 64.8  | 76.3  | 86.0   | 92.7   |
| ▶ 100    | 120   | 100, 125, 150, 200, 250, 300 | 4, 6, 8, 10, 12 |                 |                  | 100            | 30             | 1.0   | 1.6   | 1.8  | 3.2  | 6.0  | 9.6   | 15.8  | 27.1  | 40.8  | 59.4  | 81.9  | 100.1  | 110.9  |
| ▶ 120    | 140   | 125                          | 4               |                 |                  | 110            | 30             | 1.2   | 1.9   | 2.3  | 5.1  | 9.2  | 15.0  | 23.7  | 35.1  | 52.0  | 73.1  | 98.0  | 118.4  | 133.3  |
| ▶ 160    | 190   | 150                          | 6               |                 |                  | 130            | 30             | 1.6   | 4.5   | 6.2  | 10.4 | 15.2 | 22.5  | 33.2  | 49.5  | 70.0  | 97.3  | 131.6 | 162.7  | 180.3  |
| ▶ 160    | 190   | 200, 250, 300                | 8, 10, 12       |                 |                  | 125            | 60             | 1.6   | 2.5   | 2.7  | 5.7  | 10.0 | 15.4  | 22.7  | 33.8  | 50.1  | 80.9  | 124.1 | 162.4  | 193.1  |
| ▶ 250    | 290   | 200, 250, 300                | 8, 10, 12       |                 |                  | 150            | 60             | 2.5   | 3.8   | 4.9  | 9.1  | 15.3 | 24.1  | 37.0  | 66.9  | 111.3 | 165.4 | 215.5 | 250.7  | 278.5  |
| ▶ 360    | 420   | 200, 250, 300                | 8, 10, 12       |                 |                  | 200            | 60             | 3.6   | 5.3   | 6.0  | 11.0 | 20.7 | 33.0  | 51.8  | 94.0  | 151.0 | 218.0 | 292.0 | 358.5  | 394.6  |
| ▶ 420    | 485   | 200, 250, 300                | 8, 10, 12       |                 |                  | 200            | 60             | 4.2   | 6.1   | 6.5  | 16.4 | 53.3 | 118.0 | 183.0 | 248.0 | 313.0 | 377.0 | 426.0 | 470.1  | 502.1  |
| ▶ 630    | 735   | 250, 300                     | 10, 12          |                 |                  | 250            | 120            | 6.3   | 6.5   | 8.8  | 18.4 | 33.7 | 55.2  | 86.6  | 131.0 | 232.0 | 369.0 | 522.0 | 668.5  | 701.0  |
| ▶ 1000   | 1150  | 300                          | 12              |                 |                  | 300            | 120            | 10.0  | 10.8  | 13.6 | 28.4 | 53.2 | 91.2  | 141.6 | 250.0 | 429.0 | 647.0 | 861.0 | 1020.8 | 1123.1 |

**Table 3241.12:**  $K_V$  coefficients ( $m^3/h$ ) for Type 3241 Globe Valve: Perforated plug without flow divider, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $K_{Vs}$ | $C_V$ | DN                           | NPS             | NR              | CH     | Seat Ø [mm] | Travel [mm] | Travel in % · Flow coefficient ( $K_V$ coefficient) |       |       |       |       |       |       |        |        |        |        |        |        |
|----------|-------|------------------------------|-----------------|-----------------|--------|-------------|-------------|---|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|
|          |       |                              |                 |                 |        |             |             | 0   | 5     | 10    | 20    | 30    | 40    | 50    | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 4      | 5     | 25, 32, 40, 50               | 1, 1½, 2        | Perforated plug | Linear | 24          | 15          | 0.040   | 0.25  | 0.42  | 0.78  | 1.2   | 1.6   | 2.1   | 2.6    | 3.2    | 3.8    | 4.5    | 5.4    | 6.3    |
| ▶ 6.3    | 7.5   | 25, 32, 40, 50, 65, 80       | 1, 1½, 2, 2½, 3 |                 |        | 24          | 15          | 0.073   | 0.43  | 0.73  | 1.3   | 2.0   | 2.6   | 3.2   | 3.8    | 4.5    | 5.2    | 5.8    | 6.5    | 7.2    |
| ▶ 10     | 12    | 32, 40, 50, 65, 80           | 1, 1½, 2, 2½, 3 |                 |        | 31          | 15          | 0.10  | 0.53  | 0.95  | 1.8   | 2.6   | 3.7   | 4.8   | 5.9    | 7.1    | 8.3    | 9.8    | 11.2   | 12.2   |
| ▶ 16     | 20    | 32, 40, 50, 65, 80           | 1, 1½, 2, 2½, 3 |                 |        | 31          | 15          | 0.28  | 1.5   | 2.6   | 4.7   | 6.8   | 8.9   | 10.8  | 12.3   | 13.5   | 14.5   | 15.2   | 15.7   | 16.0   |
| ▶ 25     | 30    | 40, 50, 65, 80               | 1½, 2, 2½, 3    |                 |        | 38          | 15          | 0.006   | 1.1   | 2.5   | 5.9   | 9.1   | 12.3  | 15.2  | 18.0   | 20.1   | 22.0   | 23.3   | 24.0   | 24.6   |
| ▶ 36     | 42    | 50, 65, 80                   | 2, 2½, 3        |                 |        | 48          | 15          | 0.64  | 1.1   | 2.6   | 6.6   | 10.3  | 14.1  | 17.8  | 21.7   | 25.4   | 29.0   | 31.9   | 34.0   | 36.0   |
| ▶ 47     | 55    | 65, 80                       | 2½, 3           |                 |        | 63          | 15          | 0.78  | 3.7   | 6.4   | 11.9  | 17.3  | 22.9  | 28.5  | 33.6   | 38.3   | 42.3   | 45.8   | 48.5   | 50.7   |
| ▶ 60     | 70    | 80                           | 3               |                 |        | 80          | 15          | 0.60  | 3.7   | 6.8   | 13.2  | 19.6  | 26.5  | 33.7  | 40.2   | 46.8   | 53.2   | 58.8   | 64.3   | 68.6   |
| ▶ 63     | 75    | 100, 125, 150, 200, 250      | 4, 6, 8, 10     |                 |        | 63          | 30          | 0.63  | 3.2   | 5.6   | 11.9  | 20.3  | 29.7  | 39.5  | 47.9   | 54.3   | 59.2   | 63.0   | 65.8   | 68.0   |
| ▶ 100    | 120   | 100, 125, 150, 200, 250      | 4, 6, 8, 10     |                 |        | 80          | 30          | 1.0   | 6.9   | 13.6  | 28.1  | 41.6  | 54.2  | 65.9  | 76.0   | 84.3   | 89.8   | 94.2   | 97.8   | 100.7  |
| ▶ 130    | 160   | 100, 125, 150, 200, 250, 300 | 4, 6, 8, 10, 12 |                 |        | 100         | 30          | 0.54  | 5.5   | 12.1  | 27.1  | 42.6  | 58.0  | 73.1  | 86.7   | 99.2   | 109.9  | 118.4  | 125.6  | 132.0  |
| ▶ 160    | 190   | 125                          | 4               |                 |        | 110         | 30          | 1.6   | 11.0  | 20.3  | 38.7  | 57.3  | 76.8  | 95.4  | 111.4  | 126.2  | 139.6  | 150.0  | 160.2  | 168.2  |
| ▶ 210    | 245   | 150                          | 6               |                 |        | 130         | 30          | 2.1   | 14.0  | 24.8  | 48.5  | 72.5  | 97.4  | 121.6 | 142.9  | 163.1  | 181.3  | 197.4  | 212.2  | 224.7  |
| ▶ 250    | 290   | 200, 250, 300                | 8, 10, 12       |                 |        | 125         | 60          | 2.4   | 13.0  | 25.9  | 57.6  | 91.2  | 127.7 | 160.7 | 191.8  | 218.4  | 239.6  | 256.3  | 268.3  | 277.1  |
| ▶ 320    | 375   | 200, 250, 300                | 8, 10, 12       |                 |        | 150         | 60          | 3.2   | 16.5  | 31.8  | 67.2  | 105.8 | 150.8 | 194.7 | 233.9  | 264.3  | 284.0  | 295.0  | 297.9  | 300.0  |
| ▶ 500    | 580   | 200, 250, 300                | 8, 10, 12       |                 |        | 200         | 60          | 7.5   | 18.0  | 43.0  | 108.3 | 170.1 | 234.4 | 296.3 | 349.4  | 397.0  | 439.1  | 473.6  | 499.7  | 520.0  |
| ▶ 900    | 1040  | 250, 300                     | 10, 12          |                 |        | 250         | 120         | 9.0   | 45.0  | 91.7  | 197.0 | 314.0 | 446.0 | 570.0 | 684.0  | 775.0  | 844.0  | 882.1  | 902.6  | 921.9  |
| ▶ 1300   | 1500  | 300                          | 12              |                 |        | 300         | 120         | 13.0  | 120.2 | 223.0 | 410.0 | 586.0 | 771.0 | 938.0 | 1083.0 | 1186.0 | 1270.0 | 1320.0 | 1352.2 | 1352.3 |

**Table 3241.13:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3241 Globe Valve: Perforated plug with flow divider St I, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                           | NPS             | NR                       | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $K_v$ coefficient) |       |      |      |      |       |       |       |       |       |       |       |       |
|----------|-------|------------------------------|-----------------|--------------------------|------------------|----------------|----------------|---|-------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|
|          |       |                              |                 |                          |                  |                |                | 0   | 5     | 10   | 20   | 30   | 40    | 50    | 60    | 70    | 80    | 90    | 100   | 110   |
| ▶ 3.6    | 4.2   | 32, 40, 50                   | 1, 1½, 2        | Perforated plug and St I | Equal percentage | 24             | 15             | 0.028   | 0.075 | 0.12 | 0.18 | 0.26 | 0.39  | 0.58  | 0.86  | 1.2   | 1.8   | 2.6   | 3.9   | 5.1   |
| ▶ 5.7    | 7     | 32, 40, 50                   | 1, 1½, 2        |                          |                  | 24             | 15             | 0.063   | 0.15  | 0.19 | 0.28 | 0.44 | 0.62  | 0.92  | 1.5   | 2.2   | 3.1   | 4.3   | 5.5   | 6.1   |
| ▶ 9      | 10.5  | 32, 40, 50                   | 1, 1½, 2        |                          |                  | 31             | 15             | 0.18  | 0.18  | 0.22 | 0.33 | 0.57 | 0.90  | 1.5   | 2.4   | 4.0   | 6.7   | 8.7   | 10.6  | 12.5  |
| ▶ 14.5   | 17    | 40, 50, 65, 80               | 1½, 2, 2½, 3    |                          |                  | 38             | 15             | 0.28  | 0.44  | 0.58 | 0.95 | 1.3  | 1.9   | 2.8   | 4.3   | 7.1   | 9.7   | 12.5  | 15.0  | 17.3  |
| ▶ 22     | 26    | 50, 65, 80                   | 2, 2½, 3        |                          |                  | 48             | 15             | 0.47  | 0.80  | 1.1  | 1.8  | 2.3  | 3.4   | 5.9   | 9.6   | 13.3  | 16.7  | 20.1  | 22.6  | 25.4  |
| ▶ 32     | 37    | 65, 80                       | 2½, 3           |                          |                  | 63             | 15             | 0.36  | 0.91  | 1.2  | 1.7  | 2.7  | 4.2   | 7.1   | 11.2  | 16.1  | 22.1  | 28.0  | 32.8  | 36.4  |
| ▶ 36     | 42    | 80                           | 3               |                          |                  | 80             | 15             | 0.40  | 1.2   | 1.5  | 2.3  | 3.6  | 5.2   | 7.7   | 11.4  | 16.2  | 22.6  | 30.0  | 36.4  | 42.2  |
| ▶ 47     | 55    | 100, 125, 150, 200, 250      | 4, 6, 8, 10     |                          |                  | 63             | 30             | 0.54  | 0.96  | 1.1  | 1.6  | 3.1  | 4.9   | 8.2   | 14.8  | 23.2  | 33.0  | 43.2  | 49.6  | 53.5  |
| ▶ 57     | 67    | 100, 125, 150, 200, 250      | 4, 6, 8, 10     |                          |                  | 80             | 30             | 0.63  | 1.1   | 1.5  | 2.6  | 4.1  | 6.0   | 8.9   | 15.1  | 23.8  | 36.3  | 48.3  | 58.1  | 65.0  |
| ▶ 72     | 85    | 100, 125, 150, 200, 250      | 4, 6, 8, 10     |                          |                  | 80             | 30             | 0.80  | 1.3   | 1.3  | 2.6  | 4.1  | 8.7   | 20.6  | 36.9  | 50.2  | 61.2  | 70.6  | 77.4  | 82.5  |
| ▶ 90     | 105   | 100, 125, 150, 200, 250, 300 | 4, 6, 8, 10, 12 |                          |                  | 100            | 30             | 1.0   | 1.6   | 1.8  | 3.2  | 6.0  | 9.6   | 15.8  | 27.1  | 39.3  | 55.5  | 74.5  | 88.1  | 96.2  |
| ▶ 100    | 120   | 125                          | 4               |                          |                  | 110            | 30             | 1.2   | 1.9   | 2.3  | 5.1  | 9.2  | 15.0  | 23.7  | 35.1  | 50.4  | 69.1  | 90.7  | 106.5 | 118.6 |
| ▶ 144    | 170   | 150                          | 6               |                          |                  | 130            | 30             | 1.6   | 4.5   | 6.2  | 10.4 | 15.2 | 22.5  | 33.2  | 49.5  | 67.9  | 91.9  | 121.7 | 146.5 | 160.4 |
| ▶ 144    | 170   | 200, 250, 300                | 8, 10, 12       |                          |                  | 125            | 60             | 1.6   | 2.5   | 2.7  | 5.7  | 10.0 | 15.4  | 22.7  | 33.8  | 48.6  | 76.5  | 114.8 | 146.1 | 171.9 |
| ▶ 225    | 265   | 200, 250, 300                | 8, 10, 12       |                          |                  | 150            | 60             | 2.5   | 3.8   | 4.9  | 9.1  | 15.3 | 24.1  | 37.0  | 66.9  | 108.6 | 158.1 | 202.6 | 230.6 | 254.0 |
| ▶ 320    | 375   | 200, 250, 300                | 8, 10, 12       |                          |                  | 200            | 60             | 3.6   | 5.3   | 6.0  | 11.0 | 20.7 | 33.0  | 51.8  | 94.0  | 147.1 | 207.8 | 273.4 | 328.1 | 357.7 |
| ▶ 375    | 435   | 200, 250, 300                | 8, 10, 12       |                          |                  | 200            | 60             | 4.2   | 6.1   | 6.5  | 16.4 | 53.3 | 118.0 | 183.0 | 248.0 | 305.0 | 359.4 | 398.8 | 430.2 | 455.1 |
| ▶ 560    | 650   | 250, 300                     | 10, 12          |                          |                  | 250            | 120            | 6.3   | 6.5   | 8.8  | 18.4 | 33.7 | 55.2  | 86.6  | 131.0 | 225.7 | 350.7 | 486.8 | 608.3 | 631.6 |
| ▶ 900    | 1040  | 300                          | 12              |                          |                  | 300            | 120            | 10.0  | 10.8  | 13.6 | 28.4 | 53.2 | 91.2  | 141.6 | 250.0 | 415.5 | 609.6 | 793.2 | 913.6 | 993.4 |



**Table 3241.14:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3241 Globe Valve: Perforated plug with flow divider St I, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                           | NPS             | NR                       | CH     | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % - Flow coefficient ( $K_v$ coefficient) |       |       |       |       |       |       |       |        |        |        |        |        |
|----------|-------|------------------------------|-----------------|--------------------------|--------|----------------|----------------|---|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|
|          |       |                              |                 |                          |        |                |                | 0   | 5     | 10    | 20    | 30    | 40    | 50    | 60    | 70     | 80     | 90     | 100    | 110    |
| ▶ 3.6    | 4.2   | 32, 40, 50                   | 1, 1½, 2        | Perforated plug and St I | Linear | 24             | 15             | 0.040   | 0.25  | 0.40  | 0.75  | 1.1   | 1.6   | 2.0   | 2.5   | 3.0    | 3.6    | 4.3    | 5.2    | 6.0    |
| ▶ 5.7    | 7     | 32, 40, 50                   | 1, 1½, 2        |                          |        | 24             | 15             | 0.073   | 0.43  | 0.73  | 1.3   | 1.9   | 2.6   | 3.2   | 3.8   | 4.4    | 5.1    | 5.8    | 6.4    | 7.1    |
| ▶ 9      | 10.5  | 32, 40, 50                   | 1, 1½, 2        |                          |        | 31             | 15             | 0.10  | 0.53  | 0.94  | 1.7   | 2.6   | 3.6   | 4.7   | 5.9   | 7.1    | 8.3    | 9.7    | 11.1   | 12.0   |
| ▶ 14.5   | 17    | 32, 40, 50                   | 1, 1½, 2        |                          |        | 31             | 15             | 0.28  | 1.50  | 2.5   | 4.4   | 6.3   | 8.2   | 10.0  | 11.5  | 12.6   | 13.5   | 14.1   | 14.6   | 14.9   |
| ▶ 22     | 26    | 40, 50, 65, 80               | 1½, 2, 2½, 3    |                          |        | 38             | 15             | 0.006   | 1.1   | 2.4   | 5.5   | 8.5   | 11.5  | 14.1  | 16.7  | 18.7   | 20.4   | 21.7   | 22.3   | 22.9   |
| ▶ 32     | 37    | 50, 65, 80                   | 2, 2½, 3        |                          |        | 48             | 15             | 0.64  | 1.1   | 2.5   | 6.2   | 9.7   | 13.3  | 16.8  | 20.4  | 23.9   | 27.3   | 30.0   | 32.0   | 33.8   |
| ▶ 43     | 50    | 65, 80                       | 2½, 3           |                          |        | 63             | 15             | 0.78  | 3.7   | 6.2   | 11.2  | 16.2  | 21.5  | 26.8  | 31.6  | 36.0   | 39.8   | 43.0   | 45.6   | 47.7   |
| ▶ 54     | 62    | 80                           | 3               |                          |        | 80             | 15             | 0.60  | 3.7   | 6.3   | 11.5  | 17.1  | 23.1  | 29.3  | 35.0  | 40.7   | 46.3   | 51.2   | 55.9   | 59.7   |
| ▶ 57     | 67    | 100, 125, 150, 200, 250      | 4, 6, 8, 10     |                          |        | 63             | 30             | 0.63  | 3.2   | 5.4   | 11.2  | 19.1  | 27.9  | 37.1  | 45.0  | 51.1   | 55.7   | 59.2   | 61.9   | 64.0   |
| ▶ 90     | 105   | 100, 125, 150, 200, 250      | 4, 6, 8, 10     |                          |        | 80             | 30             | 1.0   | 6.9   | 12.6  | 24.7  | 36.6  | 47.7  | 58.0  | 66.9  | 74.1   | 79.0   | 82.9   | 86.1   | 88.6   |
| ▶ 115    | 135   | 100, 125, 150, 200, 250, 300 | 4, 6, 8, 10, 12 |                          |        | 100            | 30             | 0.54  | 5.5   | 11.2  | 23.8  | 37.5  | 51.0  | 64.3  | 76.3  | 87.3   | 96.7   | 104.2  | 110.5  | 116.2  |
| ▶ 144    | 170   | 125                          | 4               |                          |        | 110            | 30             | 1.6   | 11.0  | 18.8  | 34.1  | 50.4  | 67.6  | 83.9  | 98.0  | 111.1  | 122.8  | 132.0  | 141.0  | 148.0  |
| ▶ 190    | 220   | 150                          | 6               |                          |        | 130            | 30             | 2.1   | 14.0  | 23.0  | 42.7  | 63.8  | 85.8  | 107.0 | 125.7 | 143.5  | 159.6  | 173.7  | 186.8  | 197.7  |
| ▶ 225    | 265   | 200, 250, 300                | 8, 10, 12       |                          |        | 125            | 60             | 2.4   | 13.0  | 24.7  | 53.0  | 83.9  | 117.5 | 147.8 | 176.5 | 200.9  | 220.4  | 235.8  | 246.8  | 254.9  |
| ▶ 280    | 325   | 200, 250, 300                | 8, 10, 12       |                          |        | 150            | 60             | 3.2   | 16.5  | 29.7  | 59.8  | 94.2  | 134.2 | 173.3 | 208.2 | 235.2  | 252.8  | 262.5  | 265.1  | 267.0  |
| ▶ 450    | 520   | 200, 250, 300                | 8, 10, 12       |                          |        | 200            | 60             | 7.5   | 18.0  | 40.7  | 98.6  | 154.8 | 213.3 | 269.6 | 318.0 | 361.3  | 399.6  | 431.0  | 454.7  | 473.2  |
| ▶ 800    | 950   | 250, 300                     | 10, 12          |                          |        | 250            | 120            | 9.0   | 45.0  | 86.2  | 177.3 | 282.6 | 401.4 | 513.0 | 615.6 | 697.5  | 759.6  | 793.9  | 812.3  | 829.7  |
| ▶ 1150   | 1350  | 300                          | 12              |                          |        | 300            | 120            | 13.0  | 120.2 | 209.6 | 369.0 | 527.4 | 693.9 | 844.2 | 974.7 | 1067.4 | 1143.0 | 1188.0 | 1217.0 | 1217.1 |

**Table 3241.15:**  $K_V$  coefficients ( $m^3/h$ ) for Type 3241 Globe Valve: Perforated plug with flow divider St II, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{Vs}$ | $C_V$ | DN                           | NPS             | NR                        | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $K_V$ coefficient) |       |      |      |      |       |       |       |       |       |       |       |       |
|----------|-------|------------------------------|-----------------|---------------------------|------------------|----------------|----------------|---|-------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|
|          |       |                              |                 |                           |                  |                |                | 0   | 5     | 10   | 20   | 30   | 40    | 50    | 60    | 70    | 80    | 90    | 100   | 110   |
| ▶ 8      | 9.5   | 32, 40, 50                   | 1, 1½, 2        | Perforated plug and St II | Equal percentage | 31             | 15             | 0.18  | 0.18  | 0.22 | 0.33 | 0.57 | 0.90  | 1.5   | 2.4   | 4.0   | 6.6   | 8.7   | 10.5  | 12.3  |
| ▶ 13     | 15    | 40, 50, 65, 80               | 1½, 2, 2½, 3    |                           |                  | 38             | 15             | 0.28  | 0.44  | 0.58 | 0.95 | 1.3  | 1.9   | 2.8   | 4.3   | 7.1   | 9.7   | 12.4  | 14.8  | 17.1  |
| ▶ 20     | 23    | 50, 65, 80                   | 2, 2½, 3        |                           |                  | 48             | 15             | 0.47  | 0.80  | 1.1  | 1.8  | 2.3  | 3.4   | 5.9   | 9.5   | 13.4  | 16.4  | 19.5  | 21.6  | 23.9  |
| ▶ 29     | 34    | 65, 80                       | 2½, 3           |                           |                  | 63             | 15             | 0.36  | 0.91  | 1.1  | 1.6  | 2.6  | 4.1   | 6.9   | 10.8  | 15.6  | 21.4  | 27.1  | 31.7  | 35.2  |
| ▶ 43     | 50    | 100, 125, 150, 200, 250      | 4, 6, 8, 10     |                           |                  | 63             | 30             | 0.54  | 0.961 | 1.1  | 1.6  | 3.1  | 4.9   | 8.2   | 14.8  | 22.9  | 32.4  | 42.1  | 48.0  | 51.6  |
| ▶ 50     | 60    | 100, 125, 150, 200, 250      | 4, 6, 8, 10     |                           |                  | 80             | 15             | 0.63  | 1.1   | 1.5  | 2.6  | 4.1  | 6.0   | 8.9   | 15.1  | 23.4  | 35.2  | 46.3  | 54.8  | 60.9  |
| ▶ 63     | 75    | 100, 125, 150, 200, 250      | 4, 6, 8, 10     |                           |                  | 80             | 30             | 0.80  | 1.3   | 1.3  | 2.6  | 4.1  | 8.7   | 20.6  | 36.9  | 49.6  | 59.8  | 68.3  | 73.9  | 78.4  |
| ▶ 80     | 95    | 100, 125, 150, 200, 250, 300 | 4, 6, 8, 10, 12 |                           |                  | 100            | 30             | 1.0   | 1.6   | 1.8  | 3.2  | 6.0  | 9.6   | 15.8  | 26.6  | 39.3  | 54.1  | 70.8  | 82.1  | 87.9  |
| ▶ 95     | 110   | 125                          | 4               |                           |                  | 110            | 30             | 1.2   | 1.9   | 2.3  | 5.1  | 9.2  | 15.0  | 23.7  | 34.5  | 50.1  | 66.5  | 84.8  | 97.0  | 105.7 |
| ▶ 125    | 145   | 150                          | 6               |                           |                  | 130            | 30             | 1.6   | 4.5   | 6.2  | 10.4 | 15.2 | 22.5  | 33.2  | 48.6  | 67.5  | 88.5  | 113.8 | 133.4 | 142.9 |
| ▶ 125    | 145   | 200, 250, 300                | 8, 10, 12       |                           |                  | 125            | 60             | 1.6   | 2.5   | 2.7  | 5.7  | 10.0 | 15.4  | 22.7  | 33.2  | 48.3  | 73.6  | 107.3 | 133.1 | 153.1 |
| ▶ 200    | 235   | 200, 250, 300                | 8, 10, 12       |                           |                  | 150            | 60             | 2.5   | 3.8   | 4.9  | 9.1  | 15.3 | 24.1  | 37.0  | 65.8  | 107.7 | 152.2 | 189.6 | 210.6 | 227.2 |
| ▶ 290    | 335   | 200, 250, 300                | 8, 10, 12       |                           |                  | 200            | 60             | 3.6   | 5.3   | 6.0  | 11.0 | 20.7 | 33.0  | 51.8  | 92.4  | 145.9 | 199.5 | 254.8 | 297.6 | 317.5 |
| ▶ 340    | 390   | 200, 250, 300                | 8, 10, 12       |                           |                  | 200            | 60             | 4.2   | 6.1   | 6.5  | 16.4 | 53.3 | 118.0 | 183.0 | 243.8 | 302.4 | 345.0 | 371.7 | 390.2 | 403.9 |
| ▶ 500    | 580   | 250, 300                     | 10, 12          |                           |                  | 250            | 120            | 6.3   | 6.5   | 8.8  | 18.4 | 33.7 | 55.2  | 86.6  | 131.0 | 221.9 | 339.6 | 465.2 | 571.6 | 589.2 |
| ▶ 800    | 950   | 300                          | 12              |                           |                  | 300            | 120            | 10.0  | 10.8  | 13.6 | 28.4 | 53.2 | 91.2  | 141.6 | 246.3 | 416.1 | 598.5 | 764.1 | 867.7 | 929.4 |

**Table 3241.16:**  $K_V$  coefficients ( $m^3/h$ ) for Type 3241 Globe Valve: Perforated plug with flow divider St II, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $K_{Vs}$ | $C_V$ | DN                           | NPS             | NR                        | CH     | Seat Ø [mm] | Travel [mm] | Travel in % · Flow coefficient ( $K_V$ coefficient) |       |       |       |       |       |       |       |       |        |        |        |        |
|----------|-------|------------------------------|-----------------|---------------------------|--------|-------------|-------------|---|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|
|          |       |                              |                 |                           |        |             |             | 0   | 5     | 10    | 20    | 30    | 40    | 50    | 60    | 70    | 80     | 90     | 100    | 110    |
| ▶ 8      | 9.5   | 32, 40, 50                   | 1, 1½, 2        | Perforated plug and St II | Linear | 31          | 15          | 0.10  | 0.53  | 0.94  | 1.7   | 2.6   | 3.6   | 4.7   | 5.8   | 7.0   | 8.2    | 9.6    | 11.0   | 11.9   |
| ▶ 13     | 15    | 32, 40, 50                   | 1, 1½, 2        |                           |        | 31          | 15          | 0.28  | 1.5   | 2.5   | 4.3   | 6.2   | 8.1   | 9.8   | 11.2  | 12.3  | 13.2   | 13.8   | 14.3   | 14.5   |
| ▶ 20     | 23    | 40, 50, 65, 80               | 1½, 2, 2½, 3    |                           |        | 38          | 15          | 0.006   | 1.1   | 2.4   | 5.4   | 8.4   | 11.4  | 14.0  | 16.5  | 18.5  | 20.2   | 21.5   | 22.1   | 22.6   |
| ▶ 29     | 34    | 50, 65, 80                   | 2, 2½, 3        |                           |        | 48          | 15          | 0.64  | 1.1   | 2.5   | 6.1   | 9.6   | 13.2  | 16.6  | 20.2  | 23.6  | 27.0   | 29.7   | 31.7   | 33.5   |
| ▶ 38     | 45    | 65, 80                       | 2½, 3           |                           |        | 63          | 15          | 0.78  | 3.7   | 6.1   | 11.1  | 16.0  | 21.3  | 26.5  | 31.3  | 35.6  | 39.4   | 42.5   | 45.1   | 47.2   |
| ▶ 50     | 60    | 100, 125, 150, 200, 250      | 4, 6, 8, 10     |                           |        | 63          | 30          | 0.63  | 3.2   | 5.4   | 11.1  | 18.9  | 27.6  | 36.8  | 44.5  | 50.5  | 55.1   | 58.6   | 61.2   | 63.3   |
| ▶ 80     | 95    | 100, 125, 150, 200, 250      | 4, 6, 8, 10     |                           |        | 80          | 30          | 1.0   | 6.9   | 12.3  | 23.6  | 34.9  | 45.5  | 55.4  | 63.8  | 70.8  | 75.4   | 79.2   | 82.1   | 84.6   |
| ▶ 105    | 120   | 100, 125, 150, 200, 150, 300 | 4, 6, 8, 10, 12 |                           |        | 100         | 30          | 0.54  | 5.5   | 11.0  | 22.8  | 35.8  | 48.7  | 61.4  | 72.8  | 83.3  | 92.3   | 99.5   | 105.5  | 110.9  |
| ▶ 125    | 145   | 125                          | 4               |                           |        | 110         | 30          | 1.6   | 11.0  | 18.4  | 32.5  | 48.1  | 64.5  | 80.1  | 93.6  | 106.0 | 117.3  | 126.0  | 134.6  | 141.3  |
| ▶ 170    | 200   | 150                          | 6               |                           |        | 130         | 30          | 2.1   | 14.0  | 22.1  | 39.8  | 59.4  | 79.9  | 99.7  | 117.2 | 133.8 | 148.7  | 161.8  | 174.0  | 184.2  |
| ▶ 200    | 235   | 200, 250, 300                | 8, 10, 12       |                           |        | 125         | 60          | 2.4   | 13.0  | 23.4  | 48.4  | 76.6  | 107.3 | 135.0 | 161.1 | 183.5 | 201.3  | 215.3  | 225.4  | 232.8  |
| ▶ 255    | 295   | 200, 250, 300                | 8, 10, 12       |                           |        | 150         | 60          | 3.2   | 16.5  | 28.3  | 55.1  | 86.8  | 123.7 | 159.7 | 191.8 | 216.7 | 232.9  | 241.9  | 244.3  | 246.0  |
| ▶ 400    | 465   | 200, 250, 300                | 8, 10, 12       |                           |        | 200         | 60          | 7.5   | 18.0  | 39.4  | 93.1  | 146.3 | 201.6 | 254.8 | 300.5 | 341.4 | 377.6  | 407.3  | 429.8  | 447.2  |
| ▶ 720    | 835   | 250, 300                     | 10, 12          |                           |        | 250         | 120         | 9.0   | 45.0  | 84.0  | 169.4 | 270.0 | 383.6 | 490.2 | 588.2 | 666.5 | 725.8  | 758.6  | 776.2  | 792.8  |
| ▶ 1040   | 1200  | 300                          | 12              |                           |        | 300         | 120         | 13.0  | 120.2 | 198.9 | 336.2 | 480.5 | 632.2 | 769.2 | 888.1 | 972.5 | 1041.4 | 1082.4 | 1108.8 | 1108.9 |

**Table 3241.17:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3241 Globe Valve: Perforated plug with flow divider St III, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                      | NPS             | NR                         | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $K_v$ coefficient) |      |      |      |      |       |       |       |       |       |       |       |       |
|----------|-------|-------------------------|-----------------|----------------------------|------------------|----------------|----------------|---|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|
|          |       |                         |                 |                            |                  |                |                | 0   | 5    | 10   | 20   | 30   | 40    | 50    | 60    | 70    | 80    | 90    | 100   | 110   |
| ▶ 4.8    | 5.6   | 32, 40, 50, 65, 80      | 1, 1½, 2, 2½, 3 | Perforated plug and St III | Equal percentage | 24             | 15             | 0.063   | 0.15 | 0.19 | 0.28 | 0.44 | 0.62  | 0.92  | 1.5   | 2.2   | 3.1   | 4.3   | 5.5   | 6.1   |
| ▶ 7.5    | 9     | 65, 80                  | 2½, 3           |                            |                  | 31             | 15             | 0.18  | 0.18 | 0.22 | 0.33 | 0.57 | 0.90  | 1.5   | 2.4   | 4.0   | 6.6   | 8.5   | 10.2  | 12.0  |
| ▶ 12     | 14    | 65, 80                  | 2½, 3           |                            |                  | 38             | 15             | 0.28  | 0.44 | 0.58 | 0.95 | 1.3  | 1.9   | 2.8   | 4.3   | 7.0   | 9.6   | 12.2  | 14.5  | 16.7  |
| ▶ 20     | 23    | 65, 80                  | 2½, 3           |                            |                  | 48             | 15             | 0.47  | 0.80 | 1.1  | 1.8  | 2.3  | 3.4   | 5.9   | 9.5   | 13.3  | 16.2  | 19.1  | 21.0  | 23.2  |
| ▶ 40     | 47    | 100, 125, 150, 200, 250 | 4, 6, 8, 10     |                            |                  | 63             | 30             | 0.54  | 0.96 | 1.1  | 1.6  | 3.1  | 4.9   | 8.2   | 14.8  | 22.8  | 32.0  | 41.4  | 46.9  | 50.3  |
| ▶ 47     | 55    | 125, 150, 200, 250      | 4, 6, 8, 10     |                            |                  | 80             | 30             | 0.63  | 1.1  | 1.5  | 2.6  | 4.1  | 6.0   | 8.9   | 14.9  | 23.7  | 35.1  | 45.6  | 53.5  | 58.7  |
| ▶ 60     | 70    | 125, 150, 200, 250      | 4, 6, 8, 10     |                            |                  | 80             | 30             | 0.80  | 1.3  | 1.3  | 2.6  | 4.1  | 8.7   | 20.6  | 36.3  | 50.1  | 59.5  | 66.9  | 71.8  | 75.1  |
| ▶ 75     | 90    | 150, 200, 250, 300      | 6, 8, 10, 12    |                            |                  | 100            | 30             | 1.0   | 1.6  | 1.8  | 3.2  | 6.0  | 9.6   | 15.8  | 26.6  | 39.2  | 53.5  | 69.6  | 80.1  | 85.4  |
| ▶ 120    | 140   | 200, 250, 300           | 8, 10, 12       |                            |                  | 125            | 60             | 1.6   | 4.5  | 6.2  | 10.4 | 15.2 | 22.5  | 33.2  | 48.5  | 67.1  | 87.1  | 110.9 | 128.6 | 136.7 |
| ▶ 190    | 220   | 200, 250, 300           | 8, 10, 12       |                            |                  | 150            | 60             | 2.5   | 3.8  | 4.9  | 9.1  | 15.3 | 24.1  | 37.0  | 65.7  | 107.3 | 150.5 | 186.4 | 205.5 | 220.8 |
| ▶ 270    | 315   | 250, 300                | 10, 12          |                            |                  | 200            | 60             | 3.6   | 5.3  | 6.0  | 11.0 | 20.7 | 33.0  | 51.8  | 92.0  | 144.5 | 194.6 | 244.9 | 281.4 | 297.0 |
| ▶ 315    | 365   | 250, 300                | 10, 12          |                            |                  | 200            | 60             | 4.2   | 6.1  | 6.5  | 16.4 | 53.3 | 118.0 | 183.0 | 242.7 | 299.5 | 336.5 | 357.3 | 369.0 | 377.9 |
| ▶ 480    | 560   | 300                     | 12              |                            |                  | 250            | 120            | 6.3   | 6.5  | 8.8  | 18.4 | 33.7 | 55.2  | 86.6  | 129.0 | 224.8 | 340.4 | 461.3 | 564.9 | 576.0 |

**Table 3241.18:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3241 Globe Valve: Perforated plug with flow divider St III, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                      | NPS             | NR                         | CH     | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % - Flow coefficient ( $K_v$ coefficient) |      |      |       |       |       |       |       |       |       |       |       |       |
|----------|-------|-------------------------|-----------------|----------------------------|--------|----------------|----------------|---|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|          |       |                         |                 |                            |        |                |                | 0   | 5    | 10   | 20    | 30    | 40    | 50    | 60    | 70    | 80    | 90    | 100   | 110   |
| ▶ 4.8    | 5.6   | 32, 40, 50, 65, 80      | 1, 1½, 2, 2½, 3 | Perforated plug and St III | Linear | 24             | 15             | 0.073   | 0.43 | 0.72 | 1.3   | 1.9   | 2.5   | 3.1   | 3.7   | 4.4   | 5.0   | 5.7   | 6.3   | 7.0   |
| ▶ 7.5    | 9     | 65, 80                  | 2½, 3           |                            |        | 31             | 15             | 0.10  | 0.53 | 0.93 | 1.7   | 2.6   | 3.5   | 4.7   | 5.8   | 6.9   | 8.1   | 9.5   | 10.9  | 11.8  |
| ▶ 12     | 14    | 65, 80                  | 2½, 3           |                            |        | 31             | 15             | 0.28  | 1.5  | 2.5  | 4.3   | 6.2   | 8.1   | 9.8   | 11.2  | 12.3  | 13.2  | 13.8  | 14.3  | 14.5  |
| ▶ 20     | 23    | 65, 80                  | 2½, 3           |                            |        | 38             | 15             | 0.006   | 1.1  | 2.4  | 5.4   | 8.3   | 11.2  | 13.8  | 16.3  | 18.3  | 20.0  | 21.2  | 21.8  | 22.4  |
| ▶ 27     | 31    | 65, 80                  | 2½, 3           |                            |        | 48             | 15             | 0.64  | 1.1  | 2.5  | 6.0   | 9.4   | 13.0  | 16.4  | 20.0  | 23.4  | 26.7  | 29.4  | 31.3  | 33.1  |
| ▶ 47     | 55    | 100, 125, 150, 200, 250 | 4, 6, 8, 10     |                            |        | 63             | 30             | 0.63  | 3.2  | 5.3  | 10.9  | 18.7  | 27.3  | 36.4  | 44.0  | 50.0  | 54.5  | 57.9  | 60.5  | 62.6  |
| ▶ 75     | 90    | 125, 150, 200, 250      | 6, 8, 10        |                            |        | 80             | 30             | 1.0   | 6.9  | 12.1 | 23.0  | 34.1  | 44.4  | 54.0  | 62.3  | 69.1  | 73.6  | 77.3  | 80.2  | 82.5  |
| ▶ 80     | 100   | 150, 200, 250, 300      | 6, 8, 10, 12    |                            |        | 100            | 30             | 0.5   | 5.5  | 10.8 | 22.2  | 34.9  | 47.5  | 59.9  | 71.1  | 81.3  | 90.1  | 97.1  | 103.0 | 108.2 |
| ▶ 190    | 220   | 200, 250, 300           | 8, 10, 12       |                            |        | 125            | 60             | 2.4   | 13.0 | 23.1 | 47.2  | 74.8  | 104.7 | 131.8 | 157.3 | 179.1 | 196.5 | 210.2 | 220.0 | 227.2 |
| ▶ 230    | 270   | 200, 250, 300           | 8, 10, 12       |                            |        | 150            | 60             | 3.2   | 16.5 | 27.8 | 53.1  | 83.6  | 119.1 | 153.8 | 184.8 | 208.8 | 224.4 | 233.1 | 235.3 | 237.0 |
| ▶ 375    | 435   | 250, 300                | 10, 12          |                            |        | 200            | 60             | 7.5   | 18.0 | 39.1 | 92.1  | 144.6 | 199.3 | 251.9 | 297.0 | 337.5 | 373.2 | 402.6 | 424.8 | 442.0 |
| ▶ 675    | 780   | 300                     | 12              |                            |        | 250            | 120            | 9.0   | 45.0 | 83.4 | 167.5 | 266.9 | 379.1 | 484.5 | 581.4 | 658.8 | 717.4 | 749.8 | 767.2 | 783.6 |

**Table 3241.19:**  $K_V$  coefficients ( $m^3/h$ ) for Type 3241 Globe Valve: without trim, with cast body

| Seat Ø<br>[mm] | Flow coefficient $K_V$ without trim |       |       |       |       |       |       |       |        |        |        |        |        |        |
|----------------|-------------------------------------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|
|                | DN 15                               | DN 20 | DN 25 | DN 32 | DN 40 | DN 50 | DN 65 | DN 80 | DN 100 | DN 125 | DN 150 | DN 200 | DN 250 | DN 300 |
| 3              | 0.34                                | 0.34  | 0.34  | –     | –     | –     | –     | –     | –      | –      | –      | –      | –      | –      |
| 6              | 1.25                                | 1.25  | 1.3   | 1.3   | 1.35  | 1.35  | –     | –     | –      | –      | –      | –      | –      | –      |
| 12             | 4.4                                 | 4.5   | 4.6   | 4.6   | 4.7   | 4.8   | –     | –     | –      | –      | –      | –      | –      | –      |
| 24             | –                                   | 8.6   | 13    | 16.9  | 20    | 21.5  | –     | –     | –      | –      | –      | –      | –      | –      |
| 31             | –                                   | –     | –     | 20.5  | 29    | 32    | –     | –     | –      | –      | –      | –      | –      | –      |
| 38             | –                                   | –     | –     | –     | 33    | 46    | 49    | 54    | –      | –      | –      | –      | –      | –      |
| 48             | –                                   | –     | –     | –     | –     | 50    | 72    | 81    | –      | –      | –      | –      | –      | –      |
| 63             | –                                   | –     | –     | –     | –     | –     | 84    | 96    | 127    | 133    | 136    | –      | –      | –      |
| 80             | –                                   | –     | –     | –     | –     | –     | –     | 125   | 165    | 204    | 213    | –      | –      | –      |
| 100            | –                                   | –     | –     | –     | –     | –     | –     | –     | 187    | 271    | 311    | –      | –      | –      |
| 110            | –                                   | –     | –     | –     | –     | –     | –     | –     | –      | 289    | –      | –      | –      | –      |
| 125            | –                                   | –     | –     | –     | –     | –     | –     | –     | –      | –      | –      | 500    | 506    | 512    |
| 130            | –                                   | –     | –     | –     | –     | –     | –     | –     | –      | –      | 416    | –      | –      | –      |
| 150            | –                                   | –     | –     | –     | –     | –     | –     | –     | –      | –      | –      | 654    | 703    | 716    |
| 200            | –                                   | –     | –     | –     | –     | –     | –     | –     | –      | –      | –      | 700    | 1040   | 1200   |
| 250            | –                                   | –     | –     | –     | –     | –     | –     | –     | –      | –      | –      | –      | 1150   | 1550   |
| 300            | –                                   | –     | –     | –     | –     | –     | –     | –     | –      | –      | –      | –      | –      | 1670   |

**Table 3241.20:**  $K_V$  coefficients ( $m^3/h$ ) for Type 3241 Globe Valve: without trim, with forged body

| Seat Ø<br>[mm] | Flow coefficient $K_V$ without trim |       |       |       |       |       |       |       |
|----------------|-------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                | DN 15                               | DN 20 | DN 25 | DN 32 | DN 40 | DN 50 | DN 65 | DN 80 |
| 3              | 0.34                                | 0.34  | 0.34  | –     | –     | –     | –     | –     |
| 6              | 1.25                                | 1.25  | 1.3   | 1.3   | 1.35  | 1.35  | –     | –     |
| 12             | 4.4                                 | 4.5   | 4.6   | 4.6   | 4.7   | 4.8   | –     | –     |
| 24             | –                                   | 8.4   | 12.9  | 14.5  | 16.1  | 17.7  | –     | –     |
| 31             | –                                   | –     | –     | 19.1  | 27    | 29    | –     | –     |
| 38             | –                                   | –     | –     | –     | 32    | 42    | 43    | 44    |
| 48             | –                                   | –     | –     | –     | –     | 48    | 58    | 63    |
| 63             | –                                   | –     | –     | –     | –     | –     | 82    | 95    |
| 80             | –                                   | –     | –     | –     | –     | –     | –     | 105   |

**Table 3241.21:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: Standard plug without flow divider, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS            | DN                     | NR      | CH               | Seat Ø [mm] | Travel [mm] | Travel in % · Flow coefficient ( $C_v$ coefficient) |        |        |        |        |        |        |        |        |        |        |        |       |
|--------|----------|----------------|------------------------|---------|------------------|-------------|-------------|---|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------|
|        |          |                |                        |         |                  |             |             | 0   | 5      | 10     | 20     | 30     | 40     | 50     | 60     | 70     | 80     | 90     | 100    | 110   |
| ▶ 0.12 | 0.1      | ½, ¾, 1        | 15, 20, 25             | Without | Equal percentage | 3           | 15          | 0.0020  | 0.0027 | 0.0035 | 0.0050 | 0.0070 | 0.0097 | 0.0150 | 0.0222 | 0.0311 | 0.0483 | 0.0744 | 0.1139 | 0.173 |
| ▶ 0.2  | 0.16     | ½, ¾, 1        | 15, 20, 25             |         |                  | 3           | 15          | 0.0022  | 0.0028 | 0.0037 | 0.0055 | 0.0082 | 0.0134 | 0.020  | 0.031  | 0.046  | 0.067  | 0.107  | 0.199  | 0.309 |
| ▶ 0.3  | 0.25     | ½, ¾, 1        | 15, 20, 25             |         |                  | 3           | 15          | 0.0044  | 0.0050 | 0.0062 | 0.0094 | 0.0157 | 0.0243 | 0.0367 | 0.0557 | 0.0886 | 0.138  | 0.214  | 0.317  | 0.364 |
| ▶ 0.5  | 0.4      | ½, ¾, 1, 1½, 2 | 15, 20, 25, 32, 40, 50 |         |                  | 6           | 15          | 0.009   | 0.010  | 0.013  | 0.022  | 0.033  | 0.051  | 0.074  | 0.107  | 0.151  | 0.221  | 0.328  | 0.504  | 0.871 |
| ▶ 0.75 | 0.63     | ½, ¾, 1, 1½, 2 | 15, 20, 25, 32, 40, 50 |         |                  | 6           | 15          | 0.015   | 0.022  | 0.028  | 0.042  | 0.061  | 0.083  | 0.119  | 0.166  | 0.246  | 0.364  | 0.533  | 0.782  | 1.2   |
| ▶ 1.2  | 1        | ½, ¾, 1, 1½, 2 | 15, 20, 25, 32, 40, 50 |         |                  | 6           | 15          | 0.022   | 0.029  | 0.036  | 0.051  | 0.076  | 0.113  | 0.172  | 0.261  | 0.390  | 0.572  | 0.853  | 1.27   | 1.46  |
| ▶ 2    | 1.6      | ½, ¾, 1, 1½, 2 | 15, 20, 25, 32, 40, 50 |         |                  | 12          | 15          | 0.0278  | 0.0379 | 0.0474 | 0.0725 | 0.111  | 0.169  | 0.255  | 0.392  | 0.595  | 0.900  | 1.34   | 1.97   | 3.00  |
| ▶ 3    | 2.5      | ½, ¾, 1, 1½, 2 | 15, 20, 25, 32, 40, 50 |         |                  | 12          | 15          | 0.040   | 0.054  | 0.069  | 0.113  | 0.177  | 0.276  | 0.421  | 0.640  | 0.972  | 1.43   | 2.10   | 3.21   | 4.30  |
| ▶ 5    | 4        | ½, ¾, 1, 1½, 2 | 15, 20, 25, 32, 40, 50 |         |                  | 12          | 15          | 0.095   | 0.111  | 0.136  | 0.204  | 0.309  | 0.441  | 0.653  | 1.008  | 1.60   | 2.74   | 4.08   | 4.85   | 5.2   |
| ▶ 7.5  | 6.3      | ¾, 1, 1½, 2    | 20, 25, 32, 40, 50     |         |                  | 24          | 15          | 0.16  | 0.20   | 0.24   | 0.34   | 0.48   | 0.73   | 1.10   | 1.56   | 2.32   | 3.40   | 5.01   | 7.69   | 10.5  |
| ▶ 12   | 10       | ¾, 1, 1½, 2    | 20, 25, 32, 40, 50     |         |                  | 24          | 15          | 0.15  | 0.27   | 0.34   | 0.54   | 0.81   | 1.18   | 1.69   | 2.43   | 3.52   | 5.4    | 9.4    | 12.1   | 14.2  |
| ▶ 20   | 16       | 1½, 2          | 32, 40, 50             |         |                  | 31          | 15          | 0.41  | 0.51   | 0.61   | 0.91   | 1.38   | 2.07   | 3.0    | 4.4    | 6.5    | 9.8    | 14.3   | 18.6   | 21.2  |
| ▶ 30   | 25       | 1½, 2, 2½, 3   | 40, 50, 65, 80         |         |                  | 38          | 15          | 0.60  | 0.75   | 0.92   | 1.32   | 1.99   | 3.0    | 4.8    | 7.8    | 12.0   | 17.2   | 22.5   | 27.5   | 30.9  |
| ▶ 47   | 40       | 2, 2½, 3       | 50, 65, 80             |         |                  | 48          | 15          | 0.86  | 0.93   | 1.14   | 2.3    | 5.0    | 9.3    | 15.4   | 22.4   | 29.2   | 35.5   | 40.6   | 45.3   | 49.2  |
| ▶ 70   | 60       | 2½, 3          | 65, 80                 |         |                  | 63          | 15          | 2.0   | 2.2    | 2.5    | 3.8    | 6.4    | 12.0   | 21.3   | 30.4   | 39.7   | 48.3   | 57.0   | 65.1   | 71.6  |
| ▶ 75   | 63       | 4, 6           | 100, 150               |         |                  | 63          | 30          | 1.9   | 2.3    | 2.9    | 4.1    | 5.8    | 8.3    | 12.1   | 17.1   | 25.8   | 39.9   | 57.1   | 72.3   | 84.3  |
| ▶ 95   | 80       | 3              | 80                     |         |                  | 80          | 15          | 2.8   | 3.5    | 4.3    | 6.2    | 9.1    | 13.8   | 22.6   | 32.8   | 44.6   | 57.8   | 71.3   | 85.5   | 99.1  |
| ▶ 120  | 100      | 3              | 80                     |         |                  | 80          | 19          | 2.8   | 3.7    | 4.8    | 7.8    | 12.8   | 23.3   | 36.8   | 52.5   | 69.5   | 87.3   | 104.4  | 120.1  | –     |
| ▶ 120  | 100      | 4, 6           | 100, 125, 150          |         |                  | 80          | 30          | 1.22  | 1.66   | 2.3    | 4.0    | 6.4    | 9.7    | 15.7   | 26.4   | 46.1   | 69.3   | 93.1   | 114.7  | 133.9 |
| ▶ 190  | 160      | 4, 6           | 100, 125, 150          |         |                  | 100         | 30          | 4.4   | 5.3    | 6.2    | 8.9    | 12.9   | 20.2   | 36.0   | 59.2   | 87.6   | 115.6  | 144.9  | 171.2  | 190.6 |
| ▶ –    | 200      | –              | 125                    |         |                  | 110         | 30          | 4.7   | 6.4    | 7.8    | 11.1   | 14.5   | 19.7   | 31.1   | 51.2   | 89.2   | 134.0  | 180.0  | 221.8  | 251.0 |
| ▶ 290  | 250      | 8, 10, 12      | 200, 250, 300          |         |                  | 125         | 60          | 8.0   | 9.6    | 11.5   | 16.3   | 23.5   | 33.3   | 48.5   | 68.6   | 103.8  | 160.4  | 229.2  | 290.5  | 338.9 |
| ▶ 300  | 260      | 6              | 150                    |         |                  | 130         | 30          | 8.1   | 9.7    | 12.9   | 22.5   | 42.5   | 77.5   | 116.5  | 157.3  | 196.0  | 235.5  | 271.8  | 305.3  | 334.5 |
| ▶ 420  | 360      | 8, 10, 12      | 200, 250, 300          |         |                  | 150         | 60          | 9.4   | 12.0   | 15.3   | 22.6   | 33.1   | 47.8   | 66.9   | 106.3  | 178.6  | 268.3  | 360.1  | 451.0  | 518.8 |
| ▶ 735  | 630      | 8, 10, 12      | 200, 250, 300          | 200     | 60               | 16.7        | 20.9        | 25.8  | 40.0   | 67.3   | 130.8  | 231.4  | 344.5  | 472.8  | 559.0  | 630.2  | 671.0  | 703.5  |        |       |
| ▶ 1150 | 1000     | 10, 12         | 250, 300               | 250     | 120              | 16.1        | 22.6        | 31.8  | 53.4   | 88.3   | 136.8  | 205.6  | 301.1  | 462.3  | 707.7  | 975.6  | 1241.9 | 1369.5 |        |       |
| ▶ 1730 | 1500     | 12             | 300                    | 300     | 120              | 23.2        | 32.6        | 45.9  | 77.1   | 119.3  | 177.9  | 267.3  | 391.4  | 601.0  | 920.0  | 1268.2 | 1614.2 | 1736.9 |        |       |



**Table 3241.22:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: Standard plug without flow divider, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS            | DN                     | NR      | CH     | Seat Ø [mm] | Travel [mm] | Travel in % · Flow coefficient ( $C_v$ coefficient) |        |       |       |       |       |        |        |        |        |        |       |       |
|--------|----------|----------------|------------------------|---------|--------|-------------|-------------|---|--------|-------|-------|-------|-------|--------|--------|--------|--------|--------|-------|-------|
|        |          |                |                        |         |        |             |             | 0   | 5      | 10    | 20    | 30    | 40    | 50     | 60     | 70     | 80     | 90     | 100   | 110   |
| ▶ 0.12 | 0.1      | ½, ¾, 1        | 15, 20, 25             | Without | Linear | 3           | 15          | 0.0016  | 0.0109 | 0.019 | 0.031 | 0.041 | 0.051 | 0.061  | 0.072  | 0.083  | 0.094  | 0.106  | 0.117 | 0.129 |
| ▶ 0.2  | 0.16     | ½, ¾, 1        | 15, 20, 25             |         |        | 3           | 15          | 0.0037  | 0.0130 | 0.022 | 0.038 | 0.056 | 0.074 | 0.093  | 0.112  | 0.130  | 0.149  | 0.167  | 0.186 | 0.206 |
| ▶ 0.3  | 0.25     | ½, ¾, 1        | 15, 20, 25             |         |        | 3           | 15          | 0.0057  | 0.029  | 0.046 | 0.074 | 0.101 | 0.129 | 0.156  | 0.184  | 0.211  | 0.238  | 0.266  | 0.293 | 0.320 |
| ▶ 0.5  | 0.4      | ½, ¾, 1, 1½, 2 | 15, 20, 25, 32, 40, 50 |         |        | 6           | 15          | 0.0068  | 0.040  | 0.067 | 0.119 | 0.166 | 0.213 | 0.260  | 0.307  | 0.355  | 0.402  | 0.449  | 0.496 | 0.544 |
| ▶ 0.75 | 0.63     | ½, ¾, 1, 1½, 2 | 15, 20, 25, 32, 40, 50 |         |        | 6           | 15          | 0.0076  | 0.045  | 0.083 | 0.161 | 0.238 | 0.315 | 0.392  | 0.469  | 0.546  | 0.623  | 0.699  | 0.776 | 0.853 |
| ▶ 1.2  | 1        | ½, ¾, 1, 1½, 2 | 15, 20, 25, 32, 40, 50 |         |        | 6           | 15          | 0.011   | 0.081  | 0.140 | 0.253 | 0.371 | 0.489 | 0.607  | 0.725  | 0.843  | 0.961  | 1.079  | 1.197 | 1.315 |
| ▶ 2    | 1.6      | ½, ¾, 1, 1½, 2 | 15, 20, 25, 32, 40, 50 |         |        | 12          | 15          | 0.028   | 0.122  | 0.217 | 0.407 | 0.604 | 0.802 | 0.999  | 1.196  | 1.394  | 1.59   | 1.79   | 1.99  | 2.18  |
| ▶ 3    | 2.5      | ½, ¾, 1, 1½, 2 | 15, 20, 25, 32, 40, 50 |         |        | 12          | 15          | 0.053   | 0.160  | 0.289 | 0.577 | 0.902 | 1.23  | 1.55   | 1.87   | 2.20   | 2.5    | 2.8    | 3.2   | 3.5   |
| ▶ 5    | 4        | ½, ¾, 1, 1½, 2 | 15, 20, 25, 32, 40, 50 |         |        | 12          | 15          | 0.054   | 0.28   | 0.51  | 0.97  | 1.44  | 1.90  | 2.4    | 2.8    | 3.3    | 3.8    | 4.2    | 4.7   | 5.1   |
| ▶ 7.5  | 6.3      | ¾, 1, 1½, 2    | 20, 25, 32, 40, 50     |         |        | 24          | 15          | 0.094   | 0.49   | 0.86  | 1.58  | 2.3   | 3.0   | 3.7    | 4.4    | 5.1    | 5.8    | 6.5    | 7.2   | 7.9   |
| ▶ 12   | 10       | ¾, 1, 1½, 2    | 20, 25, 32, 40, 50     |         |        | 24          | 15          | 0.10  | 0.73   | 1.3   | 2.5   | 3.6   | 4.8   | 6.0    | 7.2    | 8.3    | 9.5    | 10.7   | 11.9  | 13.0  |
| ▶ 20   | 16       | 1½, 2          | 32, 40, 50             |         |        | 31          | 15          | 0.30  | 1.37   | 2.3   | 4.1   | 5.9   | 7.8   | 9.6    | 11.4   | 13.2   | 15.1   | 17.2   | 19.3  | 21.4  |
| ▶ 30   | 25       | 1½, 2, 2½, 3   | 40, 50, 65, 80         |         |        | 38          | 15          | 0.48  | 0.89   | 1.41  | 3.5   | 6.4   | 9.4   | 12.4   | 15.3   | 18.3   | 21.2   | 24.2   | 27.2  | 30.1  |
| ▶ 47   | 40       | 2, 2½, 3       | 50, 65, 80             |         |        | 48          | 15          | 0.82  | 1.45   | 2.24  | 5.2   | 10.0  | 15.0  | 19.9   | 24.9   | 29.9   | 34.8   | 39.8   | 44.8  | 49.7  |
| ▶ 70   | 60       | 2½, 3          | 65, 80                 |         |        | 63          | 15          | 1.0   | 5.4    | 9.5   | 17.3  | 25.1  | 33.0  | 40.8   | 48.3   | 55.1   | 61.5   | 67.9   | 74.3  | 80.7  |
| ▶ 75   | 63       | 4, 6           | 100, 150               |         |        | 63          | 30          | 2.0   | 2.9    | 5.3   | 13.2  | 21.4  | 29.6  | 37.8   | 46.1   | 54.3   | 62.5   | 70.8   | 79.0  | 87.2  |
| ▶ 95   | 80       | 3              | 80                     |         |        | 80          | 15          | 1.4   | 4.2    | 7.2   | 14.5  | 21.8  | 29.6  | 37.4   | 46.3   | 56.3   | 66.3   | 76.4   | 86.4  | 96.4  |
| ▶ 120  | 100      | 3              | 80                     |         |        | 80          | 19          | 1.5   | 5.2    | 9.9   | 20.5  | 32.7  | 45.5  | 58.7   | 71.5   | 83.6   | 95.8   | 108.0  | 120.1 | –     |
| ▶ 120  | 100      | 4, 6           | 100, 125, 150          |         |        | 80          | 30          | 2.9   | 4.4    | 9.0   | 22.5  | 36.0  | 49.6  | 63.1   | 76.6   | 90.1   | 103.6  | 117.1  | 130.7 | 144.2 |
| ▶ 190  | 160      | 4, 6           | 100, 125, 150          |         |        | 100         | 30          | 4.8   | 6.8    | 13.0  | 31.8  | 49.9  | 68.0  | 86.2   | 104.3  | 122.4  | 140.5  | 158.7  | 176.8 | 192.9 |
| ▶ –    | 200      | –              | 125                    |         |        | 110         | 30          | 7.3   | 10.1   | 18.7  | 39.8  | 63.1  | 86.4  | 109.8  | 133.1  | 156.4  | 179.7  | 203.0  | 226.3 | 249.6 |
| ▶ 290  | 250      | 8, 10, 12      | 200, 250, 300          |         |        | 125         | 60          | 7.1   | 12.5   | 22.2  | 47.9  | 80.2  | 112.6 | 144.9  | 177.2  | 209.5  | 241.9  | 274.2  | 306.5 | 338.8 |
| ▶ 300  | 260      | 6              | 150                    |         |        | 130         | 30          | 6.9   | 9.5    | 13.8  | 29.5  | 59.7  | 93.7  | 132.7  | 173.5  | 210.5  | 246.7  | 282.9  | 319.1 | 350.8 |
| ▶ 420  | 360      | 8, 10, 12      | 200, 250, 300          |         |        | 150         | 60          | 10.6  | 15.5   | 26.9  | 66.2  | 115.1 | 163.9 | 212.8  | 261.7  | 310.5  | 359.4  | 408.3  | 457.1 | 506.0 |
| ▶ 735  | 630      | 8, 10, 12      | 200, 250, 300          | 200     | 60     | 18.7        | 40.9        | 65.7  | 127.6  | 193.0 | 264.1 | 331.8 | 400.6 | 465.9  | 531.3  | 596.6  | 662.0  | 722.7  |       |       |
| ▶ 1150 | 1000     | 10, 12         | 250, 300               | 250     | 120    | 17.8        | 28.6        | 66.5  | 187.6  | 316.8 | 446.0 | 575.2 | 704.4 | 833.5  | 962.7  | 1091.9 | 1221.1 | 1338.7 |       |       |
| ▶ 1730 | 1500     | 12             | 300                    | 300     | 120    | 23.2        | 38.4        | 104.0   | 275.5  | 443.6 | 611.7 | 779.8 | 947.9 | 1115.9 | 1284.0 | 1452.1 | 1620.2 | 1740.2 |       |       |

**Table 3241.23:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: Standard plug with flow divider St I, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS          | DN             | NR   | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |       |       |       |       |       |       |       |       |        |        |        |
|--------|----------|--------------|----------------|------|------------------|----------------|----------------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
|        |          |              |                |      |                  |                |                | 0   | 5     | 10    | 20    | 30    | 40    | 50    | 60    | 70    | 80    | 90     | 100    | 110    |
| ▶ 1.7  | 1.45     | ½, ¾, 1      | 15, 20, 25     | St I | Equal percentage | 12             | 15             | 0.028   | 0.037 | 0.046 | 0.071 | 0.106 | 0.16  | 0.23  | 0.37  | 0.58  | 0.88  | 1.32   | 1.94   | 3.0    |
| ▶ 2.6  | 2.2      | ½, ¾, 1      | 15, 20, 25     |      |                  | 12             | 15             | 0.025   | 0.029 | 0.05  | 0.09  | 0.17  | 0.27  | 0.41  | 0.62  | 0.95  | 1.41  | 2.07   | 3.1    | 4.2    |
| ▶ 4.2  | 3.6      | ½, ¾, 1      | 15, 20, 25     |      |                  | 12             | 15             | 0.077   | 0.094 | 0.12  | 0.18  | 0.28  | 0.43  | 0.65  | 0.99  | 1.52  | 2.5   | 3.8    | 4.6    | 5.0    |
| ▶ 7    | 5.7      | 1½, 2        | 32, 40, 50     |      |                  | 24             | 15             | 0.16  | 0.20  | 0.24  | 0.34  | 0.48  | 0.73  | 1.09  | 1.55  | 2.31  | 3.3   | 4.8    | 7.3    | 10.0   |
| ▶ 10.5 | 9        | 1½, 2        | 32, 40, 50     |      |                  | 24             | 15             | 0.15  | 0.27  | 0.34  | 0.54  | 0.81  | 1.18  | 1.69  | 2.4   | 3.5   | 5.3   | 9.2    | 11.9   | 13.9   |
| ▶ 17   | 14.5     | 1½, 2        | 32, 40, 50     |      |                  | 31             | 15             | 0.31  | 0.43  | 0.55  | 0.81  | 1.24  | 1.87  | 2.7   | 3.9   | 5.8   | 9.0   | 13.4   | 17.7   | 20.6   |
| ▶ 26   | 22       | 1½, 2, 2½, 3 | 40, 50, 65, 80 |      |                  | 38             | 15             | 0.60  | 0.75  | 0.92  | 1.32  | 1.99  | 3.0   | 4.8   | 7.8   | 11.9  | 16.9  | 21.8   | 26.4   | 29.5   |
| ▶ 42   | 36       | 2, 2½, 3     | 50, 65, 80     |      |                  | 48             | 15             | 0.86  | 0.93  | 1.14  | 2.31  | 5.0   | 9.3   | 15.4  | 21.5  | 27.2  | 32.5  | 37.0   | 41.3   | 44.5   |
| ▶ 62   | 54       | 2½, 3        | 65, 80         |      |                  | 63             | 15             | 2.0   | 2.2   | 2.5   | 3.8   | 6.4   | 12.0  | 21.3  | 30.4  | 39.1  | 46.7  | 53.1   | 59.3   | 63.2   |
| ▶ 67   | 57       | 4, 6         | 100, 150       |      |                  | 63             | 30             | 1.9   | 2.3   | 2.9   | 4.1   | 5.8   | 8.3   | 12.0  | 16.7  | 24.8  | 38.2  | 52.6   | 65.5   | 74.9   |
| ▶ 85   | 72       | 3            | 80             |      |                  | 80             | 15             | 2.8   | 3.5   | 4.3   | 6.2   | 9.1   | 13.8  | 22.6  | 32.8  | 44.2  | 54.6  | 67.3   | 77.0   | 85.0   |
| ▶ 105  | 90       | 4, 6         | 100, 125, 150  |      |                  | 80             | 30             | 1.2   | 1.7   | 2.3   | 4.0   | 6.4   | 9.7   | 15.7  | 26.4  | 45.6  | 64.7  | 84.7   | 100.9  | 116.3  |
| ▶ 170  | 144      | 4, 6         | 100, 150       |      |                  | 100            | 30             | 4.4   | 5.3   | 6.2   | 8.9   | 12.9  | 20.2  | 36.0  | 59.2  | 86.8  | 109.2 | 134.0  | 154.0  | 169.6  |
| ▶ 210  | 180      | –            | 125            |      |                  | 110            | 30             | 4.7   | 6.4   | 7.8   | 11.1  | 14.5  | 19.7  | 31.1  | 51.2  | 88.2  | 125.1 | 163.8  | 195.2  | 217.9  |
| ▶ 265  | 225      | 8, 10, 12    | 200, 250, 300  |      |                  | 125            | 60             | 8.0   | 9.6   | 11.5  | 16.3  | 23.5  | 33.3  | 48.5  | 68.6  | 103.0 | 153.4 | 215.5  | 267.3  | 309.1  |
| ▶ 275  | 234      | 6            | 150            |      |                  | 130            | 30             | 8.1   | 9.7   | 12.9  | 22.5  | 42.5  | 72.9  | 104.8 | 134.9 | 166.6 | 200.2 | 231.1  | 259.5  | 284.3  |
| ▶ 375  | 320      | 8, 10, 12    | 200, 250, 300  |      |                  | 150            | 60             | 9.4   | 12.0  | 15.3  | 22.6  | 33.1  | 47.8  | 66.9  | 106.3 | 177.1 | 255.9 | 337.5  | 413.1  | 470.9  |
| ▶ 650  | 560      | 8, 10, 12    | 200, 250, 300  |      |                  | 200            | 60             | 16.7  | 20.9  | 25.8  | 40.0  | 67.3  | 119.0 | 210.5 | 313.5 | 430.2 | 508.7 | 573.4  | 610.6  | 640.2  |
| ▶ 1040 | 900      | 10, 12       | 250, 300       |      |                  | 250            | 120            | 16.1  | 22.6  | 31.8  | 53.4  | 82.6  | 123.1 | 185.0 | 271.0 | 416.0 | 636.0 | 875.6  | 1112.2 | 1225.2 |
| ▶ 1560 | 1350     | 12           | 300            |      |                  | 300            | 120            | 23.2  | 32.6  | 45.9  | 77.1  | 119.3 | 177.9 | 267.3 | 391.4 | 595.0 | 869.4 | 1173.1 | 1452.7 | 1571.9 |

**Table 3241.24:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: Standard plug with flow divider St I, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS          | DN             | NR   | CH     | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $C_v$ coefficient) |      |      |       |       |       |       |       |        |        |        |        |        |
|--------|----------|--------------|----------------|------|--------|----------------|----------------|---|------|------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|
|        |          |              |                |      |        |                |                | 0   | 5    | 10   | 20    | 30    | 40    | 50    | 60    | 70     | 80     | 90     | 100    | 110    |
| ▶ 1.7  | 1.45     | ½, ¾, 1      | 15, 20, 25     | St I | Linear | 12             | 15             | 0.018   | 0.10 | 0.19 | 0.37  | 0.57  | 0.76  | 0.95  | 1.15  | 1.34   | 1.53   | 1.73   | 1.9    | 2.1    |
| ▶ 2.6  | 2.2      | ½, ¾, 1      | 15, 20, 25     |      |        | 12             | 15             | 0.033   | 0.13 | 0.26 | 0.54  | 0.87  | 1.19  | 1.52  | 1.85  | 2.2    | 2.5    | 2.8    | 3.2    | 3.5    |
| ▶ 4.2  | 3.6      | ½, ¾, 1      | 15, 20, 25     |      |        | 12             | 15             | 0.020   | 0.24 | 0.49 | 0.95  | 1.39  | 1.83  | 2.3   | 2.7   | 3.1    | 3.6    | 4.0    | 4.4    | 4.9    |
| ▶ 7    | 5.7      | 1½, 2        | 32, 40, 50     |      |        | 24             | 15             | 0.1   | 0.5  | 0.9  | 1.6   | 2.3   | 3.0   | 3.6   | 4.3   | 5.0    | 5.7    | 6.4    | 7.1    | 7.8    |
| ▶ 10.5 | 9        | 1½, 2        | 32, 40, 50     |      |        | 24             | 15             | 0.10  | 0.73 | 1.29 | 2.4   | 3.6   | 4.8   | 5.9   | 7.1   | 8.3    | 9.4    | 10.6   | 11.7   | 12.9   |
| ▶ 17   | 14.5     | 1½, 2        | 32, 40, 50     |      |        | 31             | 15             | 0.30  | 1.37 | 2.3  | 3.9   | 5.6   | 7.3   | 9.0   | 10.7  | 12.4   | 14.2   | 16.0   | 17.9   | 19.8   |
| ▶ 26   | 22       | 1½, 2, 2½, 3 | 40, 50, 65, 80 |      |        | 38             | 15             | 0.48  | 0.89 | 1.41 | 3.3   | 6.1   | 8.8   | 11.5  | 14.2  | 17.0   | 19.8   | 22.5   | 25.3   | 28.0   |
| ▶ 42   | 36       | 2, 2½, 3     | 50, 65, 80     |      |        | 48             | 15             | 0.82  | 1.45 | 2.24 | 4.9   | 9.5   | 14.1  | 18.7  | 23.4  | 28.1   | 32.7   | 37.4   | 42.1   | 46.8   |
| ▶ 62   | 54       | 2½, 3        | 65, 80         |      |        | 63             | 15             | 1.04  | 5.4  | 9.5  | 16.9  | 23.5  | 29.7  | 35.8  | 42.0  | 47.9   | 53.5   | 59.1   | 64.7   | 70.2   |
| ▶ 67   | 57       | 4, 6         | 100, 150       |      |        | 63             | 30             | 2.0   | 2.9  | 5.3  | 12.6  | 20.4  | 28.0  | 35.6  | 43.3  | 51.0   | 58.8   | 66.5   | 74.2   | 82.0   |
| ▶ 85   | 72       | 3            | 80             |      |        | 80             | 15             | 1.4   | 4.2  | 7.2  | 14.5  | 21.8  | 29.6  | 37.4  | 45.3  | 53.1   | 61.0   | 68.9   | 76.7   | 84.6   |
| ▶ 105  | 90       | 4, 6         | 100, 125, 150  |      |        | 80             | 30             | 2.9   | 4.4  | 8.7  | 20.1  | 32.1  | 44.2  | 55.5  | 67.4  | 79.3   | 91.2   | 103.1  | 115.0  | 126.9  |
| ▶ 170  | 144      | 4, 6         | 100, 150       |      |        | 100            | 30             | 4.8   | 6.8  | 13.0 | 28.3  | 44.5  | 60.7  | 75.8  | 91.8  | 107.7  | 123.7  | 139.6  | 155.6  | 169.7  |
| ▶ 210  | 180      | –            | 125            |      |        | 110            | 30             | 7.3   | 10.1 | 17.4 | 35.5  | 56.3  | 76.1  | 96.6  | 117.1 | 137.6  | 158.1  | 178.6  | 199.1  | 219.6  |
| ▶ 265  | 225      | 8, 10, 12    | 200, 250, 300  |      |        | 125            | 60             | 7.1   | 12.5 | 21.1 | 44.5  | 73.8  | 103.6 | 133.3 | 163.0 | 192.8  | 222.5  | 252.3  | 282.0  | 311.7  |
| ▶ 275  | 234      | 6            | 150            |      |        | 130            | 30             | 6.9   | 9.5  | 13.8 | 29.5  | 59.7  | 89.9  | 120.1 | 150.4 | 180.6  | 210.8  | 241.0  | 271.2  | 301.4  |
| ▶ 375  | 320      | 8, 10, 12    | 200, 250, 300  |      |        | 150            | 60             | 10.6  | 15.5 | 25.1 | 59.6  | 102.4 | 145.9 | 189.4 | 232.9 | 276.4  | 319.9  | 363.3  | 406.8  | 450.3  |
| ▶ 650  | 560      | 8, 10, 12    | 200, 250, 300  |      |        | 200            | 60             | 18.7  | 40.9 | 62.2 | 117.3 | 175.6 | 240.3 | 301.9 | 364.5 | 424.0  | 483.5  | 542.9  | 602.4  | 661.1  |
| ▶ 1040 | 900      | 10, 12       | 250, 300       |      |        | 250            | 120            | 17.8  | 28.6 | 62.5 | 170.8 | 285.1 | 401.4 | 517.7 | 633.9 | 750.2  | 866.4  | 982.7  | 1099.0 | 1204.8 |
| ▶ 1560 | 1350     | 12           | 300            |      |        | 300            | 120            | 23.2  | 38.4 | 97.7 | 248.0 | 399.2 | 550.5 | 701.8 | 853.1 | 1004.4 | 1155.6 | 1306.9 | 1458.2 | 1566.2 |

**Table 3241.25:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: Standard plug with flow divider St II, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS          | DN             | NR    | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $C_v$ coefficient) |      |      |      |       |       |       |       |       |       |        |        |        |
|--------|----------|--------------|----------------|-------|------------------|----------------|----------------|---|------|------|------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
|        |          |              |                |       |                  |                |                | 0   | 5    | 10   | 20   | 30    | 40    | 50    | 60    | 70    | 80    | 90     | 100    | 110    |
| ▶ 9.5  | 8        | 1½, 2        | 32, 40, 50     | St II | Equal percentage | 24             | 15             | 0.15  | 0.27 | 0.34 | 0.54 | 0.81  | 1.18  | 1.69  | 2.4   | 3.5   | 5.3   | 9.2    | 11.7   | 13.7   |
| ▶ 15   | 13       | 1½, 2        | 32, 40, 50     |       |                  | 31             | 15             | 0.31  | 0.43 | 0.55 | 0.81 | 1.24  | 1.87  | 2.7   | 3.9   | 5.7   | 8.9   | 13.1   | 17.2   | 19.9   |
| ▶ 23   | 20       | 1½, 2, 2½, 3 | 40, 50, 65, 80 |       |                  | 38             | 15             | 0.60  | 0.75 | 0.92 | 1.32 | 1.99  | 3.0   | 4.8   | 7.8   | 11.9  | 16.8  | 21.7   | 26.1   | 29.2   |
| ▶ 37   | 32       | 2, 2½, 3     | 50, 65, 80     |       |                  | 48             | 15             | 0.86  | 0.93 | 1.14 | 2.31 | 5.0   | 9.3   | 15.4  | 21.5  | 27.2  | 32.3  | 36.7   | 40.9   | 44.0   |
| ▶ 56   | 48       | 2½, 3        | 65, 80         |       |                  | 63             | 15             | 2.0   | 2.2  | 2.5  | 3.8  | 6.4   | 12.0  | 21.3  | 29.8  | 38.3  | 44.4  | 49.3   | 53.4   | 56.8   |
| ▶ 60   | 50       | 4, 6         | 100, 150       |       |                  | 63             | 30             | 1.9   | 2.3  | 2.9  | 4.1  | 5.8   | 8.3   | 12.1  | 16.8  | 25.1  | 37.2  | 50.6   | 61.8   | 70.3   |
| ▶ 95   | 80       | 4, 6         | 100, 125, 150  |       |                  | 80             | 30             | 1.2   | 1.7  | 2.3  | 4.0  | 6.4   | 9.7   | 15.7  | 26.0  | 44.5  | 63.6  | 80.5   | 94.0   | 106.2  |
| ▶ 145  | 125      | 4, 6         | 100, 150       |       |                  | 100            | 30             | 4.4   | 5.3  | 6.2  | 8.9  | 12.9  | 20.2  | 36.0  | 58.1  | 84.5  | 106.2 | 125.3  | 140.4  | 151.1  |
| ▶ 190  | 160      | –            | 125            |       |                  | 110            | 30             | 4.7   | 6.4  | 7.8  | 11.1 | 14.5  | 19.7  | 31.1  | 50.2  | 86.0  | 123.1 | 155.7  | 181.9  | 199.1  |
| ▶ 235  | 200      | 8, 10, 12    | 200, 250, 300  |       |                  | 125            | 60             | 8.0   | 9.6  | 11.5 | 16.3 | 23.5  | 33.3  | 48.5  | 67.5  | 100.5 | 148.9 | 201.7  | 244.0  | 276.5  |
| ▶ 245  | 210      | 6            | 150            |       |                  | 130            | 30             | 8.1   | 9.7  | 12.9 | 22.5 | 42.5  | 72.9  | 104.8 | 134.9 | 165.8 | 194.7 | 222.4  | 246.5  | 268.7  |
| ▶ 335  | 290      | 8, 10, 12    | 200, 250, 300  |       |                  | 150            | 60             | 9.4   | 12.0 | 15.3 | 22.6 | 33.1  | 47.8  | 66.9  | 104.5 | 172.6 | 245.5 | 314.2  | 374.3  | 417.4  |
| ▶ 580  | 500      | 8, 10, 12    | 200, 250, 300  |       |                  | 200            | 60             | 16.7  | 20.9 | 25.8 | 40.0 | 67.3  | 119.0 | 210.5 | 313.5 | 425.3 | 491.9 | 545.3  | 573.9  | 597.9  |
| ▶ 950  | 800      | 10, 12       | 250, 300       |       |                  | 250            | 120            | 16.1  | 22.6 | 31.8 | 53.4 | 82.6  | 123.1 | 185.0 | 271.0 | 414.0 | 619.2 | 844.4  | 1060.3 | 1162.7 |
| ▶ 1400 | 1200     | 12           | 300            |       |                  | 300            | 120            | 23.2  | 32.6 | 45.9 | 77.1 | 119.3 | 177.9 | 267.3 | 384.3 | 579.3 | 837.2 | 1097.0 | 1323.6 | 1442.7 |

**Table 3241.26:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: Standard plug with flow divider St II, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS          | DN             | NR    | CH     | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |      |      |       |       |       |       |       |       |        |        |        |        |
|--------|----------|--------------|----------------|-------|--------|----------------|--------|---|------|------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|
|        |          |              |                |       |        |                |        | 0   | 5    | 10   | 20    | 30    | 40    | 50    | 60    | 70    | 80     | 90     | 100    | 110    |
| ▶ 9.5  | 8        | 1½, 2        | 32, 40, 50     | St II | Linear | 24             | 15     | 0.10  | 0.73 | 1.29 | 2.4   | 3.6   | 4.7   | 5.9   | 7.0   | 8.2   | 9.3    | 10.5   | 11.6   | 12.8   |
| ▶ 15   | 13       | 1½, 2        | 32, 40, 50     |       |        | 31             | 15     | 0.30  | 1.37 | 2.3  | 3.9   | 5.6   | 7.2   | 8.8   | 10.5  | 12.2  | 13.9   | 15.8   | 17.6   | 19.5   |
| ▶ 23   | 20       | 1½, 2, 2½, 3 | 40, 50, 65, 80 |       |        | 38             | 15     | 0.48  | 0.89 | 1.41 | 3.3   | 6.0   | 8.7   | 11.4  | 14.1  | 16.8  | 19.5   | 22.3   | 25.0   | 27.7   |
| ▶ 37   | 32       | 2, 2½, 3     | 50, 65, 80     |       |        | 48             | 15     | 0.82  | 1.45 | 2.24 | 4.9   | 9.4   | 14.0  | 18.5  | 23.1  | 27.8  | 32.4   | 37.0   | 41.6   | 46.3   |
| ▶ 56   | 48       | 2½, 3        | 65, 80         |       |        | 63             | 15     | 1.04  | 5.4  | 9.5  | 16.2  | 22.5  | 28.5  | 34.4  | 40.5  | 46.3  | 51.7   | 57.0   | 62.4   | 67.8   |
| ▶ 60   | 50       | 4, 6         | 100, 150       |       |        | 63             | 30     | 2.0   | 2.9  | 5.3  | 12.5  | 20.2  | 27.8  | 35.2  | 42.8  | 50.5  | 58.2   | 65.8   | 73.5   | 81.1   |
| ▶ 95   | 80       | 4, 6         | 100, 125, 150  |       |        | 80             | 30     | 2.9   | 4.4  | 8.7  | 19.3  | 30.8  | 42.4  | 53.0  | 64.3  | 75.7  | 87.0   | 98.4   | 109.8  | 121.1  |
| ▶ 145  | 125      | 4, 6         | 100, 150       |       |        | 100            | 30     | 4.8   | 6.8  | 13.0 | 27.2  | 42.7  | 58.2  | 72.4  | 87.6  | 102.8 | 118.0  | 133.3  | 148.5  | 162.0  |
| ▶ 190  | 160      | –            | 125            |       |        | 110            | 30     | 7.3   | 10.1 | 16.7 | 33.4  | 52.9  | 70.9  | 90.0  | 109.1 | 128.2 | 147.3  | 166.4  | 185.6  | 204.7  |
| ▶ 235  | 200      | 8, 10, 12    | 200, 250, 300  |       |        | 125            | 60     | 7.1   | 12.5 | 20.1 | 41.0  | 67.4  | 94.6  | 121.7 | 148.9 | 176.0 | 203.2  | 230.3  | 257.5  | 284.6  |
| ▶ 245  | 210      | 6            | 150            |       |        | 130            | 30     | 6.9   | 9.5  | 13.8 | 29.5  | 53.9  | 80.7  | 109.7 | 138.8 | 168.4 | 197.3  | 226.3  | 255.2  | 280.6  |
| ▶ 335  | 290      | 8, 10, 12    | 200, 250, 300  |       |        | 150            | 60     | 10.6  | 15.5 | 25.6 | 61.4  | 100.1 | 139.2 | 178.4 | 217.5 | 256.7 | 295.9  | 335.0  | 374.2  | 413.3  |
| ▶ 580  | 500      | 8, 10, 12    | 200, 250, 300  |       |        | 200            | 60     | 18.7  | 40.9 | 60.2 | 111.5 | 165.9 | 227.1 | 285.3 | 344.5 | 400.7 | 456.9  | 513.1  | 569.3  | 621.5  |
| ▶ 950  | 800      | 10, 12       | 250, 300       |       |        | 250            | 120    | 17.8  | 28.6 | 60.9 | 164.0 | 272.5 | 383.6 | 494.7 | 605.8 | 716.8 | 827.9  | 939.0  | 1050.1 | 1151.3 |
| ▶ 1400 | 1200     | 12           | 300            |       |        | 300            | 120    | 23.2  | 38.4 | 92.7 | 225.9 | 363.7 | 501.6 | 639.4 | 777.2 | 915.1 | 1052.9 | 1190.7 | 1328.6 | 1427.0 |

**Table 3241.27:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: Standard plug with flow divider St III, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$ | $K_{vs}$ | NPS       | DN            | NR     | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $C_v$ coefficient) |      |      |      |      |       |       |       |       |       |       |        |        |
|-------|----------|-----------|---------------|--------|------------------|----------------|----------------|---|------|------|------|------|-------|-------|-------|-------|-------|-------|--------|--------|
|       |          |           |               |        |                  |                |                | 0   | 5    | 10   | 20   | 30   | 40    | 50    | 60    | 70    | 80    | 90    | 100    | 110    |
| ▶ 9   | 7.5      | 2         | 50            | St III | Equal percentage | 24             | 15             | 0.15  | 0.27 | 0.34 | 0.54 | 0.81 | 1.18  | 1.69  | 2.4   | 3.5   | 5.2   | 9.0   | 11.5   | 13.4   |
| ▶ 23  | 20       | 2½, 3     | 65, 80        |        |                  | 38             | 15             | 0.60  | 0.75 | 0.92 | 1.3  | 2.0  | 3.0   | 4.8   | 7.8   | 11.9  | 16.7  | 21.5  | 25.9   | 28.8   |
| ▶ 35  | 30       | 2½, 3     | 65, 80        |        |                  | 48             | 15             | 0.86  | 0.93 | 1.14 | 2.31 | 5.0  | 9.3   | 15.4  | 21.5  | 27.2  | 32.1  | 36.4  | 40.5   | 43.5   |
| ▶ 55  | 47       | 4, 6      | 100, 150      |        |                  | 63             | 30             | 1.9   | 2.3  | 2.9  | 4.1  | 5.6  | 7.5   | 9.9   | 13.8  | 20.9  | 32.9  | 47.2  | 60.3   | 69.0   |
| ▶ -   | 75       | 6         | 125, 150      |        |                  | 80             | 30             | 1.2   | 1.7  | 2.3  | 4.0  | 6.4  | 9.7   | 15.7  | 25.9  | 44.3  | 63.0  | 79.1  | 91.8   | 103.1  |
| ▶ 140 | 120      | 6         | 150           |        |                  | 100            | 30             | 4.4   | 5.3  | 6.2  | 8.9  | 12.9 | 20.2  | 36.0  | 58.0  | 84.0  | 104.6 | 122.1 | 135.2  | 144.6  |
| ▶ 220 | 190      | 8, 10, 12 | 200, 250, 300 |        |                  | 125            | 60             | 8.0   | 9.6  | 11.5 | 16.3 | 23.5 | 33.3  | 48.5  | 67.3  | 100.1 | 147.4 | 198.3 | 238.2  | 268.7  |
| ▶ 315 | 270      | 8, 10, 12 | 200, 250, 300 |        |                  | 150            | 60             | 9.4   | 12.0 | 15.3 | 22.6 | 33.1 | 47.8  | 66.9  | 97.9  | 148.4 | 211.0 | 280.3 | 354.2  | 389.8  |
| ▶ 560 | 480      | 10, 12    | 250, 300      |        |                  | 200            | 60             | 16.7  | 20.9 | 25.8 | 40.0 | 67.3 | 119.0 | 210.5 | 313.5 | 423.7 | 489.1 | 541.0 | 567.8  | 590.9  |
| ▶ 880 | 750      | 12        | 300           |        |                  | 250            | 120            | 16.1  | 22.6 | 31.8 | 53.4 | 82.6 | 123.1 | 185.0 | 271.0 | 413.1 | 612.4 | 831.9 | 1039.5 | 1137.6 |

**Table 3241.28:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: Standard plug with flow divider St III, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$ | $K_{vs}$ | NPS       | DN            | NR     | CH     | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $C_v$ coefficient) |      |      |       |       |       |       |       |       |       |       |        |        |
|-------|----------|-----------|---------------|--------|--------|----------------|----------------|---|------|------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|
|       |          |           |               |        |        |                |                | 0   | 5    | 10   | 20    | 30    | 40    | 50    | 60    | 70    | 80    | 90    | 100    | 110    |
| ▶ 9   | 7.5      | 2         | 50            | St III | Linear | 24             | 15             | 0.10  | 0.73 | 1.29 | 2.4   | 3.6   | 4.7   | 5.8   | 6.9   | 8.1   | 9.2   | 10.4  | 11.5   | 12.6   |
| ▶ 23  | 20       | 2½, 3     | 65, 80        |        |        | 38             | 15             | 0.48  | 0.89 | 1.41 | 3.2   | 6.0   | 8.6   | 11.2  | 13.9  | 16.6  | 19.3  | 22.0  | 24.7   | 27.4   |
| ▶ 35  | 30       | 2½, 3     | 65, 80        |        |        | 48             | 15             | 0.82  | 1.45 | 2.24 | 4.9   | 9.3   | 13.9  | 18.3  | 22.9  | 27.5  | 32.0  | 36.6  | 41.2   | 45.8   |
| ▶ 55  | 47       | 4, 6      | 100, 150      |        |        | 63             | 30             | 1.99  | 2.9  | 5.3  | 12.4  | 20.0  | 27.5  | 34.8  | 42.4  | 50.0  | 57.5  | 65.1  | 72.7   | 80.2   |
| ▶ -   | 75       | 6         | 125, 150      |        |        | 80             | 30             | 2.9   | 4.4  | 8.7  | 18.9  | 30.2  | 41.5  | 51.7  | 62.8  | 73.9  | 85.0  | 96.1  | 107.1  | 118.2  |
| ▶ 140 | 120      | 6         | 150           |        |        | 100            | 30             | 4.8   | 6.8  | 13.0 | 26.6  | 41.8  | 57.0  | 70.6  | 85.5  | 100.4 | 115.2 | 130.1 | 145.0  | 158.2  |
| ▶ 220 | 190      | 8, 10, 12 | 200, 250, 300 |        |        | 125            | 60             | 7.1   | 12.5 | 19.8 | 40.2  | 65.8  | 92.3  | 118.8 | 145.3 | 171.8 | 198.3 | 224.8 | 251.3  | 277.9  |
| ▶ 315 | 270      | 8, 10, 12 | 200, 250, 300 |        |        | 150            | 60             | 10.6  | 15.5 | 23.5 | 53.7  | 90.9  | 129.5 | 168.1 | 206.7 | 245.3 | 283.9 | 322.5 | 361.1  | 399.7  |
| ▶ 560 | 480      | 10, 12    | 250, 300      |        |        | 200            | 60             | 18.7  | 40.9 | 59.8 | 110.4 | 164.0 | 224.5 | 282.0 | 340.5 | 396.0 | 451.6 | 507.1 | 562.7  | 614.3  |
| ▶ 880 | 750      | 12        | 300           |        |        | 250            | 120            | 17.8  | 28.6 | 60.5 | 162.3 | 269.3 | 379.1 | 488.9 | 598.7 | 708.5 | 818.3 | 928.1 | 1037.9 | 1137.9 |

**Table 3241.29:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: AC-1 Trim with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS       | DN            | NR   | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |       |      |      |       |       |       |       |       |       |        |        |
|--------|----------|-----------|---------------|------|------------------|----------------|----------------|---|-------|-------|------|------|-------|-------|-------|-------|-------|-------|--------|--------|
|        |          |           |               |      |                  |                |                | 0   | 5     | 10    | 20   | 30   | 40    | 50    | 60    | 70    | 80    | 90    | 100    | 110    |
| ▶ 26   | 22       | 2, 3, 4   | 50, 80, 100   | AC-1 | Equal percentage | 38             | 15             | 0.40  | 0.49  | 0.64  | 1.1  | 1.7  | 2.7   | 4.0   | 5.8   | 9.0   | 14.5  | 19.8  | 24.7   | 28.4   |
| ▶ 40   | 35       | 2, 3      | 50, 80        |      |                  | 48             | 15             | 0.66  | 0.75  | 0.95  | 1.7  | 2.8  | 4.3   | 6.6   | 9.7   | 15.0  | 26.5  | 35.7  | 41.6   | 46.0   |
| ▶ 45   | 38       | 4         | 100           |      |                  | 48             | 15             | 0.80  | 0.98  | 1.2   | 2.0  | 3.1  | 4.6   | 6.8   | 10.1  | 15.2  | 22.6  | 33.3  | 45.8   | 58.1   |
| ▶ 60   | 50       | 3         | 80            |      |                  | 63             | 15             | 1.07  | 1.3   | 1.7   | 2.6  | 4.1  | 6.1   | 9.0   | 13.3  | 19.9  | 29.8  | 43.9  | 59.1   | 73.6   |
| ▶ 65   | 55       | 4         | 100           |      |                  | 63             | 30             | 1.2   | 1.4   | 1.8   | 2.9  | 4.5  | 6.7   | 9.9   | 14.6  | 21.9  | 32.7  | 48.2  | 66.4   | 84.0   |
| ▶ 90   | 75       | 4         | 100           |      |                  | 80             | 30             | 1.6   | 1.9   | 2.5   | 3.9  | 6.2  | 9.2   | 13.5  | 19.9  | 29.9  | 44.6  | 65.8  | 88.7   | 110.4  |
| ▶ 110  | 95       | 6         | 150           |      |                  | 80             | 30             | 2.0   | 2.5   | 3.1   | 5.0  | 7.8  | 11.6  | 17.1  | 25.2  | 37.9  | 56.5  | 83.3  | 114.6  | 145.1  |
| ▶ 170  | 145      | 6         | 150           |      |                  | 100            | 30             | 3.1   | 3.7   | 4.7   | 7.6  | 11.9 | 17.7  | 26.0  | 38.5  | 57.9  | 86.3  | 127.2 | 171.5  | 213.4  |
| ▶ 180  | 155      | 8, 10     | 200, 250      |      |                  | 100            | 30             | 3.3   | 4.0   | 5.1   | 8.2  | 12.7 | 19.0  | 27.8  | 41.2  | 61.8  | 92.3  | 135.9 | 187.0  | 236.8  |
| ▶ 240  | 205      | 6         | 150           |      |                  | 125            | 30             | 5.1   | 5.8   | 7.2   | 11.9 | 18.7 | 28.2  | 40.0  | 57.7  | 83.9  | 118.9 | 162.4 | 216.3  | 246.9  |
| ▶ 270  | 230      | 8, 10, 12 | 200, 250, 300 |      |                  | 125            | 60             | 4.9   | 5.9   | 7.5   | 12.1 | 18.9 | 28.1  | 41.3  | 61.1  | 91.8  | 136.9 | 201.7 | 277.5  | 351.4  |
| ▶ 360  | 305      | 8, 10, 12 | 200, 250, 300 |      |                  | 150            | 60             | 6.4   | 7.9   | 10.0  | 16.1 | 25.0 | 37.3  | 54.8  | 81.0  | 121.7 | 181.5 | 264.4 | 367.9  | 465.6  |
| ▶ 420  | 360      | 8, 10     | 200, 250      |      |                  | 200            | 60             | 6.9   | 8.4   | 10.4  | 16.5 | 25.4 | 37.7  | 56.4  | 83.9  | 123.5 | 192.6 | 307.1 | 413.9  | 478.3  |
| ▶ 560  | 480      | 8, 10, 12 | 200, 250, 300 |      |                  | 200            | 60             | 11.8  | 14.2  | 18.5  | 29.5 | 46.1 | 69.6  | 103.2 | 157.9 | 253.7 | 364.5 | 480.4 | 556.3  | 602.6  |
| ▶ 1150 | 1000     | 12        | 300           |      |                  | 250            | 120            | 15.96   | 19.13 | 24.83 | 43.3 | 71.8 | 110.0 | 164.9 | 248.8 | 367.7 | 545.9 | 830.1 | 1104.6 | 1257.7 |



**Table 3241.30:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: AC-2 Trim with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$ | $K_{vs}$ | NPS   | DN       | NR   | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $C_v$ coefficient) |      |      |      |      |      |       |       |       |       |       |       |       |
|-------|----------|-------|----------|------|------------------|----------------|----------------|---|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|
|       |          |       |          |      |                  |                |                | 0   | 5    | 10   | 20   | 30   | 40   | 50    | 60    | 70    | 80    | 90    | 100   | 110   |
| ▶ 160 | 135      | 8, 10 | 200, 250 | AC-2 | Equal percentage | 200            | 60             | 9.4   | 10.8 | 13.3 | 21.5 | 32.7 | 47.5 | 67.0  | 92.2  | 121.9 | 140.1 | 150.6 | 156.2 | 160.5 |
| ▶ 170 | 145      | 8, 10 | 200, 250 |      |                  | 200            | 60             | 15.2  | 17.3 | 20.6 | 28.8 | 39.1 | 53.0 | 72.0  | 99.0  | 130.9 | 150.5 | 161.2 | 168.0 | 172.1 |
| ▶ 180 | 155      | 8, 10 | 200, 250 |      |                  | 200            | 60             | 16.2  | 18.5 | 21.9 | 31.1 | 41.8 | 56.6 | 77.0  | 105.8 | 139.9 | 160.8 | 172.3 | 179.6 | 183.9 |
| ▶ 190 | 160      | 8, 10 | 200, 250 |      |                  | 200            | 60             | 16.7  | 19.1 | 22.6 | 32.1 | 43.1 | 58.5 | 79.4  | 109.2 | 144.4 | 166.0 | 177.9 | 185.4 | 191.1 |
| ▶ 200 | 170      | 8, 10 | 200, 250 |      |                  | 200            | 60             | 17.8  | 20.3 | 24.0 | 34.1 | 45.8 | 62.1 | 84.4  | 116.1 | 153.5 | 176.4 | 188.3 | 195.2 | 200.9 |
| ▶ 210 | 180      | 8, 10 | 200, 250 |      |                  | 200            | 60             | 12.5  | 14.4 | 17.8 | 28.7 | 43.6 | 63.3 | 89.4  | 122.9 | 162.5 | 186.8 | 199.3 | 206.1 | 211.8 |
| ▶ 220 | 190      | 8, 10 | 200, 250 |      |                  | 200            | 60             | 13.2  | 15.2 | 18.8 | 30.3 | 46.1 | 66.9 | 94.3  | 129.7 | 171.5 | 197.1 | 209.2 | 215.9 | 221.1 |
| ▶ 240 | 205      | 8, 10 | 200, 250 |      |                  | 200            | 60             | 12.0  | 14.2 | 17.7 | 27.9 | 42.6 | 62.1 | 88.8  | 125.3 | 174.6 | 209.3 | 226.3 | 235.0 | 240.6 |
| ▶ 255 | 220      | 8, 10 | 200, 250 |      |                  | 200            | 60             | 12.9  | 15.3 | 18.8 | 30.1 | 45.7 | 66.7 | 95.3  | 134.5 | 187.4 | 224.6 | 242.8 | 251.6 | 256.2 |
| ▶ 290 | 250      | 8, 10 | 200, 250 |      |                  | 200            | 60             | 11.9  | 14.2 | 17.8 | 28.8 | 44.1 | 65.4 | 94.3  | 136.6 | 201.4 | 250.6 | 277.9 | 290.7 | 297.6 |
| ▶ 305 | 260      | 8, 10 | 200, 250 |      |                  | 200            | 60             | 12.4  | 14.7 | 18.7 | 29.9 | 45.9 | 68.0 | 98.1  | 142.0 | 209.4 | 260.6 | 289.0 | 302.3 | 309.5 |
| ▶ 325 | 280      | 8, 10 | 200, 250 |      |                  | 200            | 60             | 8.2   | 9.2  | 11.3 | 18.3 | 28.3 | 41.4 | 61.5  | 89.7  | 129.2 | 189.9 | 269.7 | 324.3 | 354.2 |
| ▶ 375 | 320      | 8, 10 | 200, 250 |      |                  | 200            | 60             | 11.8  | 13.7 | 17.3 | 29.5 | 45.3 | 68.2 | 100.8 | 148.6 | 227.3 | 292.1 | 338.9 | 367.7 | 380.6 |

**Table 3241.31:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: Perforated plug without flow divider, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS             | DN                           | NR              | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |      |      |      |       |       |       |       |       |       |        |        |
|--------|----------|-----------------|------------------------------|-----------------|------------------|----------------|----------------|---|-------|------|------|------|-------|-------|-------|-------|-------|-------|--------|--------|
|        |          |                 |                              |                 |                  |                |                | 0   | 5     | 10   | 20   | 30   | 40    | 50    | 60    | 70    | 80    | 90    | 100    | 110    |
| ▶ 5    | 4        | 1, 1½, 2        | 25, 32, 40, 50               | Perforated plug | Equal percentage | 24             | 15             | 0.033   | 0.087 | 0.13 | 0.21 | 0.30 | 0.45  | 0.67  | 1.00  | 1.5   | 2.1   | 3.2   | 4.8    | 6.3    |
| ▶ 7.5  | 6.3      | 1, 1½, 2, 2½, 3 | 25, 32, 40, 50, 65, 80       |                 |                  | 24             | 15             | 0.073   | 0.17  | 0.22 | 0.33 | 0.51 | 0.71  | 1.06  | 1.7   | 2.6   | 3.7   | 5.2   | 6.8    | 7.5    |
| ▶ 12   | 10       | 1, 1½, 2, 2½, 3 | 32, 40, 50, 65, 80           |                 |                  | 31             | 15             | 0.20  | 0.20  | 0.26 | 0.38 | 0.66 | 1.04  | 1.7   | 2.8   | 4.7   | 7.8   | 10.3  | 12.5   | 14.7   |
| ▶ 20   | 16       | 1½, 2, 2½, 3    | 40, 50, 65, 80               |                 |                  | 38             | 15             | 0.33  | 0.50  | 0.67 | 1.10 | 1.5  | 2.2   | 3.2   | 5.0   | 8.3   | 11.6  | 15.0  | 18.2   | 21.2   |
| ▶ 30   | 25       | 2, 2½, 3        | 50, 65, 80                   |                 |                  | 48             | 15             | 0.55  | 0.92  | 1.2  | 2.1  | 2.7  | 3.9   | 6.9   | 11.1  | 15.9  | 20.6  | 25.6  | 29.7   | 33.8   |
| ▶ 42   | 36       | 2½, 3           | 65, 80                       |                 |                  | 63             | 15             | 0.42  | 1.06  | 1.4  | 2.1  | 3.4  | 5.4   | 9.0   | 14.2  | 20.5  | 28.1  | 35.6  | 41.6   | 46.2   |
| ▶ 47   | 40       | 3               | 80                           |                 |                  | 80             | 15             | 0.46  | 1.3   | 1.8  | 2.6  | 4.2  | 6.1   | 8.9   | 13.2  | 19.2  | 27.5  | 37.2  | 46.3   | 54.1   |
| ▶ 62   | 54       | 4, 6, 8, 10     | 100, 125, 150, 200, 250      |                 |                  | 63             | 30             | 0.62  | 1.11  | 1.3  | 1.8  | 3.6  | 5.6   | 9.5   | 17.1  | 27.5  | 40.1  | 53.5  | 63.1   | 68.7   |
| ▶ 75   | 63       | 4, 6, 8, 10     | 100, 125, 150, 200, 250      |                 |                  | 80             | 30             | 0.73  | 3.7   | 6.0  | 13.1 | 22.9 | 33.7  | 45.7  | 55.3  | 62.8  | 68.5  | 72.8  | 76.1   | 78.7   |
| ▶ 95   | 80       | 4, 6, 8, 10     | 100, 125, 150, 200, 250      |                 |                  | 80             | 30             | 0.92  | 1.4   | 1.5  | 3.0  | 4.7  | 10.1  | 23.8  | 42.7  | 59.9  | 74.9  | 88.2  | 99.4   | 107.1  |
| ▶ 120  | 100      | 4, 6, 8, 10, 12 | 100, 125, 150, 200, 250, 300 |                 |                  | 100            | 30             | 1.2   | 1.8   | 2.0  | 3.7  | 6.9  | 11.1  | 18.3  | 31.3  | 47.2  | 68.7  | 94.7  | 115.7  | 128.2  |
| ▶ 140  | 120      | 4               | 125                          |                 |                  | 110            | 30             | 1.4   | 2.1   | 2.7  | 5.9  | 10.6 | 17.4  | 27.4  | 40.6  | 60.1  | 84.5  | 113.3 | 136.8  | 154.1  |
| ▶ 190  | 160      | 6               | 150                          |                 |                  | 130            | 30             | 1.8   | 5.2   | 7.2  | 12.0 | 17.6 | 26.0  | 38.4  | 57.2  | 80.9  | 112.5 | 152.1 | 188.1  | 208.4  |
| ▶ 190  | 160      | 8, 10, 12       | 200, 250, 300                |                 |                  | 125            | 60             | 1.8   | 2.8   | 3.1  | 6.6  | 11.6 | 17.8  | 26.2  | 39.1  | 57.9  | 93.6  | 143.4 | 187.7  | 223.2  |
| ▶ 290  | 250      | 8, 10, 12       | 200, 250, 300                |                 |                  | 150            | 60             | 2.9   | 4.4   | 5.7  | 10.5 | 17.7 | 27.9  | 42.8  | 77.3  | 128.7 | 191.2 | 249.1 | 289.8  | 321.9  |
| ▶ 420  | 360      | 8, 10, 12       | 200, 250, 300                |                 |                  | 200            | 60             | 4.2   | 6.1   | 6.9  | 12.8 | 23.9 | 38.2  | 59.9  | 108.7 | 174.6 | 252.0 | 337.6 | 414.5  | 456.2  |
| ▶ 485  | 420      | 8, 10, 12       | 200, 250, 300                |                 |                  | 200            | 60             | 4.9   | 7.1   | 7.5  | 19.0 | 61.6 | 136.4 | 211.6 | 286.7 | 361.8 | 435.8 | 492.5 | 543.5  | 580.4  |
| ▶ 735  | 630      | 10, 12          | 250, 300                     |                 |                  | 250            | 120            | 7.3   | 7.5   | 10.2 | 21.3 | 39.0 | 63.8  | 100.1 | 151.5 | 268.2 | 426.6 | 603.5 | 772.8  | 810.4  |
| ▶ 1150 | 1000     | 12              | 300                          |                 |                  | 300            | 120            | 11.6  | 12.5  | 15.7 | 32.8 | 61.5 | 105.5 | 163.7 | 289.0 | 496.0 | 748.0 | 995.4 | 1180.2 | 1298.4 |

**Table 3241.32:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: Perforated plug without flow divider, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS             | DN                           | NR              | CH     | Seat Ø [mm] | Travel [mm] | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |       |       |       |       |        |        |        |        |        |        |        |
|--------|----------|-----------------|------------------------------|-----------------|--------|-------------|-------------|---|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|
|        |          |                 |                              |                 |        |             |             | 0   | 5     | 10    | 20    | 30    | 40    | 50     | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 5    | 4        | 1, 1½, 2        | 25, 32, 40, 50               | Perforated plug | Linear | 24          | 15          | 0.046   | 0.29  | 0.48  | 0.91  | 1.4   | 1.9   | 2.4    | 3.0    | 3.7    | 4.4    | 5.3    | 6.3    | 7.3    |
| ▶ 7.5  | 6.3      | 1, 1½, 2, 2½, 3 | 25, 32, 40, 50, 65, 80       |                 |        | 24          | 15          | 0.085   | 0.50  | 0.85  | 1.5   | 2.3   | 3.0   | 3.7    | 4.4    | 5.2    | 6.0    | 6.7    | 7.5    | 8.3    |
| ▶ 12   | 10       | 1, 1½, 2, 2½, 3 | 32, 40, 50, 65, 80           |                 |        | 31          | 15          | 0.12  | 0.61  | 1.10  | 2.0   | 3.0   | 4.2   | 5.5    | 6.9    | 8.2    | 9.7    | 11.3   | 12.9   | 14.1   |
| ▶ 20   | 16       | 1, 1½, 2, 2½, 3 | 32, 40, 50, 65, 80           |                 |        | 31          | 15          | 0.33  | 1.7   | 3.1   | 5.4   | 7.8   | 10.2  | 12.5   | 14.3   | 15.7   | 16.8   | 17.6   | 18.2   | 18.5   |
| ▶ 30   | 25       | 1½, 2, 2½, 3    | 40, 50, 65, 80               |                 |        | 38          | 15          | 0.007   | 1.3   | 2.9   | 6.8   | 10.5  | 14.3  | 17.5   | 20.8   | 23.2   | 25.4   | 27.0   | 27.7   | 28.4   |
| ▶ 42   | 36       | 2, 2½, 3        | 50, 65, 80                   |                 |        | 48          | 15          | 0.74  | 1.3   | 3.0   | 7.6   | 11.9  | 16.3  | 20.6   | 25.1   | 29.4   | 33.6   | 36.9   | 39.4   | 41.6   |
| ▶ 55   | 47       | 2½, 3           | 65, 80                       |                 |        | 63          | 15          | 0.91  | 4.3   | 7.4   | 13.8  | 19.9  | 26.5  | 33.0   | 38.9   | 44.3   | 48.9   | 52.9   | 56.1   | 58.7   |
| ▶ 70   | 60       | 3               | 80                           |                 |        | 80          | 15          | 0.69  | 4.3   | 7.9   | 15.3  | 22.7  | 30.6  | 39.0   | 46.5   | 54.1   | 61.5   | 68.0   | 74.3   | 79.3   |
| ▶ 75   | 63       | 4, 6, 8, 10     | 100, 125, 150, 200, 250      |                 |        | 63          | 30          | 0.73  | 3.7   | 6.5   | 13.8  | 23.5  | 34.3  | 45.7   | 55.3   | 62.8   | 68.5   | 72.8   | 76.1   | 78.7   |
| ▶ 120  | 100      | 4, 6, 8, 10     | 100, 125, 150, 200, 250      |                 |        | 80          | 30          | 1.2   | 8.0   | 15.7  | 32.5  | 48.1  | 62.7  | 76.2   | 87.9   | 97.4   | 103.8  | 108.9  | 113.1  | 116.4  |
| ▶ 160  | 130      | 4, 6, 8, 10, 12 | 100, 125, 150, 200, 250, 300 |                 |        | 100         | 30          | 0.62  | 6.4   | 14.0  | 31.3  | 49.2  | 67.0  | 84.5   | 100.2  | 114.7  | 127.1  | 136.9  | 145.2  | 152.6  |
| ▶ 190  | 160      | 4               | 125                          |                 |        | 110         | 30          | 1.8   | 12.8  | 23.5  | 44.7  | 66.2  | 88.8  | 110.2  | 128.8  | 146.0  | 161.4  | 173.4  | 185.2  | 194.4  |
| ▶ 245  | 210      | 6               | 150                          |                 |        | 130         | 30          | 2.4   | 16.2  | 28.6  | 56.1  | 83.8  | 112.7 | 140.6  | 165.2  | 188.6  | 209.6  | 228.2  | 245.3  | 259.8  |
| ▶ 290  | 250      | 8, 10, 12       | 200, 250, 300                |                 |        | 125         | 60          | 2.8   | 15.0  | 30.0  | 66.6  | 105.4 | 147.6 | 185.8  | 221.7  | 252.5  | 277.0  | 296.3  | 310.2  | 320.3  |
| ▶ 375  | 320      | 8, 10, 12       | 200, 250, 300                |                 |        | 150         | 60          | 3.7   | 19.1  | 36.7  | 77.7  | 122.3 | 174.3 | 225.1  | 270.4  | 305.5  | 328.3  | 341.0  | 344.4  | 346.8  |
| ▶ 580  | 500      | 8, 10, 12       | 200, 250, 300                |                 |        | 200         | 60          | 8.7   | 20.8  | 49.7  | 125.2 | 196.6 | 271.0 | 342.5  | 404.0  | 459.0  | 507.6  | 547.5  | 577.7  | 601.2  |
| ▶ 1040 | 900      | 10, 12          | 250, 300                     |                 |        | 250         | 120         | 10.4  | 52.0  | 106.0 | 227.7 | 363.0 | 515.6 | 659.0  | 790.8  | 896.0  | 975.7  | 1019.7 | 1043.5 | 1065.8 |
| ▶ 1500 | 1300     | 12              | 300                          |                 |        | 300         | 120         | 15.0  | 138.9 | 257.8 | 474.0 | 677.5 | 891.3 | 1084.4 | 1252.0 | 1371.1 | 1468.2 | 1526.0 | 1563.2 | 1563.4 |

**Table 3241.33:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: Perforated plug with flow divider St I, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS             | DN                           | NR                       | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |      |      |      |       |       |       |       |       |       |        |        |
|--------|----------|-----------------|------------------------------|--------------------------|------------------|----------------|----------------|---|-------|------|------|------|-------|-------|-------|-------|-------|-------|--------|--------|
|        |          |                 |                              |                          |                  |                |                | 0   | 5     | 10   | 20   | 30   | 40    | 50    | 60    | 70    | 80    | 90    | 100    | 110    |
| ▶ 4.2  | 3.6      | 1, 1½, 2        | 32, 40, 50                   | Perforated plug and St I | Equal percentage | 24             | 15             | 0.033   | 0.087 | 0.13 | 0.21 | 0.30 | 0.45  | 0.67  | 1.00  | 1.4   | 2.1   | 3.1   | 4.5    | 5.9    |
| ▶ 7    | 5.7      | 1, 1½, 2        | 32, 40, 50                   |                          |                  | 24             | 15             | 0.073   | 0.17  | 0.22 | 0.33 | 0.51 | 0.71  | 1.06  | 1.7   | 2.5   | 3.6   | 5.0   | 6.4    | 7.1    |
| ▶ 10.5 | 9        | 1, 1½, 2        | 32, 40, 50                   |                          |                  | 31             | 15             | 0.20  | 0.20  | 0.26 | 0.38 | 0.66 | 1.04  | 1.7   | 2.8   | 4.7   | 7.7   | 10.1  | 12.2   | 14.4   |
| ▶ 17   | 14.5     | 1½, 2, 2½, 3    | 40, 50, 65, 80               |                          |                  | 38             | 15             | 0.33  | 0.50  | 0.67 | 1.10 | 1.5  | 2.2   | 3.2   | 5.0   | 8.2   | 11.2  | 14.5  | 17.3   | 20.0   |
| ▶ 26   | 22       | 2, 2½, 3        | 50, 65, 80                   |                          |                  | 48             | 15             | 0.55  | 0.92  | 1.2  | 2.1  | 2.7  | 3.9   | 6.9   | 11.1  | 15.4  | 19.3  | 23.3  | 26.1   | 29.4   |
| ▶ 37   | 32       | 2½, 3           | 65, 80                       |                          |                  | 63             | 15             | 0.42  | 1.06  | 1.3  | 1.9  | 3.1  | 4.9   | 8.2   | 12.9  | 18.6  | 25.6  | 32.4  | 37.9   | 42.1   |
| ▶ 42   | 36       | 3               | 80                           |                          |                  | 80             | 15             | 0.46  | 1.3   | 1.8  | 2.6  | 4.2  | 6.1   | 8.9   | 13.2  | 18.7  | 26.2  | 34.7  | 42.1   | 48.7   |
| ▶ 55   | 47       | 4, 6, 8, 10     | 100, 125, 150, 200, 250      |                          |                  | 63             | 30             | 0.62  | 1.11  | 1.3  | 1.8  | 3.6  | 5.6   | 9.5   | 17.1  | 26.8  | 38.1  | 49.9  | 57.4   | 61.9   |
| ▶ 67   | 57       | 4, 6, 8, 10     | 100, 125, 150, 200, 250      |                          |                  | 80             | 30             | 0.73  | 1.3   | 1.7  | 3.0  | 4.7  | 7.0   | 10.3  | 17.5  | 27.5  | 42.0  | 55.9  | 67.1   | 75.1   |
| ▶ 85   | 72       | 4, 6, 8, 10     | 100, 125, 150, 200, 250      |                          |                  | 80             | 30             | 0.92  | 1.4   | 1.5  | 3.0  | 4.7  | 10.1  | 23.8  | 42.7  | 58.1  | 70.8  | 81.6  | 89.5   | 95.3   |
| ▶ 105  | 90       | 4, 6, 8, 10, 12 | 100, 125, 150, 200, 250, 300 |                          |                  | 100            | 30             | 1.2   | 1.8   | 2.0  | 3.7  | 6.9  | 11.1  | 18.3  | 31.3  | 45.5  | 64.1  | 86.2  | 101.8  | 111.3  |
| ▶ 120  | 100      | 4               | 125                          |                          |                  | 110            | 30             | 1.4   | 2.1   | 2.7  | 5.9  | 10.6 | 17.4  | 27.4  | 40.6  | 58.3  | 79.9  | 104.8 | 123.1  | 137.2  |
| ▶ 170  | 144      | 6               | 150                          |                          |                  | 130            | 30             | 1.8   | 5.2   | 7.2  | 12.0 | 17.6 | 26.0  | 38.4  | 57.2  | 78.5  | 106.3 | 140.7 | 169.3  | 185.5  |
| ▶ 170  | 144      | 8, 10, 12       | 200, 250, 300                |                          |                  | 125            | 60             | 1.8   | 2.8   | 3.1  | 6.6  | 11.6 | 17.8  | 26.2  | 39.1  | 56.2  | 88.4  | 132.7 | 168.9  | 198.7  |
| ▶ 265  | 225      | 8, 10, 12       | 200, 250, 300                |                          |                  | 150            | 60             | 2.9   | 4.4   | 5.7  | 10.5 | 17.7 | 27.9  | 42.8  | 77.3  | 125.6 | 182.8 | 234.2 | 266.6  | 293.6  |
| ▶ 375  | 320      | 8, 10, 12       | 200, 250, 300                |                          |                  | 200            | 60             | 4.2   | 6.1   | 6.9  | 12.8 | 23.9 | 38.2  | 59.9  | 108.7 | 170.1 | 240.2 | 316.1 | 379.3  | 413.5  |
| ▶ 435  | 375      | 8, 10, 12       | 200, 250, 300                |                          |                  | 200            | 60             | 4.9   | 7.1   | 7.5  | 19.0 | 61.6 | 136.4 | 211.6 | 286.7 | 352.6 | 415.5 | 461.1 | 497.3  | 526.1  |
| ▶ 650  | 560      | 10, 12          | 250, 300                     |                          |                  | 250            | 120            | 7.3   | 7.5   | 10.2 | 21.3 | 39.0 | 63.8  | 100.1 | 151.5 | 261.0 | 405.5 | 562.7 | 703.3  | 730.2  |
| ▶ 1040 | 900      | 12              | 300                          |                          |                  | 300            | 120            | 11.6  | 12.5  | 15.7 | 32.8 | 61.5 | 105.5 | 163.7 | 289.0 | 480.3 | 704.8 | 917.0 | 1056.2 | 1148.4 |

**Table 3241.34:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: Perforated plug with flow divider St I, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS             | DN                           | NR                       | CH     | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |       |       |       |       |       |        |        |        |        |        |        |
|--------|----------|-----------------|------------------------------|--------------------------|--------|----------------|----------------|---|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|
|        |          |                 |                              |                          |        |                |                | 0   | 5     | 10    | 20    | 30    | 40    | 50    | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 4.2  | 3.6      | 1, 1½, 2        | 32, 40, 50                   | Perforated plug and St I | Linear | 24             | 15             | 0.046   | 0.29  | 0.47  | 0.86  | 1.3   | 1.8   | 2.3   | 2.9    | 3.5    | 4.2    | 5.0    | 6.0    | 6.9    |
| ▶ 7    | 5.7      | 1, 1½, 2        | 32, 40, 50                   |                          |        | 24             | 15             | 0.085   | 0.50  | 0.84  | 1.5   | 2.2   | 3.0   | 3.7   | 4.4    | 5.1    | 5.9    | 6.7    | 7.4    | 8.2    |
| ▶ 10.5 | 9        | 1, 1½, 2        | 32, 40, 50                   |                          |        | 31             | 15             | 0.12  | 0.61  | 1.09  | 2.0   | 3.0   | 4.2   | 5.5   | 6.8    | 8.2    | 9.6    | 11.2   | 12.8   | 13.9   |
| ▶ 17   | 14.5     | 1, 1½, 2        | 32, 40, 50                   |                          |        | 31             | 15             | 0.33  | 1.73  | 2.9   | 5.1   | 7.3   | 9.5   | 11.6  | 13.3   | 14.6   | 15.6   | 16.4   | 16.9   | 17.2   |
| ▶ 26   | 22       | 1½, 2, 2½, 3    | 40, 50, 65, 80               |                          |        | 38             | 15             | 0.007   | 1.3   | 2.8   | 6.4   | 9.8   | 13.3  | 16.3  | 19.3   | 21.6   | 23.6   | 25.1   | 25.8   | 26.4   |
| ▶ 37   | 32       | 2, 2½, 3        | 50, 65, 80                   |                          |        | 48             | 15             | 0.74  | 1.3   | 2.9   | 7.1   | 11.2  | 15.4  | 19.4  | 23.6   | 27.6   | 31.6   | 34.7   | 37.0   | 39.1   |
| ▶ 50   | 43       | 2½, 3           | 65, 80                       |                          |        | 63             | 15             | 0.91  | 4.3   | 7.1   | 13.0  | 18.7  | 24.9  | 31.0  | 36.5   | 41.6   | 46.0   | 49.7   | 52.7   | 55.1   |
| ▶ 62   | 54       | 3               | 80                           |                          |        | 80             | 15             | 0.69  | 4.3   | 7.2   | 13.3  | 19.7  | 26.7  | 33.9  | 40.5   | 47.0   | 53.5   | 59.1   | 64.7   | 69.0   |
| ▶ 67   | 57       | 4, 6, 8, 10     | 100, 125, 150, 200, 250      |                          |        | 63             | 30             | 0.73  | 3.7   | 6.2   | 12.9  | 22.1  | 32.3  | 42.9  | 52.0   | 59.0   | 64.4   | 68.4   | 71.5   | 73.9   |
| ▶ 105  | 90       | 4, 6, 8, 10     | 100, 125, 150, 200, 250      |                          |        | 80             | 30             | 1.2   | 8.0   | 14.6  | 28.6  | 42.3  | 55.1  | 67.0  | 77.3   | 85.7   | 91.4   | 95.9   | 99.5   | 102.4  |
| ▶ 135  | 115      | 4, 6, 8, 10, 12 | 100, 125, 150, 200, 250, 300 |                          |        | 100            | 30             | 0.62  | 6.4   | 13.0  | 27.6  | 43.3  | 59.0  | 74.4  | 88.2   | 100.9  | 111.8  | 120.5  | 127.8  | 134.3  |
| ▶ 170  | 144      | 4               | 125                          |                          |        | 110            | 30             | 1.8   | 12.8  | 21.8  | 39.4  | 58.3  | 78.1  | 97.0  | 113.3  | 128.4  | 142.0  | 152.6  | 163.0  | 171.1  |
| ▶ 220  | 190      | 6               | 150                          |                          |        | 130            | 30             | 2.4   | 16.2  | 26.6  | 49.3  | 73.7  | 99.1  | 123.7 | 145.4  | 165.9  | 184.5  | 200.8  | 215.9  | 228.6  |
| ▶ 265  | 225      | 8, 10, 12       | 200, 250, 300                |                          |        | 125            | 60             | 2.8   | 15.0  | 28.5  | 61.3  | 97.0  | 135.8 | 170.9 | 204.0  | 232.3  | 254.8  | 272.6  | 285.4  | 294.7  |
| ▶ 325  | 280      | 8, 10, 12       | 200, 250, 300                |                          |        | 150            | 60             | 3.7   | 19.1  | 34.3  | 69.1  | 108.9 | 155.2 | 200.3 | 240.7  | 271.9  | 292.2  | 303.5  | 306.5  | 308.7  |
| ▶ 520  | 450      | 8, 10, 12       | 200, 250, 300                |                          |        | 200            | 60             | 8.7   | 20.8  | 47.0  | 113.9 | 178.9 | 246.6 | 311.7 | 367.6  | 417.7  | 461.9  | 498.2  | 525.7  | 547.1  |
| ▶ 950  | 800      | 10, 12          | 250, 300                     |                          |        | 250            | 120            | 10.4  | 52.0  | 99.6  | 205.0 | 326.7 | 464.0 | 593.1 | 711.7  | 806.4  | 878.2  | 917.8  | 939.1  | 959.2  |
| ▶ 1350 | 1150     | 12              | 300                          |                          |        | 300            | 120            | 15.0  | 138,9 | 242,3 | 426,6 | 609,7 | 802,2 | 976,0 | 1126,8 | 1234,0 | 1321,4 | 1373,4 | 1406,9 | 1407,0 |

**Table 3241.35:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: Perforated plug with flow divider St II, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$ | $K_{vs}$ | NPS             | DN                           | NR                        | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |      |      |      |       |       |       |       |       |       |        |        |
|-------|----------|-----------------|------------------------------|---------------------------|------------------|----------------|----------------|---|-------|------|------|------|-------|-------|-------|-------|-------|-------|--------|--------|
|       |          |                 |                              |                           |                  |                |                | 0   | 5     | 10   | 20   | 30   | 40    | 50    | 60    | 70    | 80    | 90    | 100    | 110    |
| ▶ 9.5 | 8        | 1, 1½, 2        | 32, 40, 50                   | Perforated plug and St II | Equal percentage | 31             | 15             | 0.20  | 0.20  | 0.26 | 0.38 | 0.66 | 1.04  | 1.7   | 2.8   | 4.7   | 7.7   | 10.0  | 12.1   | 14.3   |
| ▶ 15  | 13       | 1½, 2, 2½, 3    | 40, 50, 65, 80               |                           |                  | 38             | 15             | 0.33  | 0.50  | 0.67 | 1.10 | 1.5  | 2.2   | 3.2   | 5.0   | 8.2   | 11.2  | 14.3  | 17.2   | 19.8   |
| ▶ 23  | 20       | 2, 2½, 3        | 50, 65, 80                   |                           |                  | 48             | 15             | 0.55  | 0.92  | 1.2  | 2.1  | 2.7  | 3.9   | 6.9   | 11.0  | 15.4  | 19.0  | 22.5  | 24.9   | 27.6   |
| ▶ 34  | 29       | 2½, 3           | 65, 80                       |                           |                  | 63             | 15             | 0.42  | 1.06  | 1.3  | 1.9  | 3.0  | 4.7   | 7.9   | 12.5  | 18.0  | 24.7  | 31.3  | 36.6   | 40.7   |
| ▶ 50  | 43       | 4, 6, 8, 10     | 100, 125, 150, 200, 250      |                           |                  | 63             | 30             | 0.62  | 1.111 | 1.3  | 1.8  | 3.6  | 5.6   | 9.5   | 17.1  | 26.5  | 37.5  | 48.7  | 55.5   | 59.6   |
| ▶ 60  | 50       | 4, 6, 8, 10     | 100, 125, 150, 200, 250      |                           |                  | 80             | 15             | 0.73  | 1.3   | 1.7  | 3.0  | 4.7  | 7.0   | 10.3  | 17.5  | 27.1  | 40.7  | 53.6  | 63.3   | 70.4   |
| ▶ 75  | 63       | 4, 6, 8, 10     | 100, 125, 150, 200, 250      |                           |                  | 80             | 30             | 0.92  | 1.4   | 1.5  | 3.0  | 4.7  | 10.1  | 23.8  | 42.7  | 57.4  | 69.1  | 78.9  | 85.5   | 90.6   |
| ▶ 95  | 80       | 4, 6, 8, 10, 12 | 100, 125, 150, 200, 250, 300 |                           |                  | 100            | 30             | 1.2   | 1.8   | 2.0  | 3.7  | 6.9  | 11.1  | 18.3  | 30.8  | 45.5  | 62.5  | 81.9  | 94.9   | 101.7  |
| ▶ 110 | 95       | 4               | 125                          |                           |                  | 110            | 30             | 1.4   | 2.1   | 2.7  | 5.9  | 10.6 | 17.4  | 27.4  | 39.8  | 58.0  | 76.9  | 98.0  | 112.2  | 122.2  |
| ▶ 145 | 125      | 6               | 150                          |                           |                  | 130            | 30             | 1.8   | 5.2   | 7.2  | 12.0 | 17.6 | 26.0  | 38.4  | 56.2  | 78.0  | 102.4 | 131.6 | 154.3  | 165.2  |
| ▶ 145 | 125      | 8, 10, 12       | 200, 250, 300                |                           |                  | 125            | 60             | 1.8   | 2.8   | 3.1  | 6.6  | 11.6 | 17.8  | 26.2  | 38.4  | 55.8  | 85.1  | 124.1 | 153.9  | 177.0  |
| ▶ 235 | 200      | 8, 10, 12       | 200, 250, 300                |                           |                  | 150            | 60             | 2.9   | 4.4   | 5.7  | 10.5 | 17.7 | 27.9  | 42.8  | 76.1  | 124.6 | 175.9 | 219.2 | 243.4  | 262.7  |
| ▶ 335 | 290      | 8, 10, 12       | 200, 250, 300                |                           |                  | 200            | 60             | 4.2   | 6.1   | 6.9  | 12.8 | 23.9 | 38.2  | 59.9  | 106.8 | 168.6 | 230.6 | 294.5 | 344.0  | 367.0  |
| ▶ 390 | 340      | 8, 10, 12       | 200, 250, 300                |                           |                  | 200            | 60             | 4.9   | 7.1   | 7.5  | 19.0 | 61.6 | 136.4 | 211.6 | 281.8 | 349.5 | 398.8 | 429.7 | 451.1  | 466.9  |
| ▶ 580 | 500      | 10, 12          | 250, 300                     |                           |                  | 250            | 120            | 7.3   | 7.5   | 10.2 | 21.3 | 39.0 | 63.8  | 100.1 | 151.5 | 256.5 | 392.6 | 537.8 | 660.8  | 681.1  |
| ▶ 950 | 800      | 12              | 300                          |                           |                  | 300            | 120            | 11.6  | 12.5  | 15.7 | 32.8 | 61.5 | 105.5 | 163.7 | 284.7 | 481.1 | 691.9 | 883.4 | 1003.1 | 1074.4 |

**Table 3241.36:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: Perforated plug with flow divider St II, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS             | DN                           | NR                        | CH     | Seat Ø [mm] | Travel [mm] | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |       |       |       |       |       |        |        |        |        |        |        |
|--------|----------|-----------------|------------------------------|---------------------------|--------|-------------|-------------|---|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|
|        |          |                 |                              |                           |        |             |             | 0   | 5     | 10    | 20    | 30    | 40    | 50    | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 9.5  | 8        | 1, 1½, 2        | 32, 40, 50                   | Perforated plug and St II | Linear | 31          | 15          | 0.12  | 0.61  | 1.09  | 2.0   | 3.0   | 4.1   | 5.4   | 6.7    | 8.1    | 9.5    | 11.1   | 12.7   | 13.8   |
| ▶ 15   | 13       | 1, 1½, 2        | 32, 40, 50                   |                           |        | 31          | 15          | 0.33  | 1.7   | 2.9   | 5.0   | 7.1   | 9.3   | 11.4  | 13.0   | 14.2   | 15.2   | 16.0   | 16.5   | 16.8   |
| ▶ 23   | 20       | 1½, 2, 2½, 3    | 40, 50, 65, 80               |                           |        | 38          | 15          | 0.007   | 1.3   | 2.7   | 6.3   | 9.7   | 13.1  | 16.1  | 19.1   | 21.4   | 23.4   | 24.8   | 25.5   | 26.2   |
| ▶ 34   | 29       | 2, 2½, 3        | 50, 65, 80                   |                           |        | 48          | 15          | 0.74  | 1.3   | 2.9   | 7.0   | 11.0  | 15.2  | 19.2  | 23.3   | 27.3   | 31.2   | 34.3   | 36.6   | 38.7   |
| ▶ 45   | 38       | 2½, 3           | 65, 80                       |                           |        | 63          | 15          | 0.91  | 4.3   | 7.1   | 12.8  | 18.5  | 24.6  | 30.7  | 36.1   | 41.2   | 45.5   | 49.2   | 52.2   | 54.6   |
| ▶ 60   | 50       | 4, 6, 8, 10     | 100, 125, 150, 200, 250      |                           |        | 63          | 30          | 0.73  | 3.7   | 6.2   | 12.8  | 21.8  | 31.9  | 42.5  | 51.5   | 58.4   | 63.7   | 67.7   | 70.8   | 73.2   |
| ▶ 95   | 80       | 4, 6, 8, 10     | 100, 125, 150, 200, 250      |                           |        | 80          | 30          | 1.2   | 8.0   | 14.2  | 27.3  | 40.4  | 52.6  | 64.0  | 73.8   | 81.8   | 87.2   | 91.5   | 95.0   | 97.8   |
| ▶ 120  | 105      | 4, 6, 8, 10, 12 | 100, 125, 150, 200, 150, 300 |                           |        | 100         | 30          | 0.62  | 6.4   | 12.7  | 26.3  | 41.4  | 56.3  | 71.0  | 84.2   | 96.3   | 106.7  | 115.0  | 122.0  | 128.2  |
| ▶ 145  | 125      | 4               | 125                          |                           |        | 110         | 30          | 1.8   | 12.8  | 21.2  | 37.6  | 55.6  | 74.6  | 92.6  | 108.2  | 122.6  | 135.6  | 145.6  | 155.6  | 163.3  |
| ▶ 200  | 170      | 6               | 150                          |                           |        | 130         | 30          | 2.4   | 16.2  | 25.6  | 46.0  | 68.7  | 92.4  | 115.3 | 135.4  | 154.6  | 171.9  | 187.1  | 201.2  | 213.0  |
| ▶ 235  | 200      | 8, 10, 12       | 200, 250, 300                |                           |        | 125         | 60          | 2.8   | 15.0  | 27.1  | 55.9  | 88.6  | 124.0 | 156.1 | 186.3  | 212.1  | 232.7  | 248.9  | 260.5  | 269.1  |
| ▶ 295  | 255      | 8, 10, 12       | 200, 250, 300                |                           |        | 150         | 60          | 3.7   | 19.1  | 32.8  | 63.7  | 100.3 | 143.0 | 184.6 | 221.7  | 250.6  | 269.2  | 279.7  | 282.4  | 284.4  |
| ▶ 465  | 400      | 8, 10, 12       | 200, 250, 300                |                           |        | 200         | 60          | 8.7   | 20.8  | 45.5  | 107.7 | 169.1 | 233.1 | 294.6 | 347.4  | 394.7  | 436.6  | 470.9  | 496.8  | 517.0  |
| ▶ 835  | 720      | 10, 12          | 250, 300                     |                           |        | 250         | 120         | 10.4  | 52.0  | 97.1  | 195.9 | 312.2 | 443.4 | 566.7 | 680.0  | 770.5  | 839.1  | 877.0  | 897.4  | 916.6  |
| ▶ 1200 | 1040     | 12              | 300                          |                           |        | 300         | 120         | 15.0  | 138.9 | 230.0 | 388.7 | 555.5 | 730.9 | 889.2 | 1026.7 | 1124.3 | 1203.9 | 1251.3 | 1281.9 | 1282.0 |

**Table 3241.37:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: Perforated plug with flow divider St III, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$ | $K_{vs}$ | NPS             | DN                      | NR                         | CH               | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |      |      |      |      |       |       |       |       |       |       |       |       |
|-------|----------|-----------------|-------------------------|----------------------------|------------------|----------------|--------|---|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|
|       |          |                 |                         |                            |                  |                |        | 0   | 5    | 10   | 20   | 30   | 40    | 50    | 60    | 70    | 80    | 90    | 100   | 110   |
| ▶ 5.6 | 4.8      | 1, 1½, 2, 2½, 3 | 32, 40, 50, 65, 80      | Perforated plug and St III | Equal percentage | 24             | 15     | 0.073   | 0.17 | 0.22 | 0.33 | 0.51 | 0.71  | 1.06  | 1.7   | 2.5   | 3.6   | 5.0   | 6.4   | 7.1   |
| ▶ 9   | 7.5      | 2½, 3           | 65, 80                  |                            |                  | 31             | 15     | 0.20  | 0.20 | 0.26 | 0.38 | 0.66 | 1.04  | 1.7   | 2.8   | 4.6   | 7.6   | 9.9   | 11.8  | 13.9  |
| ▶ 14  | 12       | 2½, 3           | 65, 80                  |                            |                  | 38             | 15     | 0.33  | 0.50 | 0.67 | 1.10 | 1.5  | 2.2   | 3.2   | 5.0   | 8.1   | 11.1  | 14.1  | 16.8  | 19.3  |
| ▶ 23  | 20       | 2½, 3           | 65, 80                  |                            |                  | 48             | 15     | 0.55  | 0.92 | 1.2  | 2.1  | 2.7  | 3.9   | 6.9   | 10.9  | 15.4  | 18.8  | 22.1  | 24.3  | 26.8  |
| ▶ 47  | 40       | 4, 6, 8, 10     | 100, 125, 150, 200, 250 |                            |                  | 63             | 30     | 0.62  | 1.11 | 1.3  | 1.8  | 3.6  | 5.6   | 9.5   | 17.1  | 26.4  | 37.0  | 47.9  | 54.2  | 58.1  |
| ▶ 55  | 47       | 4, 6, 8, 10     | 125, 150, 200, 250      |                            |                  | 80             | 30     | 0.73  | 1.3  | 1.7  | 3.0  | 4.7  | 7.0   | 10.3  | 17.2  | 27.4  | 40.6  | 52.7  | 61.9  | 67.9  |
| ▶ 70  | 60       | 4, 6, 8, 10     | 125, 150, 200, 250      |                            |                  | 80             | 30     | 0.92  | 1.4  | 1.5  | 3.0  | 4.7  | 10.1  | 23.8  | 42.0  | 57.9  | 68.7  | 77.3  | 83.0  | 86.8  |
| ▶ 90  | 75       | 6, 8, 10, 12    | 150, 200, 250, 300      |                            |                  | 100            | 30     | 1.2   | 1.8  | 2.0  | 3.7  | 6.9  | 11.1  | 18.3  | 30.7  | 45.3  | 61.8  | 80.5  | 92.6  | 98.7  |
| ▶ 140 | 120      | 8, 10, 12       | 200, 250, 300           |                            |                  | 125            | 60     | 1.8   | 5.2  | 7.2  | 12.0 | 17.6 | 26.0  | 38.4  | 56.0  | 77.5  | 100.7 | 128.2 | 148.6 | 158.1 |
| ▶ 220 | 190      | 8, 10, 12       | 200, 250, 300           |                            |                  | 150            | 60     | 2.9   | 4.4  | 5.7  | 10.5 | 17.7 | 27.9  | 42.8  | 75.9  | 124.0 | 174.0 | 215.5 | 237.6 | 255.3 |
| ▶ 315 | 270      | 10, 12          | 250, 300                |                            |                  | 200            | 60     | 4.2   | 6.1  | 6.9  | 12.8 | 23.9 | 38.2  | 59.9  | 106.3 | 167.1 | 224.9 | 283.1 | 325.4 | 343.4 |
| ▶ 365 | 315      | 10, 12          | 250, 300                |                            |                  | 200            | 60     | 4.9   | 7.1  | 7.5  | 19.0 | 61.6 | 136.4 | 211.6 | 280.5 | 346.3 | 389.0 | 413.1 | 426.6 | 436.9 |
| ▶ 560 | 480      | 12              | 300                     |                            |                  | 250            | 120    | 7.3   | 7.5  | 10.2 | 21.3 | 39.0 | 63.8  | 100.1 | 149.1 | 259.9 | 393.5 | 533.3 | 653.1 | 666.0 |



**Table 3241.38:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: Perforated plug with flow divider St III, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$ | $K_{vs}$ | NPS             | DN                      | NR                         | CH     | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |      |      |       |       |       |       |       |       |       |       |       |       |
|-------|----------|-----------------|-------------------------|----------------------------|--------|----------------|--------|---|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|       |          |                 |                         |                            |        |                |        | 0   | 5    | 10   | 20    | 30    | 40    | 50    | 60    | 70    | 80    | 90    | 100   | 110   |
| ▶ 5.6 | 4.8      | 1, 1½, 2, 2½, 3 | 32, 40, 50, 65, 80      | Perforated plug and St III | Linear | 24             | 15     | 0.085   | 0.50 | 0.83 | 1.5   | 2.2   | 2.9   | 3.6   | 4.3   | 5.0   | 5.8   | 6.5   | 7.3   | 8.0   |
| ▶ 9   | 7.5      | 2½, 3           | 65, 80                  |                            |        | 31             | 15     | 0.12  | 0.61 | 1.08 | 2.0   | 2.9   | 4.1   | 5.4   | 6.7   | 8.0   | 9.4   | 11.0  | 12.6  | 13.6  |
| ▶ 14  | 12       | 2½, 3           | 65, 80                  |                            |        | 31             | 15     | 0.33  | 1.7  | 2.9  | 5.0   | 7.1   | 9.3   | 11.4  | 13.0  | 14.2  | 15.2  | 16.0  | 16.5  | 16.8  |
| ▶ 23  | 20       | 2½, 3           | 65, 80                  |                            |        | 38             | 15     | 0.007   | 1.3  | 2.7  | 6.2   | 9.6   | 13.0  | 16.0  | 18.9  | 21.1  | 23.1  | 24.6  | 25.2  | 25.9  |
| ▶ 31  | 27       | 2½, 3           | 65, 80                  |                            |        | 48             | 15     | 0.74  | 1.3  | 2.9  | 7.0   | 10.9  | 15.0  | 19.0  | 23.1  | 27.0  | 30.9  | 33.9  | 36.2  | 38.3  |
| ▶ 55  | 47       | 4, 6, 8, 10     | 100, 125, 150, 200, 250 |                            |        | 63             | 30     | 0.73  | 3.7  | 6.2  | 12.7  | 21.6  | 31.6  | 42.0  | 50.9  | 57.8  | 63.0  | 67.0  | 70.0  | 72.4  |
| ▶ 90  | 75       | 6, 8, 10        | 125, 150, 200, 250      |                            |        | 80             | 30     | 1.2   | 8.0  | 14.0 | 26.6  | 39.4  | 51.4  | 62.5  | 72.0  | 79.9  | 85.1  | 89.3  | 92.7  | 95.4  |
| ▶ 100 | 80       | 6, 8, 10, 12    | 150, 200, 250, 300      |                            |        | 100            | 30     | 0.6   | 6.4  | 12.5 | 25.7  | 40.4  | 54.9  | 69.3  | 82.2  | 94.0  | 104.2 | 112.3 | 119.1 | 125.1 |
| ▶ 220 | 190      | 8, 10, 12       | 200, 250, 300           |                            |        | 125            | 60     | 2.8   | 15.0 | 26.7 | 54.6  | 86.5  | 121.1 | 152.3 | 181.8 | 207.0 | 227.1 | 243.0 | 254.3 | 262.7 |
| ▶ 270 | 230      | 8, 10, 12       | 200, 250, 300           |                            |        | 150            | 60     | 3.7   | 19.1 | 32.1 | 61.4  | 96.6  | 137.7 | 177.8 | 213.6 | 241.4 | 259.4 | 269.4 | 272.1 | 274.0 |
| ▶ 435 | 375      | 10, 12          | 250, 300                |                            |        | 200            | 60     | 8.7   | 20.8 | 45.2 | 106.4 | 167.1 | 230.4 | 291.2 | 343.4 | 390.1 | 431.5 | 465.4 | 491.1 | 511.0 |
| ▶ 780 | 675      | 12              | 300                     |                            |        | 250            | 120    | 10.4  | 52.0 | 96.4 | 193.6 | 308.6 | 438.3 | 560.1 | 672.1 | 761.6 | 829.4 | 866.8 | 886.9 | 905.9 |

**Table 3241.39:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: without trim, with cast body

| Seat Ø<br>[mm] | Flow coefficient $C_v$ without trim |       |       |        |       |        |       |       |       |       |        |        |
|----------------|-------------------------------------|-------|-------|--------|-------|--------|-------|-------|-------|-------|--------|--------|
|                | NPS ½                               | NPS ¾ | NPS 1 | NPS 1½ | NPS 2 | NPS 2½ | NPS 3 | NPS 4 | NPS 6 | NPS 8 | NPS 10 | NPS 12 |
| 3              | 0.39                                | 0.39  | 0.39  | –      | –     | –      | –     | –     | –     | –     | –      | –      |
| 6              | 1.45                                | 1.45  | 1.5   | 1.55   | 1.55  | –      | –     | –     | –     | –     | –      | –      |
| 12             | 5.1                                 | 5.2   | 5.3   | 5.4    | 5.5   | –      | –     | –     | –     | –     | –      | –      |
| 24             | –                                   | 10    | 15    | 23     | 25    | –      | –     | –     | –     | –     | –      | –      |
| 31             | –                                   | –     | –     | 33.5   | 37    | –      | –     | –     | –     | –     | –      | –      |
| 38             | –                                   | –     | –     | 38     | 53    | 57     | 62    | –     | –     | –     | –      | –      |
| 48             | –                                   | –     | –     | –      | 58    | 83     | 94    | –     | –     | –     | –      | –      |
| 63             | –                                   | –     | –     | –      | –     | 97     | 111   | 147   | 157   | –     | –      | –      |
| 80             | –                                   | –     | –     | –      | –     | –      | 145   | 191   | 246   | –     | –      | –      |
| 100            | –                                   | –     | –     | –      | –     | –      | –     | 216   | 360   | –     | –      | –      |
| 110            | –                                   | –     | –     | –      | –     | –      | –     | –     | –     | –     | –      | –      |
| 125            | –                                   | –     | –     | –      | –     | –      | –     | –     | –     | 578   | 585    | 592    |
| 130            | –                                   | –     | –     | –      | –     | –      | –     | –     | 481   | –     | –      | –      |
| 150            | –                                   | –     | –     | –      | –     | –      | –     | –     | –     | 756   | 813    | 826    |
| 200            | –                                   | –     | –     | –      | –     | –      | –     | –     | –     | 810   | 1200   | 1390   |
| 250            | –                                   | –     | –     | –      | –     | –      | –     | –     | –     | –     | 1330   | 1790   |
| 300            | –                                   | –     | –     | –      | –     | –      | –     | –     | –     | –     | –      | 1930   |

**Table 3241.40:**  $C_v$  coefficients (gpm) for Type 3241 Globe Valve: without trim, with forged body

| Seat Ø<br>[mm] | Flow coefficient $C_v$ without trim |       |       |        |       |        |       |
|----------------|-------------------------------------|-------|-------|--------|-------|--------|-------|
|                | NPS ½                               | NPS ¾ | NPS 1 | NPS 1½ | NPS 2 | NPS 2½ | NPS 3 |
| 3              | 0.39                                | 0.39  | 0.39  | –      | –     | –      | –     |
| 6              | 1.45                                | 1.45  | 1.5   | 1.55   | 1.55  | –      | –     |
| 12             | 5.1                                 | 5.2   | 5.3   | 5.4    | 5.5   | –      | –     |
| 24             | –                                   | 9.7   | 14.9  | 18.6   | 20.5  | –      | –     |
| 31             | –                                   | –     | –     | 31     | 33.5  | –      | –     |
| 38             | –                                   | –     | –     | 37     | 49    | 50     | 51    |
| 48             | –                                   | –     | –     | –      | 56    | 67     | 73    |
| 63             | –                                   | –     | –     | –      | –     | 95     | 110   |
| 80             | –                                   | –     | –     | –      | –     | –      | 121   |





---

**K<sub>v</sub> coefficients (m<sup>3</sup>/h) for Type 3249 Angle Valve**

**with standard plug**

without flow divider

with equal percentage characteristic .... Table 3249.1

with linear characteristic ..... Table 3249.2

**C<sub>v</sub> coefficients (gpm) for Type 3249 Angle Valve**

**with standard plug**

without flow divider

with equal percentage characteristic .... Table 3249.3

with linear characteristic ..... Table 3249.4

**Table 3249.1:**  $K_V$  coefficients ( $m^3/h$ ) for Type 3249 Angle Valve: Standard plug without flow divider, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{VS}$ | $C_V$ | DN                      | NPS                   | NR      | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $K_V$ coefficient) |        |        |        |        |       |       |       |       |       |       |       |
|----------|-------|-------------------------|-----------------------|---------|------------------|----------------|----------------|---|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|
|          |       |                         |                       |         |                  |                |                | 0   | 5      | 10     | 20     | 30     | 40    | 50    | 60    | 70    | 80    | 90    | 100   |
| ▶ 0.1    | 0.12  | 15, 20, 25              | 1/2, 3/4, 1           | Without | Equal percentage | 6              | 7.5            | 0.0021  | 0.0041 | 0.0057 | 0.0080 | 0.0094 | 0.011 | 0.012 | 0.014 | 0.020 | 0.035 | 0.061 | 0.10  |
| ▶ 0.16   | 0.2   | 15, 20, 25              | 1/2, 3/4, 1           |         |                  | 6              | 7.5            | 0.0016  | 0.0040 | 0.0067 | 0.013  | 0.018  | 0.024 | 0.030 | 0.040 | 0.056 | 0.081 | 0.12  | 0.17  |
| ▶ 0.25   | 0.3   | 15, 20, 25              | 1/2, 3/4, 1           |         |                  | 6              | 7.5            | 0.0021  | 0.0049 | 0.0070 | 0.011  | 0.015  | 0.021 | 0.030 | 0.045 | 0.069 | 0.11  | 0.17  | 0.26  |
| ▶ 0.4    | 0.5   | 15, 20, 25              | 1/2, 3/4, 1           |         |                  | 6              | 7.5            | 0.0024  | 0.0050 | 0.0074 | 0.012  | 0.020  | 0.030 | 0.049 | 0.079 | 0.14  | 0.22  | 0.31  | 0.43  |
| ▶ 0.63   | 0.75  | 15, 20, 25              | 1/2, 3/4, 1           |         |                  | 6              | 7.5            | 0.014   | 0.018  | 0.023  | 0.036  | 0.059  | 0.091 | 0.13  | 0.18  | 0.24  | 0.31  | 0.43  | 0.65  |
| ▶ 1      | 1.2   | 15, 20, 25              | 1/2, 3/4, 1           |         |                  | 6              | 7.5            | 0.020   | 0.024  | 0.032  | 0.053  | 0.080  | 0.11  | 0.17  | 0.26  | 0.38  | 0.56  | 0.78  | 1.0   |
| ▶ 1.6    | 2     | 15, 20, 25              | 1/2, 3/4, 1           |         |                  | 12             | 7.5            | 0.021   | 0.038  | 0.051  | 0.070  | 0.094  | 0.13  | 0.21  | 0.33  | 0.49  | 0.78  | 1.2   | 1.9   |
| ▶ 2.5    | 3     | 15, 20, 25              | 1/2, 3/4, 1           |         |                  | 12             | 7.5            | 0.024   | 0.037  | 0.051  | 0.092  | 0.15   | 0.23  | 0.34  | 0.50  | 0.75  | 1.2   | 1.9   | 2.6   |
| ▶ 4      | 5     | 15, 20, 25              | 1/2, 3/4, 1           |         |                  | 12             | 7.5            | 0.053   | 0.077  | 0.10   | 0.17   | 0.26   | 0.39  | 0.62  | 0.99  | 1.5   | 2.2   | 3.0   | 4.1   |
| ▶ 6.3    | 7.5   | 25                      | 1                     |         |                  | 24             | 7.5            | 0.14  | 0.26   | 0.37   | 0.55   | 0.77   | 1.1   | 1.7   | 2.5   | 3.3   | 4.2   | 5.3   | 6.6   |
| ▶ 6.3    | 7.5   | 32, 40, 50, 65, 80, 100 | 1 1/2, 2, 2 1/2, 3, 4 |         |                  | 31             | 15             | 0.078   | 0.095  | 0.13   | 0.22   | 0.34   | 0.55  | 0.93  | 1.5   | 2.1   | 3.0   | 4.3   | 6.5   |
| ▶ 10     | 12    | 25                      | 1                     |         |                  | 24             | 7.5            | 0.15  | 0.21   | 0.34   | 0.83   | 1.9    | 3.1   | 4.6   | 6.1   | 7.6   | 9.0   | 10.4  | 11.4  |
| ▶ 10     | 12    | 32, 40, 50, 65, 80, 100 | 1 1/2, 2, 2 1/2, 3, 4 |         |                  | 31             | 15             | 0.21  | 0.23   | 0.24   | 0.33   | 0.53   | 0.89  | 1.3   | 2.0   | 2.9   | 4.6   | 7.2   | 10.6  |
| ▶ 16     | 20    | 32, 40, 50, 65, 80, 100 | 1 1/2, 2, 2 1/2, 3, 4 |         |                  | 31             | 15             | 0.35  | 0.38   | 0.45   | 0.70   | 1.1    | 1.5   | 2.1   | 3.0   | 4.9   | 8.2   | 12.3  | 17.3  |
| ▶ 25     | 30    | 40, 50, 65, 80, 100     | 1 1/2, 2, 2 1/2, 3, 4 |         |                  | 38             | 15             | 0.55  | 0.75   | 0.94   | 1.3    | 1.9    | 2.5   | 3.4   | 5.3   | 8.2   | 12.7  | 18.9  | 26.0  |
| ▶ 40     | 47    | 50, 65, 80, 100         | 2, 2 1/2, 3, 4        |         |                  | 48             | 15             | 0.89  | 1.1    | 1.2    | 2.0    | 4.5    | 8.9   | 13.8  | 18.8  | 23.8  | 29.1  | 34.4  | 40.1  |
| ▶ 60     | 70    | 65, 80, 100             | 2 1/2, 3, 4           |         |                  | 63             | 15             | 1.6   | 2.6    | 3.4    | 4.6    | 5.6    | 7.1   | 9.9   | 16.3  | 25.9  | 37.5  | 49.0  | 60.7  |
| ▶ 80     | 95    | 80, 100                 | 3, 4                  |         |                  | 80             | 30             | 2.1   | 2.5    | 3.4    | 6.1    | 10.1   | 16.6  | 24.6  | 35.2  | 47.5  | 61.4  | 73.0  | 82.2  |
| ▶ 100    | 120   | 80, 100                 | 3, 4                  |         |                  | 80             | 30             | 2.5   | 2.9    | 3.5    | 6.3    | 11.2   | 18.9  | 28.7  | 41.0  | 55.0  | 70.0  | 86.7  | 103.9 |
| ▶ 160    | 190   | 100                     | 4                     |         |                  | 100            | 30             | 2.9   | 3.7    | 5.3    | 11.9   | 23.4   | 40.6  | 63.0  | 86.2  | 110.2 | 133.9 | 156.8 | 178.4 |

**Table 3249.2:**  $K_v$  coefficients (m<sup>3</sup>/h) for Type 3249 Angle Valve: Standard plug without flow divider, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                      | NPS             | NR      | CH     | Seat Ø [mm] | Travel [mm] | Travel in % · Flow coefficient ( $K_v$ coefficient) |        |       |       |       |       |       |       |       |       |       |       |
|----------|-------|-------------------------|-----------------|---------|--------|-------------|-------------|---|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|          |       |                         |                 |         |        |             |             | 0   | 5      | 10    | 20    | 30    | 40    | 50    | 60    | 70    | 80    | 90    | 100   |
| ▶ 0.1    | 0.12  | 15, 20, 25              | ½, ¾, 1         | Without | Linear | 6           | 7.5         | 0.0010  | 0.0070 | 0.013 | 0.022 | 0.031 | 0.041 | 0.050 | 0.061 | 0.072 | 0.083 | 0.093 | 0.10  |
| ▶ 0.16   | 0.2   | 15, 20, 25              | ½, ¾, 1         |         |        | 6           | 7.5         | 0.0013  | 0.0082 | 0.016 | 0.033 | 0.052 | 0.071 | 0.090 | 0.11  | 0.12  | 0.14  | 0.16  | 0.18  |
| ▶ 0.25   | 0.3   | 15, 20, 25              | ½, ¾, 1         |         |        | 6           | 7.5         | 0.004   | 0.020  | 0.032 | 0.053 | 0.073 | 0.10  | 0.12  | 0.14  | 0.17  | 0.19  | 0.22  | 0.25  |
| ▶ 0.4    | 0.5   | 15, 20, 25              | ½, ¾, 1         |         |        | 6           | 7.5         | 0.0040  | 0.014  | 0.035 | 0.080 | 0.13  | 0.18  | 0.23  | 0.28  | 0.32  | 0.37  | 0.42  | 0.47  |
| ▶ 0.63   | 0.75  | 15, 20, 25              | ½, ¾, 1         |         |        | 6           | 7.5         | 0.0063  | 0.032  | 0.065 | 0.12  | 0.18  | 0.24  | 0.30  | 0.36  | 0.42  | 0.49  | 0.56  | 0.64  |
| ▶ 1      | 1.2   | 15, 20, 25              | ½, ¾, 1         |         |        | 6           | 7.5         | 0.010   | 0.078  | 0.13  | 0.22  | 0.29  | 0.37  | 0.45  | 0.54  | 0.64  | 0.76  | 0.88  | 1.0   |
| ▶ 1.6    | 2     | 15, 20, 25              | ½, ¾, 1         |         |        | 12          | 7.5         | 0.016   | 0.075  | 0.15  | 0.34  | 0.52  | 0.71  | 0.89  | 1.1   | 1.2   | 1.4   | 1.6   | 1.7   |
| ▶ 2.5    | 3     | 15, 20, 25              | ½, ¾, 1         |         |        | 12          | 7.5         | 0.025   | 0.18   | 0.33  | 0.64  | 0.94  | 1.2   | 1.5   | 1.8   | 2.0   | 2.3   | 2.5   | 2.8   |
| ▶ 4      | 5     | 15, 20, 25              | ½, ¾, 1         |         |        | 12          | 7.5         | 0.040   | 0.15   | 0.38  | 0.83  | 1.3   | 1.8   | 2.2   | 2.7   | 3.1   | 3.5   | 3.9   | 4.3   |
| ▶ 6.3    | 7.5   | 25                      | 1               |         |        | 24          | 7.5         | 0.13  | 0.67   | 1.0   | 1.7   | 2.3   | 2.9   | 3.5   | 4.2   | 4.8   | 5.4   | 6.0   | 6.5   |
| ▶ 6.3    | 7.5   | 32, 40, 50, 65, 80, 100 | 1½, 2, 2½, 3, 4 |         |        | 31          | 15          | 0.13  | 0.26   | 0.55  | 1.3   | 2.1   | 2.8   | 3.5   | 4.2   | 4.9   | 5.5   | 6.0   | 6.6   |
| ▶ 10     | 12    | 25                      | 1               |         |        | 24          | 7.5         | 0.22  | 0.65   | 1.1   | 2.0   | 2.8   | 3.8   | 4.7   | 5.7   | 6.8   | 8.0   | 9.5   | 11.0  |
| ▶ 10     | 12    | 32, 40, 50, 65, 80, 100 | 1½, 2, 2½, 3, 4 |         |        | 31          | 15          | 0.020   | 0.47   | 1.1   | 2.3   | 3.5   | 4.6   | 5.7   | 6.8   | 7.7   | 8.6   | 9.5   | 10.4  |
| ▶ 16     | 20    | 32, 40, 50, 65, 80, 100 | 1½, 2, 2½, 3, 4 |         |        | 31          | 15          | 0.27  | 1.3    | 2.2   | 4.1   | 5.7   | 7.4   | 9.0   | 10.6  | 12.2  | 13.9  | 15.5  | 17.3  |
| ▶ 25     | 30    | 40, 50, 65, 80, 100     | 1½, 2, 2½, 3, 4 |         |        | 38          | 15          | 0.42  | 1.3    | 2.6   | 5.0   | 7.5   | 10.0  | 12.4  | 14.9  | 17.4  | 20.2  | 23.0  | 25.9  |
| ▶ 40     | 47    | 50, 65, 80, 100         | 2, 2 1/2, 3, 4  |         |        | 48          | 15          | 0.67  | 1.8    | 3.6   | 7.5   | 11.3  | 15.2  | 19.2  | 23.2  | 27.2  | 31.5  | 35.9  | 40.7  |
| ▶ 60     | 70    | 65, 80, 100             | 2½, 3, 4        |         |        | 63          | 15          | 1.0   | 2.1    | 4.5   | 10.3  | 16.5  | 22.6  | 29.1  | 36.1  | 43.0  | 50.1  | 57.6  | 65.0  |
| ▶ 80     | 95    | 80, 100                 | 3, 4            |         |        | 80          | 30          | 2.2   | 4.0    | 6.7   | 12.9  | 20.4  | 29.3  | 38.3  | 47.6  | 57.1  | 66.0  | 74.7  | 83.3  |
| ▶ 100    | 120   | 80, 100                 | 3, 4            |         |        | 80          | 30          | 2.5   | 3.3    | 5.6   | 14.3  | 24.4  | 35.8  | 47.3  | 59.7  | 72.4  | 85.4  | 98.6  | 110.2 |
| ▶ 160    | 190   | 100                     | 4               |         |        | 100         | 30          | 5.17  | 6.65   | 9.3   | 21.3  | 36.7  | 53.3  | 70.2  | 88.7  | 108.0 | 127.5 | 147.1 | 167.1 |

**Table 3249.3:**  $C_v$  coefficients (gpm) for Type 3249 Angle Valve: Standard plug without flow divider, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS             | DN                      | NR      | CH               | Seat Ø<br>[mm] | Travel<br>[mm] | Travel in % · Flow coefficient ( $C_v$ coefficient) |        |        |        |        |       |       |       |       |       |       |       |
|--------|----------|-----------------|-------------------------|---------|------------------|----------------|----------------|---|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|
|        |          |                 |                         |         |                  |                |                | 0   | 5      | 10     | 20     | 30     | 40    | 50    | 60    | 70    | 80    | 90    | 100   |
| ▶ 0.12 | 0.1      | ½, ¾, 1         | 15, 20, 25              | Without | Equal percentage | 6              | 7.5            | 0.0024  | 0.0048 | 0.0066 | 0.0092 | 0.0108 | 0.012 | 0.014 | 0.016 | 0.023 | 0.040 | 0.070 | 0.11  |
| ▶ 0.2  | 0.16     | ½, ¾, 1         | 15, 20, 25              |         |                  | 6              | 7.5            | 0.0018  | 0.0046 | 0.0077 | 0.015  | 0.021  | 0.028 | 0.034 | 0.046 | 0.064 | 0.094 | 0.13  | 0.20  |
| ▶ 0.3  | 0.25     | ½, ¾, 1         | 15, 20, 25              |         |                  | 6              | 7.5            | 0.0025  | 0.0057 | 0.0081 | 0.013  | 0.018  | 0.024 | 0.035 | 0.051 | 0.080 | 0.12  | 0.19  | 0.30  |
| ▶ 0.5  | 0.4      | ½, ¾, 1         | 15, 20, 25              |         |                  | 6              | 7.5            | 0.0027  | 0.0058 | 0.0086 | 0.014  | 0.023  | 0.035 | 0.056 | 0.091 | 0.16  | 0.25  | 0.36  | 0.50  |
| ▶ 0.75 | 0.63     | ½, ¾, 1         | 15, 20, 25              |         |                  | 6              | 7.5            | 0.016   | 0.021  | 0.026  | 0.042  | 0.068  | 0.105 | 0.15  | 0.21  | 0.28  | 0.36  | 0.50  | 0.75  |
| ▶ 1.2  | 1        | ½, ¾, 1         | 15, 20, 25              |         |                  | 6              | 7.5            | 0.023   | 0.028  | 0.037  | 0.061  | 0.092  | 0.13  | 0.19  | 0.30  | 0.44  | 0.64  | 0.90  | 1.2   |
| ▶ 2    | 1.6      | ½, ¾, 1         | 15, 20, 25              |         |                  | 12             | 7.5            | 0.024   | 0.044  | 0.059  | 0.081  | 0.109  | 0.15  | 0.24  | 0.38  | 0.57  | 0.90  | 1.4   | 2.2   |
| ▶ 3    | 2.5      | ½, ¾, 1         | 15, 20, 25              |         |                  | 12             | 7.5            | 0.028   | 0.043  | 0.059  | 0.106  | 0.18   | 0.27  | 0.40  | 0.58  | 0.87  | 1.4   | 2.2   | 3.0   |
| ▶ 5    | 4        | ½, ¾, 1         | 15, 20, 25              |         |                  | 12             | 7.5            | 0.062   | 0.089  | 0.12   | 0.20   | 0.30   | 0.45  | 0.72  | 1.14  | 1.8   | 2.5   | 3.5   | 4.7   |
| ▶ 7.5  | 6.3      | 1               | 25                      |         |                  | 24             | 7.5            | 0.17  | 0.30   | 0.43   | 0.64   | 0.89   | 1.3   | 2.0   | 2.9   | 3.9   | 4.9   | 6.2   | 7.6   |
| ▶ 7.5  | 6.3      | 1½, 2, 2½, 3, 4 | 32, 40, 50, 65, 80, 100 |         |                  | 31             | 15             | 0.090   | 0.110  | 0.15   | 0.25   | 0.39   | 0.64  | 1.08  | 1.7   | 2.5   | 3.4   | 4.9   | 7.5   |
| ▶ 12   | 10       | 1               | 25                      |         |                  | 24             | 7.5            | 0.17  | 0.24   | 0.39   | 0.96   | 2.2    | 3.6   | 5.3   | 7.0   | 8.7   | 10.5  | 12.0  | 13.2  |
| ▶ 12   | 10       | 1½, 2, 2½, 3, 4 | 32, 40, 50, 65, 80, 100 |         |                  | 31             | 15             | 0.24  | 0.26   | 0.28   | 0.38   | 0.61   | 1.03  | 1.5   | 2.3   | 3.3   | 5.3   | 8.3   | 12.3  |
| ▶ 20   | 16       | 1½, 2, 2½, 3, 4 | 32, 40, 50, 65, 80, 100 |         |                  | 31             | 15             | 0.41  | 0.44   | 0.52   | 0.81   | 1.2    | 1.7   | 2.4   | 3.5   | 5.7   | 9.4   | 14.3  | 20.0  |
| ▶ 30   | 25       | 1½, 2, 2½, 3, 4 | 40, 50, 65, 80, 100     |         |                  | 38             | 15             | 0.64  | 0.87   | 1.09   | 1.6    | 2.2    | 2.9   | 4.0   | 6.2   | 9.5   | 14.7  | 21.9  | 30.0  |
| ▶ 47   | 40       | 2, 2 1/2, 3, 4  | 50, 65, 80, 100         |         |                  | 48             | 15             | 1.03  | 1.3    | 1.4    | 2.3    | 5.2    | 10.3  | 16.0  | 21.7  | 27.5  | 33.6  | 39.8  | 46.3  |
| ▶ 70   | 60       | 2½, 3, 4        | 65, 80, 100             |         |                  | 63             | 15             | 1.8   | 3.0    | 3.9    | 5.3    | 6.5    | 8.2   | 11.4  | 18.8  | 29.9  | 43.3  | 56.7  | 70.2  |
| ▶ 95   | 80       | 3, 4            | 80, 100                 |         |                  | 80             | 30             | 2.5   | 2.9    | 3.9    | 7.0    | 11.7   | 19.2  | 28.4  | 40.7  | 54.9  | 70.9  | 84.4  | 95.0  |
| ▶ 120  | 100      | 3, 4            | 80, 100                 |         |                  | 80             | 30             | 2.9   | 3.3    | 4.1    | 7.3    | 13.0   | 21.8  | 33.2  | 47.4  | 63.6  | 80.9  | 100.2 | 120.1 |
| ▶ 190  | 160      | 4               | 100                     |         |                  | 100            | 30             | 3.4   | 4.3    | 6.1    | 13.8   | 27.1   | 46.9  | 72.8  | 99.7  | 127.4 | 154.8 | 181.3 | 206.2 |



**Table 3249.4:**  $C_v$  coefficients (gpm) for Type 3249 Angle Valve: Standard plug without flow divider, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS             | DN                      | NR      | CH     | Seat Ø [mm] | Travel [mm] | Travel in % - Flow coefficient ( $C_v$ coefficient) |        |       |       |       |       |       |       |       |       |       |       |
|--------|----------|-----------------|-------------------------|---------|--------|-------------|-------------|---|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|        |          |                 |                         |         |        |             |             | 0   | 5      | 10    | 20    | 30    | 40    | 50    | 60    | 70    | 80    | 90    | 100   |
| ▶ 0.12 | 0.1      | ½, ¾, 1         | 15, 20, 25              | Without | Linear | 6           | 7.5         | 0.0012  | 0.0081 | 0.015 | 0.026 | 0.036 | 0.047 | 0.058 | 0.071 | 0.084 | 0.096 | 0.108 | 0.12  |
| ▶ 0.2  | 0.16     | ½, ¾, 1         | 15, 20, 25              |         |        | 6           | 7.5         | 0.0015  | 0.0095 | 0.018 | 0.038 | 0.060 | 0.082 | 0.104 | 0.12  | 0.14  | 0.17  | 0.18  | 0.20  |
| ▶ 0.3  | 0.25     | ½, ¾, 1         | 15, 20, 25              |         |        | 6           | 7.5         | 0.005   | 0.023  | 0.037 | 0.061 | 0.085 | 0.11  | 0.14  | 0.16  | 0.19  | 0.22  | 0.25  | 0.29  |
| ▶ 0.5  | 0.4      | ½, ¾, 1         | 15, 20, 25              |         |        | 6           | 7.5         | 0.0046  | 0.016  | 0.040 | 0.092 | 0.15  | 0.21  | 0.26  | 0.32  | 0.37  | 0.43  | 0.49  | 0.55  |
| ▶ 0.75 | 0.63     | ½, ¾, 1         | 15, 20, 25              |         |        | 6           | 7.5         | 0.0073  | 0.037  | 0.075 | 0.14  | 0.21  | 0.28  | 0.35  | 0.42  | 0.49  | 0.56  | 0.65  | 0.73  |
| ▶ 1.2  | 1        | ½, ¾, 1         | 15, 20, 25              |         |        | 6           | 7.5         | 0.012   | 0.090  | 0.15  | 0.25  | 0.33  | 0.42  | 0.52  | 0.63  | 0.74  | 0.87  | 1.02  | 1.2   |
| ▶ 2    | 1.6      | ½, ¾, 1         | 15, 20, 25              |         |        | 12          | 7.5         | 0.018   | 0.087  | 0.17  | 0.39  | 0.60  | 0.82  | 1.03  | 1.2   | 1.4   | 1.6   | 1.8   | 2.0   |
| ▶ 3    | 2.5      | ½, ¾, 1         | 15, 20, 25              |         |        | 12          | 7.5         | 0.029   | 0.21   | 0.38  | 0.73  | 1.08  | 1.4   | 1.7   | 2.1   | 2.4   | 2.7   | 2.9   | 3.2   |
| ▶ 5    | 4        | ½, ¾, 1         | 15, 20, 25              |         |        | 12          | 7.5         | 0.046   | 0.17   | 0.44  | 0.97  | 1.5   | 2.0   | 2.6   | 3.1   | 3.6   | 4.0   | 4.5   | 5.0   |
| ▶ 7.5  | 6.3      | 1               | 25                      |         |        | 24          | 7.5         | 0.15  | 0.77   | 1.2   | 1.9   | 2.6   | 3.4   | 4.1   | 4.8   | 5.5   | 6.3   | 7.0   | 7.5   |
| ▶ 7.5  | 6.3      | 1½, 2, 2½, 3, 4 | 32, 40, 50, 65, 80, 100 |         |        | 31          | 15          | 0.15  | 0.30   | 0.64  | 1.4   | 2.4   | 3.2   | 4.0   | 4.9   | 5.6   | 6.3   | 7.0   | 7.6   |
| ▶ 12   | 10       | 1               | 25                      |         |        | 24          | 7.5         | 0.25  | 0.75   | 1.2   | 2.3   | 3.3   | 4.4   | 5.5   | 6.6   | 7.9   | 9.3   | 10.9  | 12.8  |
| ▶ 12   | 10       | 1½, 2, 2½, 3, 4 | 32, 40, 50, 65, 80, 100 |         |        | 31          | 15          | 0.023   | 0.54   | 1.2   | 2.6   | 4.0   | 5.4   | 6.6   | 7.8   | 8.9   | 10.0  | 11.0  | 12.0  |
| ▶ 20   | 16       | 1½, 2, 2½, 3, 4 | 32, 40, 50, 65, 80, 100 |         |        | 31          | 15          | 0.31  | 1.5    | 2.5   | 4.7   | 6.6   | 8.6   | 10.4  | 12.3  | 14.1  | 16.0  | 18.0  | 19.9  |
| ▶ 30   | 25       | 1½, 2, 2½, 3, 4 | 40, 50, 65, 80, 100     |         |        | 38          | 15          | 0.48  | 1.5    | 3.0   | 5.8   | 8.7   | 11.6  | 14.4  | 17.3  | 20.2  | 23.3  | 26.5  | 29.9  |
| ▶ 47   | 40       | 2, 2 1/2, 3, 4  | 50, 65, 80, 100         |         |        | 48          | 15          | 0.77  | 2.0    | 4.2   | 8.7   | 13.1  | 17.6  | 22.2  | 26.8  | 31.4  | 36.4  | 41.5  | 47.0  |
| ▶ 70   | 60       | 2½, 3, 4        | 65, 80, 100             |         |        | 63          | 15          | 1.2   | 2.4    | 5.2   | 11.9  | 19.1  | 26.1  | 33.6  | 41.7  | 49.7  | 57.9  | 66.6  | 75.2  |
| ▶ 95   | 80       | 3, 4            | 80, 100                 |         |        | 80          | 30          | 2.6   | 4.6    | 7.7   | 14.9  | 23.6  | 33.9  | 44.3  | 55.0  | 66.0  | 76.3  | 86.4  | 96.3  |
| ▶ 120  | 100      | 3, 4            | 80, 100                 |         |        | 80          | 30          | 2.9   | 3.8    | 6.5   | 16.5  | 28.2  | 41.4  | 54.7  | 69.0  | 83.7  | 98.7  | 114.0 | 127.4 |
| ▶ 190  | 160      | 4               | 100                     |         |        | 100         | 30          | 5.97  | 7.69   | 10.8  | 24.6  | 42.4  | 61.6  | 81.2  | 102.5 | 124.9 | 147.5 | 170.1 | 193.2 |



**Type 3251 Globe Valve**

**K<sub>v</sub> coefficients (m<sup>3</sup>/h) for Type 3251 Globe Valve**

**Standard plug**

- without flow divider
  - with equal percentage characteristic .. Table 3251.1
  - with linear characteristic ..... Table 3251.2
- with flow divider St I
  - with equal percentage characteristic .. Table 3251.3
  - with linear characteristic ..... Table 3251.4
- with flow divider St II
  - with equal percentage characteristic .. Table 3251.5
  - with linear characteristic ..... Table 3251.6
- with flow divider St III
  - with equal percentage characteristic .. Table 3251.7
  - with linear characteristic ..... Table 3251.8

**AC-Trim**

- AC-1, equal percentage characteristic.... Table 3251.9
- AC-2, equal percentage characteristic.... Table 3251.10
- AC-3, equal percentage characteristic.... Table 3251.11
- AC-3 with linear characteristic..... Table 3251.12

**Perforated plug**

- without flow divider
  - with equal percentage characteristic .. Table 3251.13
  - with linear characteristic ..... Table 3251.14
- with flow divider St I
  - with equal percentage characteristic .. Table 3251.15
  - with linear characteristic ..... Table 3251.16
- with flow divider St II
  - with equal percentage characteristic .. Table 3251.17
  - with linear characteristic ..... Table 3251.18
- with flow divider St III
  - with equal percentage characteristic .. Table 3251.19
  - with linear characteristic ..... Table 3251.20

**Without trim**

- PN 40 ..... Table 3251.21

**C<sub>v</sub> coefficients (gpm) for Type 3251 Globe Valve**

**Standard plug**

- without flow divider
  - with equal percentage characteristic .. Table 3251.22
  - with linear characteristic ..... Table 3251.23
- with flow divider St I
  - with equal percentage characteristic .. Table 3251.24
  - with linear characteristic ..... Table 3251.25
- with flow divider St II
  - with equal percentage characteristic .. Table 3251.26
  - with linear characteristic ..... Table 3251.27
- with flow divider St III
  - with equal percentage characteristic .. Table 3251.28
  - with linear characteristic ..... Table 3251.29

**AC-Trim**

- AC-1, equal percentage characteristic Table 3251.30
- AC-2, equal percentage characteristic Table 3251.31
- AC-3, equal percentage characteristic Table 3251.32
- AC-3 with linear characteristic Table 3251.33

**Perforated plug**

- without flow divider
  - with equal percentage characteristic .. Table 3251.34
  - with linear characteristic ..... Table 3251.35
- with flow divider St I
  - with equal percentage characteristic .. Table 3251.36
  - with linear characteristic ..... Table 3251.37
- with flow divider St II
  - with equal percentage characteristic .. Table 3251.38
  - with linear characteristic ..... Table 3251.39
- with flow divider St III
  - with equal percentage characteristic Table 3251.40
  - with linear characteristic Table 3251.41

**Without trim**

- PN 40 ..... Table 3251.42

**Table 3251.1:**  $K_v$  coefficients (m<sup>3</sup>/h) for Type 3251 Globe Valve: Standard plug without flow divider, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                           | NPS                  | NR      | CH               | Seat Ø [mm] | Travel | Travel in % · Flow coefficient ( $K_v$ coefficient) |        |        |        |       |       |        |        |        |        |        |       |       |
|----------|-------|------------------------------|----------------------|---------|------------------|-------------|--------|---|--------|--------|--------|-------|-------|--------|--------|--------|--------|--------|-------|-------|
|          |       |                              |                      |         |                  |             |        | 0   | 5      | 10     | 20     | 30    | 40    | 50     | 60     | 70     | 80     | 90     | 100   | 110   |
| ▶ 0.1    | 0.12  | 15, 25, 40                   | ½, 1, 1½             | Without | Equal percentage | 6           | 15     | 0.0022  | 0.0029 | 0.0038 | 0.0062 | 0.009 | 0.013 | 0.018  | 0.025  | 0.034  | 0.051  | 0.074  | 0.094 | 0.111 |
| ▶ 0.16   | 0.2   | 15, 25, 40                   | ½, 1, 1½             |         |                  | 6           | 15     | 0.0035  | 0.0046 | 0.0058 | 0.0087 | 0.012 | 0.017 | 0.023  | 0.031  | 0.042  | 0.061  | 0.095  | 0.157 | 0.222 |
| ▶ 0.25   | 0.3   | 15, 25, 40                   | ½, 1, 1½             |         |                  | 6           | 15     | 0.0055  | 0.0061 | 0.0068 | 0.010  | 0.014 | 0.020 | 0.030  | 0.042  | 0.062  | 0.096  | 0.158  | 0.249 | 0.358 |
| ▶ 0.4    | 0.5   | 15, 25, 40                   | ½, 1, 1½             |         |                  | 6           | 15     | 0.0076  | 0.0087 | 0.010  | 0.015  | 0.023 | 0.036 | 0.057  | 0.087  | 0.126  | 0.181  | 0.267  | 0.439 | 0.865 |
| ▶ 0.63   | 0.75  | 15, 25, 40                   | ½, 1, 1½             |         |                  | 6           | 15     | 0.014   | 0.017  | 0.020  | 0.028  | 0.041 | 0.060 | 0.088  | 0.126  | 0.182  | 0.266  | 0.401  | 0.672 | 1.09  |
| ▶ 1      | 1.2   | 15, 25, 40                   | ½, 1, 1½             |         |                  | 6           | 15     | 0.022   | 0.028  | 0.034  | 0.048  | 0.069 | 0.10  | 0.15   | 0.22   | 0.32   | 0.50   | 0.76   | 1.10  | 1.45  |
| ▶ 1.6    | 2     | 15, 25, 40                   | ½, 1, 1½             |         |                  | 12          | 15     | 0.031   | 0.039  | 0.049  | 0.076  | 0.11  | 0.17  | 0.23   | 0.34   | 0.48   | 0.72   | 1.09   | 1.75  | 2.9   |
| ▶ 2.5    | 3     | 15, 25, 40                   | ½, 1, 1½             |         |                  | 12          | 15     | 0.051   | 0.060  | 0.074  | 0.11   | 0.16  | 0.25  | 0.37   | 0.55   | 0.80   | 1.19   | 1.78   | 2.6   | 3.5   |
| ▶ 4      | 5     | 12, 25, 40, 50, 80           | ½, 1, 1½, 2, 3       |         |                  | 24          | 15     | 0.078   | 0.09   | 0.11   | 0.17   | 0.25  | 0.35  | 0.50   | 0.70   | 1.06   | 1.65   | 2.6    | 4.3   | 6.4   |
| ▶ 6.3    | 7.5   | 25, 40, 50, 80               | 1, 1½, 2, 3          |         |                  | 24          | 15     | 0.14  | 0.18   | 0.22   | 0.33   | 0.49  | 0.69  | 0.99   | 1.45   | 2.2    | 3.2    | 4.7    | 6.7   | 8.7   |
| ▶ 10     | 12    | 25, 40, 50, 80               | 1, 1½, 2, 3          |         |                  | 24          | 15     | 0.21  | 0.28   | 0.36   | 0.56   | 0.81  | 1.13  | 1.54   | 2.2    | 3.1    | 4.5    | 6.6    | 9.4   | 10.7  |
| ▶ 16     | 20    | 40, 50, 80                   | 1½, 2, 3             |         |                  | 31          | 15     | 0.34  | 0.45   | 0.56   | 0.87   | 1.27  | 1.83  | 2.6    | 3.8    | 6.0    | 9.8    | 13.5   | 16.5  | 18.7  |
| ▶ 25     | 30    | 40, 50, 80, 100              | 1½, 2, 3, 4          |         |                  | 38          | 15     | 0.40  | 0.53   | 0.66   | 0.97   | 1.44  | 2.2   | 3.9    | 6.9    | 11.2   | 15.5   | 19.7   | 23.6  | 26.5  |
| ▶ 40     | 47    | 50, 80, 100                  | 2, 3, 4              |         |                  | 50          | 30     | 0.63  | 0.85   | 1.15   | 1.79   | 2.6   | 3.7   | 5.5    | 8.4    | 12.6   | 19.1   | 27.9   | 37.6  | 45.3  |
| ▶ 63     | 75    | 80, 100, 150                 | 3, 4, 6              |         |                  | 63          | 30     | 1.20  | 1.34   | 1.52   | 2.2    | 3.4   | 5.1   | 7.5    | 11.9   | 18.7   | 29.6   | 43.6   | 58.4  | 67.3  |
| ▶ 100    | 120   | 80, 100, 150, 200, 250       | 3, 4, 6, 8, 10       |         |                  | 80          | 30     | 1.38  | 1.66   | 2.1    | 3.5    | 5.7   | 9.3   | 14.7   | 23.5   | 37.9   | 58.8   | 78.2   | 93.8  | 104.4 |
| ▶ 160    | 190   | 100, 150, 200, 250, 300      | 4, 6, 8, 10, 12      |         |                  | 100         | 30     | 2.6   | 3.5    | 4.8    | 7.6    | 11.4  | 16.9  | 28.7   | 47.7   | 72.1   | 97.4   | 124.2  | 148.2 | 165.7 |
| ▶ 250    | 290   | 150, 200, 250, 300           | 6, 8, 10, 12         |         |                  | 125         | 60     | 4.1   | 5.6    | 7.2    | 11.8   | 18.2  | 26.9  | 38.3   | 55.9   | 89.0   | 153.4  | 212.5  | 261.7 | 293.5 |
| ▶ 360    | 420   | 150, 200, 250, 300, 350, 400 | 6, 8, 10, 12, 14, 16 |         |                  | 150         | 60     | 5.8   | 7.5    | 10.3   | 16.1   | 24.1  | 35.4  | 51.5   | 81.8   | 140.4  | 218.4  | 288.8  | 345.8 | 381.9 |
| ▶ 630    | 735   | 200, 250, 300, 350, 400      | 8, 10, 12, 14, 16    |         |                  | 200         | 60     | 9.4   | 14.9   | 20.0   | 36.3   | 71.8  | 131.5 | 222.7  | 327.6  | 419.4  | 498.1  | 561.3  | 602.2 | 625.6 |
| ▶ 1000   | 1150  | 250, 300, 350, 400, 500      | 10, 12, 14, 16, 20   | 250     | 120              | 15.5        | 21.7   | 30.5  | 51.3   | 79.4   | 118.3  | 177.8 | 260.4 | 399.9  | 612.2  | 843.9  | 1074.2 | 1184.6 |       |       |
| ▶ 1500   | 1730  | 300, 350, 400, 500           | 12, 14, 16, 20       | 300     | 120              | 20.1        | 31.0   | 43.7  | 73.4   | 113.5  | 169.2  | 254.3 | 372.4 | 571.8  | 875.4  | 1206.7 | 1536.2 | 1694.0 |       |       |
| ▶ 2000   | 2300  | 350, 400, 500                | 14, 16, 20           | 350     | 120              | 27.8        | 39.1   | 55.0  | 92.4   | 142.9  | 213.0  | 320.1 | 468.7 | 719.8  | 1101.9 | 1518.9 | 1933.6 | 2132.3 |       |       |
| ▶ 2500   | 2900  | 400, 500                     | 16, 20               | 400     | 120              | 35.1        | 49.3   | 69.3  | 116.5  | 180.2  | 268.6  | 403.6 | 591.0 | 907.5  | 1389.3 | 1915.1 | 2438.0 | 2688.4 |       |       |
| ▶ 4000   | 4700  | 500                          | 20                   | 500     | 120              | 54.1        | 76.0   | 106.9   | 179.6  | 277.9  | 414.2  | 622.4 | 911.5 | 1399.6 | 2142.6 | 2953.5 | 3759.9 | 4146.1 |       |       |

**Table 3251.2:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: Standard plug without flow divider, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                           | NPS                  | NR      | CH     | Seat Ø [mm] | Travel | Travel in % · Flow coefficient (KV coefficient) |        |        |        |        |        |        |        |        |        |        |       |       |
|----------|-------|------------------------------|----------------------|---------|--------|-------------|--------|---|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------|-------|
|          |       |                              |                      |         |        |             |        | 0   | 5      | 10     | 20     | 30     | 40     | 50     | 60     | 70     | 80     | 90     | 100   | 110   |
| ▶ 0.1    | 0.12  | 15, 25, 40                   | ½, 1, 1½             | Without | Linear | 6           | 15     | 0.0022  | 0.0067 | 0.012  | 0.021  | 0.030  | 0.039  | 0.048  | 0.058  | 0.067  | 0.076  | 0.085  | 0.094 | 0.103 |
| ▶ 0.16   | 0.2   | 15, 25, 40                   | ½, 1, 1½             |         |        | 6           | 15     | 0.0035  | 0.0059 | 0.011  | 0.025  | 0.041  | 0.057  | 0.074  | 0.090  | 0.107  | 0.123  | 0.140  | 0.156 | 0.172 |
| ▶ 0.25   | 0.3   | 15, 25, 40                   | ½, 1, 1½             |         |        | 6           | 15     | 0.0039  | 0.011  | 0.022  | 0.046  | 0.070  | 0.094  | 0.117  | 0.141  | 0.165  | 0.189  | 0.213  | 0.236 | 0.260 |
| ▶ 0.4    | 0.5   | 15, 25, 40                   | ½, 1, 1½             |         |        | 6           | 15     | 0.0087  | 0.020  | 0.038  | 0.079  | 0.123  | 0.166  | 0.209  | 0.252  | 0.295  | 0.338  | 0.381  | 0.424 | 0.467 |
| ▶ 0.63   | 0.75  | 15, 25, 40                   | ½, 1, 1½             |         |        | 6           | 15     | 0.013   | 0.039  | 0.069  | 0.136  | 0.205  | 0.275  | 0.344  | 0.414  | 0.483  | 0.553  | 0.622  | 0.692 | 0.762 |
| ▶ 1      | 1.2   | 15, 25, 40                   | ½, 1, 1½             |         |        | 6           | 15     | 0.019   | 0.099  | 0.169  | 0.278  | 0.380  | 0.483  | 0.586  | 0.689  | 0.792  | 0.894  | 1.00   | 1.10  | 1.20  |
| ▶ 1.6    | 2     | 15, 25, 40                   | ½, 1, 1½             |         |        | 12          | 15     | 0.035   | 0.11   | 0.19   | 0.36   | 0.53   | 0.70   | 0.87   | 1.04   | 1.22   | 1.39   | 1.56   | 1.73  | 1.90  |
| ▶ 2.5    | 3     | 15, 25, 40                   | ½, 1, 1½             |         |        | 12          | 15     | 0.042   | 0.16   | 0.29   | 0.54   | 0.80   | 1.07   | 1.33   | 1.60   | 1.86   | 2.1    | 2.4    | 2.7   | 2.9   |
| ▶ 4      | 5     | 15, 25, 40, 50, 80           | ½, 1, 1½, 2, 3       |         |        | 24          | 15     | 0.040   | 0.12   | 0.32   | 0.79   | 1.24   | 1.69   | 2.1    | 2.6    | 3.0    | 3.5    | 3.9    | 4.4   | 4.9   |
| ▶ 6.3    | 7.5   | 25, 40, 50, 80               | 1, 1½, 2, 3          |         |        | 24          | 15     | 0.097   | 0.31   | 0.66   | 1.35   | 2.0    | 2.7    | 3.4    | 4.1    | 4.8    | 5.5    | 6.2    | 6.9   | 7.6   |
| ▶ 10     | 12    | 25, 40, 50, 80               | 1, 1½, 2, 3          |         |        | 24          | 15     | 0.16  | 0.61   | 1.12   | 2.2    | 3.3    | 4.4    | 5.5    | 6.6    | 7.7    | 8.8    | 9.9    | 11.0  | 12.1  |
| ▶ 16     | 20    | 40, 50, 80                   | 1½, 2, 3             |         |        | 31          | 15     | 0.19  | 0.95   | 1.79   | 3.5    | 5.3    | 7.0    | 8.8    | 10.5   | 12.3   | 14.0   | 15.8   | 17.5  | 19.3  |
| ▶ 25     | 30    | 40, 50, 80, 100              | 1½, 2, 3, 4          |         |        | 38          | 15     | 0.32  | 0.81   | 1.53   | 4.0    | 6.5    | 9.0    | 11.5   | 14.1   | 16.6   | 19.1   | 21.6   | 24.2  | 26.7  |
| ▶ 40     | 47    | 50, 80, 100                  | 2, 3, 4              |         |        | 50          | 30     | 0.54  | 1.49   | 3.2    | 7.8    | 12.1   | 16.5   | 20.8   | 25.1   | 29.4   | 33.8   | 38.1   | 42.4  | 46.8  |
| ▶ 63     | 75    | 80, 100, 150                 | 3, 4, 6              |         |        | 63          | 30     | 1.02  | 1.75   | 4.1    | 11.1   | 18.2   | 25.2   | 32.3   | 39.4   | 46.4   | 53.5   | 60.5   | 67.6  | 74.7  |
| ▶ 100    | 120   | 80, 100, 150, 200, 250       | 3, 4, 6, 8, 10       |         |        | 80          | 30     | 0.74  | 2.3    | 6.3    | 17.3   | 28.3   | 39.2   | 50.1   | 61.0   | 72.0   | 82.9   | 93.8   | 104.8 | 115.7 |
| ▶ 160    | 190   | 100, 150, 200, 250, 300      | 4, 6, 8, 10, 12      |         |        | 100         | 30     | 1.9   | 4.0    | 10.5   | 25.3   | 41.0   | 56.6   | 72.3   | 88.0   | 103.7  | 119.3  | 135.0  | 150.7 | 164.9 |
| ▶ 250    | 290   | 150, 200, 250, 300           | 6, 8, 10, 12         |         |        | 125         | 60     | 3.5   | 6.3    | 17.6   | 46.4   | 75.0   | 103.5  | 132.1  | 160.7  | 189.3  | 217.8  | 246.4  | 275.0 | 303.5 |
| ▶ 360    | 420   | 150, 200, 250, 300, 350, 399 | 6, 8, 10, 12, 14, 16 |         |        | 150         | 60     | 4.3   | 12.3   | 31.3   | 65.1   | 101.2  | 135.3  | 169.4  | 203.6  | 237.7  | 271.8  | 305.9  | 340.0 | 362.7 |
| ▶ 630    | 735   | 200, 250, 300, 350, 400      | 8, 10, 12, 14, 16    |         |        | 200         | 60     | 10.1  | 29.0   | 58.2   | 120.8  | 182.2  | 243.6  | 305.0  | 366.4  | 427.8  | 489.2  | 550.6  | 612.0 | 652.8 |
| ▶ 1000   | 1150  | 250, 300, 350, 400, 500      | 10, 12, 14, 16, 20   | 250     | 120    | 15.0        | 27.7   | 73.3  | 182.8  | 295.4  | 407.9  | 520.5  | 633.1  | 745.7  | 858.2  | 970.8  | 1083.4 | 1196.0 |       |       |
| ▶ 1500   | 1730  | 300, 350, 400, 500           | 12, 14, 16, 20       | 300     | 120    | 22.8        | 72.2   | 145.8   | 308.7  | 465.6  | 622.5  | 779.4  | 936.3  | 1093.2 | 1250.2 | 1407.1 | 1564.0 | 1679.2 |       |       |
| ▶ 2000   | 2300  | 350, 400, 500                | 14, 16, 20           | 350     | 120    | 30.2        | 59.7   | 134.3   | 324.7  | 524.7  | 724.7  | 924.8  | 1124.8 | 1324.8 | 1524.8 | 1724.8 | 1924.8 | 2124.8 |       |       |
| ▶ 2500   | 2900  | 400, 500                     | 16, 20               | 400     | 120    | 36.6        | 114.3  | 229.4   | 476.0  | 718.0  | 959.9  | 1201.9 | 1443.8 | 1685.7 | 1927.7 | 2169.6 | 2411.6 | 2589.6 |       |       |
| ▶ 4000   | 4700  | 500                          | 20                   | 500     | 120    | 58.8        | 183.8  | 368.7   | 765.1  | 1153.9 | 1542.8 | 1931.6 | 2320.5 | 2709.4 | 3098.2 | 3487.1 | 3875.9 | 4151.2 |       |       |

**Table 3251.3:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: Standard plug with flow divider St I, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                           | NPS                  | NR   | CH               | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $K_v$ coefficient) |       |       |       |       |       |       |       |        |        |        |        |        |
|----------|-------|------------------------------|----------------------|------|------------------|----------------|--------|---|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|
|          |       |                              |                      |      |                  |                |        | 0   | 5     | 10    | 20    | 30    | 40    | 50    | 60    | 70     | 80     | 90     | 100    | 110    |
| ▶ 1.45   | 1.7   | 15, 25, 40                   | ½, 1, 1½             | St I | Equal percentage | 12             | 15     | 0.031   | 0.039 | 0.049 | 0.076 | 0.11  | 0.17  | 0.23  | 0.34  | 0.48   | 0.72   | 1.08   | 1.74   | 2.8    |
| ▶ 2.2    | 2.6   | 15, 25, 40                   | ½, 1, 1½             |      |                  | 12             | 15     | 0.051   | 0.060 | 0.074 | 0.11  | 0.16  | 0.25  | 0.37  | 0.55  | 0.80   | 1.18   | 1.77   | 2.5    | 3.5    |
| ▶ 3.6    | 4.2   | 15, 25, 40, 50, 80           | ½, 1, 1½, 2, 3       |      |                  | 24             | 15     | 0.078   | 0.093 | 0.11  | 0.17  | 0.25  | 0.35  | 0.50  | 0.70  | 1.06   | 1.64   | 2.6    | 4.3    | 6.3    |
| ▶ 5.7    | 7     | 25, 40, 50, 80               | 1, 1½, 2, 3          |      |                  | 24             | 15     | 0.14  | 0.18  | 0.22  | 0.33  | 0.49  | 0.69  | 0.99  | 1.45  | 2.2    | 3.2    | 4.7    | 6.6    | 8.6    |
| ▶ 9      | 10.5  | 25, 40, 50, 80               | 1, 1½, 2, 3          |      |                  | 24             | 15     | 0.21  | 0.28  | 0.36  | 0.56  | 0.81  | 1.13  | 1.54  | 2.2   | 3.1    | 4.5    | 6.6    | 9.3    | 10.6   |
| ▶ 14.5   | 17    | 40, 50, 80                   | 1½, 2, 3             |      |                  | 31             | 15     | 0.34  | 0.45  | 0.56  | 0.87  | 1.27  | 1.83  | 2.6   | 3.8   | 6.0    | 9.7    | 13.4   | 16.3   | 18.5   |
| ▶ 22     | 26    | 40, 50, 80, 100              | 1½, 2, 3, 4          |      |                  | 38             | 15     | 0.40  | 0.53  | 0.66  | 0.97  | 1.44  | 2.2   | 3.9   | 6.9   | 11.0   | 15.0   | 18.8   | 22.2   | 24.8   |
| ▶ 36     | 42    | 50, 80, 100                  | 2, 3, 4              |      |                  | 50             | 30     | 0.63  | 0.85  | 1.15  | 1.79  | 2.6   | 3.7   | 5.5   | 8.4   | 12.4   | 18.5   | 26.6   | 35.4   | 42.3   |
| ▶ 57     | 67    | 80, 100, 150                 | 3, 4, 6              |      |                  | 63             | 30     | 1.2   | 1.3   | 1.5   | 2.2   | 3.4   | 5.1   | 7.5   | 11.9  | 18.1   | 28.0   | 40.3   | 52.6   | 59.9   |
| ▶ 90     | 105   | 80, 100, 150, 200, 250       | 3, 4, 6, 8, 10       |      |                  | 80             | 30     | 1.4   | 1.7   | 2.1   | 3.5   | 5.7   | 9.3   | 14.7  | 23.5  | 36.4   | 54.6   | 70.6   | 81.8   | 90.9   |
| ▶ 144    | 170   | 100, 150, 200, 250, 300      | 4, 6, 8, 10, 12      |      |                  | 100            | 30     | 2.6   | 3.5   | 4.8   | 7.6   | 11.4  | 16.9  | 28.7  | 47.7  | 69.8   | 91.5   | 113.9  | 132.4  | 147.7  |
| ▶ 225    | 265   | 150, 200, 250, 300           | 6, 8, 10, 12         |      |                  | 125            | 60     | 4.1   | 5.6   | 7.2   | 11.8  | 18.2  | 26.9  | 38.3  | 54.7  | 85.3   | 137.3  | 179.0  | 206.7  | 225.6  |
| ▶ 320    | 375   | 150, 200, 250, 300, 350, 400 | 6, 8, 10, 12, 14, 16 |      |                  | 150            | 60     | 5.8   | 7.5   | 10.3  | 16.1  | 24.1  | 35.4  | 51.5  | 81.8  | 137.1  | 208.8  | 271.4  | 318.1  | 348.3  |
| ▶ 560    | 650   | 200, 250, 300, 350, 400      | 8, 10, 12, 14, 16    |      |                  | 200            | 60     | 9.4   | 14.9  | 20.0  | 33.8  | 66.8  | 122.3 | 207.1 | 304.7 | 390.1  | 463.2  | 522.0  | 560.0  | 581.8  |
| ▶ 900    | 1040  | 250, 300, 350, 400, 500      | 10, 12, 14, 16, 20   |      |                  | 250            | 120    | 15.5  | 21.7  | 30.5  | 51.3  | 79.4  | 118.3 | 177.8 | 260.4 | 390.3  | 585.2  | 793.2  | 988.3  | 1080.4 |
| ▶ 1350   | 1560  | 300, 350, 400, 500           | 12, 14, 16, 20       |      |                  | 300            | 120    | 20.1  | 31.0  | 43.7  | 73.4  | 113.5 | 169.2 | 254.3 | 372.4 | 558.1  | 836.9  | 1134.3 | 1413.3 | 1544.9 |
| ▶ 1800   | 2080  | 350, 400, 500                | 14, 16, 20           |      |                  | 350            | 120    | 27.8  | 39.1  | 55.0  | 92.4  | 142.9 | 213.0 | 320.1 | 468.7 | 702.5  | 1053.4 | 1427.8 | 1779.0 | 1944.6 |
| ▶ 2250   | 2600  | 400, 500                     | 16, 20               |      |                  | 400            | 120    | 35.1  | 49.3  | 69.3  | 116.5 | 180.2 | 268.6 | 403.6 | 591.0 | 885.7  | 1328.2 | 1800.2 | 2243.0 | 2451.9 |
| ▶ 3600   | 4200  | 500                          | 20                   |      |                  | 500            | 120    | 54.1  | 76.0  | 106.9 | 179.6 | 277.9 | 414.2 | 622.4 | 911.5 | 1366.0 | 2048.3 | 2776.3 | 3459.1 | 3781.2 |

**Table 3251.4:**  $K_v$  coefficients (m<sup>3</sup>/h) for Type 3251 Globe Valve: Standard plug with flow divider St I, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                           | NPS                  | NR   | CH     | Seat Ø [mm] | Travel | Travel in % · Flow coefficient (KV coefficient) |       |       |       |        |        |        |        |        |        |        |        |        |
|----------|-------|------------------------------|----------------------|------|--------|-------------|--------|---|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
|          |       |                              |                      |      |        |             |        | 0   | 5     | 10    | 20    | 30     | 40     | 50     | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 1.45   | 1.7   | 15, 25, 40                   | ½, 1, 1½             | St I | Linear | 12          | 15     | 0.035   | 0.11  | 0.19  | 0.35  | 0.52   | 0.69   | 0.86   | 1.03   | 1.20   | 1.37   | 1.54   | 1.71   | 1.9    |
| ▶ 2.2    | 2.6   | 15, 25, 40                   | ½, 1, 1½             |      |        | 12          | 15     | 0.042   | 0.16  | 0.29  | 0.53  | 0.80   | 1.06   | 1.32   | 1.58   | 1.85   | 2.1    | 2.4    | 2.6    | 2.9    |
| ▶ 3.6    | 4.2   | 15, 25, 40, 50, 80           | ½, 1, 1½, 2, 3       |      |        | 24          | 15     | 0.040   | 0.12  | 0.32  | 0.78  | 1.23   | 1.68   | 2.1    | 2.6    | 3.0    | 3.5    | 3.9    | 4.4    | 4.8    |
| ▶ 5.7    | 7     | 25, 40, 50, 80               | 1, 1½, 2, 3          |      |        | 24          | 15     | 0.097   | 0.31  | 0.66  | 1.34  | 2.0    | 2.7    | 3.4    | 4.1    | 4.8    | 5.5    | 6.2    | 6.8    | 7.5    |
| ▶ 9      | 10.5  | 25, 40, 50, 80               | 1, 1½, 2, 3          |      |        | 24          | 15     | 0.16  | 0.61  | 1.12  | 2.2   | 3.3    | 4.4    | 5.5    | 6.5    | 7.6    | 8.7    | 9.8    | 10.9   | 12.0   |
| ▶ 14.5   | 17    | 40, 50, 80                   | 1½, 2, 3             |      |        | 31          | 15     | 0.19  | 0.95  | 1.79  | 3.5   | 5.2    | 7.0    | 8.7    | 10.4   | 12.1   | 13.9   | 15.6   | 17.3   | 19.1   |
| ▶ 22     | 26    | 40, 50, 80, 100              | 1½, 2, 3, 4          |      |        | 38          | 15     | 0.32  | 0.81  | 1.53  | 3.6   | 5.9    | 8.2    | 10.5   | 12.8   | 15.1   | 17.4   | 19.7   | 22.0   | 24.3   |
| ▶ 36     | 42    | 50, 80, 100                  | 2, 3, 4              |      |        | 50          | 30     | 0.54  | 1.49  | 3.2   | 7.3   | 11.3   | 15.3   | 19.3   | 23.4   | 27.4   | 31.4   | 35.4   | 39.5   | 43.5   |
| ▶ 57     | 67    | 80, 100, 150                 | 3, 4, 6              |      |        | 63          | 30     | 1.02  | 1.75  | 4.1   | 9.8   | 16.0   | 22.2   | 28.4   | 34.6   | 40.8   | 47.1   | 53.3   | 59.5   | 65.7   |
| ▶ 90     | 105   | 80, 100, 150, 200, 250       | 3, 4, 6, 8, 10       |      |        | 80          | 30     | 0.74  | 2.3   | 5.6   | 14.4  | 23.5   | 32.5   | 41.6   | 50.7   | 59.7   | 68.8   | 77.9   | 86.9   | 96.0   |
| ▶ 144    | 170   | 100, 150, 200, 250, 300      | 4, 6, 8, 10, 12      |      |        | 100         | 30     | 1.91  | 4.0   | 9.9   | 22.8  | 36.9   | 51.0   | 65.1   | 79.2   | 93.3   | 107.4  | 121.5  | 135.6  | 148.4  |
| ▶ 225    | 265   | 150, 200, 250, 300           | 6, 8, 10, 12         |      |        | 125         | 60     | 3.54  | 6.32  | 15.50 | 37.11 | 59.97  | 82.83  | 105.69 | 128.5  | 151.4  | 174.3  | 197.1  | 220.0  | 242.8  |
| ▶ 320    | 375   | 150, 200, 250, 300, 350, 400 | 6, 8, 10, 12, 14, 16 |      |        | 150         | 60     | 4.3   | 12.3  | 28.8  | 59.9  | 93.1   | 124.5  | 155.9  | 187.3  | 218.6  | 250.0  | 281.4  | 312.8  | 333.6  |
| ▶ 560    | 650   | 200, 250, 300, 350, 400      | 8, 10, 12, 14, 16    |      |        | 200         | 60     | 10.1  | 29.0  | 55.8  | 112.3 | 169.4  | 226.5  | 283.6  | 340.7  | 397.8  | 454.9  | 512.0  | 569.2  | 607.1  |
| ▶ 900    | 1040  | 250, 300, 350, 400, 500      | 10, 12, 14, 16, 20   |      |        | 250         | 120    | 15.0  | 27.7  | 69.3  | 166.3 | 268.8  | 371.2  | 473.7  | 576.1  | 678.5  | 781.0  | 883.4  | 985.9  | 1088.3 |
| ▶ 1350   | 1560  | 300, 350, 400, 500           | 12, 14, 16, 20       |      |        | 300         | 120    | 22.8  | 72.2  | 138.8 | 284.0 | 428.4  | 572.7  | 717.1  | 861.4  | 1005.8 | 1150.1 | 1294.5 | 1438.9 | 1544.9 |
| ▶ 1800   | 2080  | 350, 400, 500                | 14, 16, 20           |      |        | 350         | 120    | 30.2  | 59.7  | 127.8 | 298.8 | 482.8  | 666.8  | 850.8  | 1034.8 | 1218.8 | 1402.8 | 1586.8 | 1770.8 | 1954.8 |
| ▶ 2250   | 2600  | 400, 500                     | 16, 20               |      |        | 400         | 120    | 36.6  | 114.3 | 218.4 | 437.9 | 660.5  | 883.1  | 1105.7 | 1328.3 | 1550.9 | 1773.5 | 1996.1 | 2218.7 | 2382.4 |
| ▶ 3600   | 4200  | 500                          | 20                   |      |        | 500         | 120    | 58.8  | 183.8 | 351.0 | 703.9 | 1061.6 | 1419.4 | 1777.1 | 2134.9 | 2492.6 | 2850.4 | 3208.1 | 3565.9 | 3819.1 |

**Table 3251.5:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: Standard plug with flow divider St II, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                           | NPS                  | NR    | CH               | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $K_v$ coefficient) |       |       |       |       |       |       |       |       |        |        |        |        |
|----------|-------|------------------------------|----------------------|-------|------------------|----------------|--------|---|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|
|          |       |                              |                      |       |                  |                |        | 0   | 5     | 10    | 20    | 30    | 40    | 50    | 60    | 70    | 80     | 90     | 100    | 110    |
| ▶ 3.2    | 3.7   | 50, 80                       | 2, 3                 | St II | Equal percentage | 24             | 15     | 0.078   | 0.093 | 0.114 | 0.170 | 0.25  | 0.35  | 0.50  | 0.70  | 1.06  | 1.63   | 2.60   | 4.24   | 6.3    |
| ▶ 5      | 6     | 50, 80                       | 2, 3                 |       |                  | 24             | 15     | 0.14  | 0.18  | 0.22  | 0.33  | 0.49  | 0.69  | 0.99  | 1.45  | 2.2   | 3.1    | 4.6    | 6.6    | 8.5    |
| ▶ 8      | 9.5   | 50, 80                       | 2, 3                 |       |                  | 24             | 15     | 0.21  | 0.28  | 0.36  | 0.56  | 0.81  | 1.13  | 1.54  | 2.2   | 3.1   | 4.4    | 6.5    | 9.2    | 10.5   |
| ▶ 13     | 15    | 50, 80                       | 2, 3                 |       |                  | 31             | 15     | 0.34  | 0.45  | 0.56  | 0.87  | 1.27  | 1.83  | 2.6   | 3.8   | 6.0   | 9.7    | 13.3   | 16.2   | 18.3   |
| ▶ 20     | 23    | 50, 80, 100                  | 2, 3, 4              |       |                  | 38             | 15     | 0.40  | 0.53  | 0.66  | 0.97  | 1.44  | 2.2   | 3.9   | 6.9   | 10.9  | 14.9   | 18.7   | 22.0   | 24.5   |
| ▶ 32     | 37    | 50, 80, 100                  | 2, 3, 4              |       |                  | 50             | 30     | 0.63  | 0.85  | 1.15  | 1.79  | 2.6   | 3.7   | 5.5   | 8.4   | 12.4  | 18.4   | 26.4   | 35.0   | 41.8   |
| ▶ 50     | 60    | 80, 100, 150                 | 3, 4, 6              |       |                  | 63             | 30     | 1.2   | 1.3   | 1.5   | 2.2   | 3.4   | 5.1   | 7.5   | 11.9  | 18.1  | 27.8   | 40.0   | 52.0   | 59.2   |
| ▶ 80     | 95    | 80, 100, 150, 200, 250       | 3, 4, 6, 8, 10       |       |                  | 80             | 30     | 1.4   | 1.7   | 2.1   | 3.5   | 5.7   | 9.3   | 14.7  | 23.0  | 36.5  | 53.5   | 67.7   | 76.9   | 82.8   |
| ▶ 125    | 145   | 100, 150, 200, 250, 300      | 4, 6, 8, 10, 12      |       |                  | 100            | 30     | 2.6   | 3.5   | 4.8   | 7.6   | 11.4  | 16.9  | 28.7  | 46.9  | 69.6  | 88.6   | 107.4  | 121.6  | 131.4  |
| ▶ 200    | 235   | 150, 200, 250, 300           | 6, 8, 10, 12         |       |                  | 125            | 60     | 4.1   | 5.6   | 7.2   | 11.8  | 18.2  | 26.9  | 38.3  | 54.4  | 84.4  | 133.5  | 171.0  | 193.7  | 205.7  |
| ▶ 290    | 335   | 150, 200, 250, 300, 350, 400 | 6, 8, 10, 12, 14, 16 |       |                  | 150            | 60     | 5.8   | 7.5   | 10.3  | 16.1  | 24.1  | 35.4  | 51.5  | 80.5  | 135.9 | 200.9  | 254.1  | 290.5  | 311.6  |
| ▶ 500    | 580   | 200, 250, 300, 350, 400      | 8, 10, 12, 14, 16    |       |                  | 200            | 60     | 9.4   | 14.9  | 20.0  | 31.2  | 61.8  | 113.1 | 191.5 | 281.8 | 360.7 | 428.3  | 482.7  | 517.9  | 538.0  |
| ▶ 800    | 950   | 250, 300, 350, 400, 500      | 10, 12, 14, 16, 20   |       |                  | 250            | 120    | 15.5  | 21.7  | 30.5  | 51.3  | 79.4  | 118.3 | 177.8 | 256.2 | 387.1 | 563.2  | 742.6  | 902.4  | 966.6  |
| ▶ 1200   | 1400  | 300, 350, 400, 500           | 12, 14, 16, 20       |       |                  | 300            | 120    | 20.1  | 31.0  | 43.7  | 73.4  | 113.5 | 169.2 | 254.3 | 366.4 | 553.5 | 805.4  | 1061.9 | 1290.4 | 1382.3 |
| ▶ 1600   | 1860  | 350, 400, 500                | 14, 16, 20           |       |                  | 350            | 120    | 27.8  | 39.1  | 55.0  | 92.4  | 142.9 | 213.0 | 320.1 | 461.2 | 696.7 | 1013.8 | 1336.7 | 1624.3 | 1739.9 |
| ▶ 2000   | 2300  | 400, 500                     | 16, 20               |       |                  | 400            | 120    | 35.1  | 49.3  | 69.3  | 116.5 | 180.2 | 268.6 | 403.6 | 581.6 | 878.5 | 1278.2 | 1685.3 | 2047.9 | 2193.8 |



**Table 3251.6:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: Standard plug with flow divider St II, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                           | NPS                  | NR    | CH     | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $K_v$ coefficient) |       |       |       |       |       |        |        |        |        |        |        |        |
|----------|-------|------------------------------|----------------------|-------|--------|----------------|--------|---|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|
|          |       |                              |                      |       |        |                |        | 0   | 5     | 10    | 20    | 30    | 40    | 50     | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 3.2    | 3.7   | 50, 80                       | 2, 3                 | St II | Linear | 24             | 15     | 0.040   | 0.123 | 0.324 | 0.775 | 1.22  | 1.66  | 2.10   | 2.54   | 2.99   | 3.43   | 3.87   | 4.31   | 4.8    |
| ▶ 5      | 6     | 50, 80                       | 2, 3                 |       |        | 24             | 15     | 0.10  | 0.31  | 0.66  | 1.32  | 2.01  | 2.69  | 3.37   | 4.05   | 4.7    | 5.4    | 6.1    | 6.8    | 7.5    |
| ▶ 8      | 9.5   | 50, 80                       | 2, 3                 |       |        | 24             | 15     | 0.16  | 0.61  | 1.12  | 2.17  | 3.25  | 4.32  | 5.40   | 6.5    | 7.5    | 8.6    | 9.7    | 10.8   | 11.8   |
| ▶ 13     | 15    | 50, 80                       | 2, 3                 |       |        | 31             | 15     | 0.19  | 0.95  | 1.79  | 3.47  | 5.18  | 6.89  | 8.6    | 10.3   | 12.0   | 13.7   | 15.4   | 17.2   | 18.9   |
| ▶ 20     | 23    | 50, 80, 100                  | 2, 3, 4              |       |        | 38             | 15     | 0.32  | 0.81  | 1.53  | 3.57  | 5.84  | 8.1   | 10.4   | 12.7   | 14.9   | 17.2   | 19.5   | 21.8   | 24.0   |
| ▶ 32     | 37    | 50, 80, 100                  | 2, 3, 4              |       |        | 50             | 30     | 0.54  | 1.49  | 3.24  | 7.18  | 11.2  | 15.1  | 19.1   | 23.1   | 27.1   | 31.1   | 35.0   | 39.0   | 43.0   |
| ▶ 50     | 60    | 80, 100, 150                 | 3, 4, 6              |       |        | 63             | 30     | 1.0   | 1.8   | 4.1   | 9.7   | 15.8  | 22.0  | 28.1   | 34.2   | 40.4   | 46.5   | 52.7   | 58.8   | 65.0   |
| ▶ 80     | 95    | 80, 100, 150, 200, 250       | 3, 4, 6, 8, 10       |       |        | 80             | 30     | 0.7   | 2.3   | 5.4   | 13.5  | 22.0  | 30.6  | 39.1   | 47.6   | 56.1   | 64.7   | 73.2   | 81.7   | 90.2   |
| ▶ 125    | 145   | 100, 150, 200, 250, 300      | 4, 6, 8, 10, 12      |       |        | 100            | 30     | 1.9   | 4.0   | 9.4   | 20.7  | 33.6  | 46.4  | 59.3   | 72.2   | 85.0   | 97.9   | 110.7  | 123.6  | 135.2  |
| ▶ 200    | 235   | 150, 200, 250, 300           | 6, 8, 10, 12         |       |        | 125            | 60     | 3.5   | 6.3   | 14.9  | 34.3  | 55.5  | 76.6  | 97.8   | 118.9  | 140.0  | 161.2  | 182.3  | 203.5  | 224.6  |
| ▶ 290    | 335   | 150, 200, 250, 300, 350, 400 | 6, 8, 10, 12, 14, 16 |       |        | 150            | 60     | 4.3   | 12.3  | 26.3  | 54.7  | 85.0  | 113.7 | 142.3  | 171.0  | 199.6  | 228.3  | 256.9  | 285.6  | 304.6  |
| ▶ 500    | 580   | 200, 250, 300, 350, 400      | 8, 10, 12, 14, 16    |       |        | 200            | 60     | 10.1  | 29.0  | 53.3  | 103.9 | 156.7 | 209.5 | 262.3  | 315.1  | 367.9  | 420.7  | 473.5  | 526.3  | 561.4  |
| ▶ 800    | 950   | 250, 300, 350, 400, 500      | 10, 12, 14, 16, 20   |       |        | 250            | 120    | 15.0  | 27.7  | 65.4  | 149.9 | 242.2 | 334.5 | 426.8  | 519.1  | 611.4  | 703.7  | 796.1  | 888.4  | 980.7  |
| ▶ 1200   | 1400  | 300, 350, 400, 500           | 12, 14, 16, 20       |       |        | 300            | 120    | 22.8  | 72.2  | 131.8 | 259.3 | 391.1 | 522.9 | 654.7  | 786.5  | 918.3  | 1050.1 | 1181.9 | 1313.7 | 1410.5 |
| ▶ 1600   | 1860  | 350, 400, 500                | 14, 16, 20           |       |        | 350            | 120    | 30.2  | 59.7  | 121.4 | 272.8 | 440.8 | 608.8 | 776.8  | 944.8  | 1112.8 | 1280.8 | 1448.8 | 1616.8 | 1784.8 |
| ▶ 2000   | 2300  | 400, 500                     | 16, 20               |       |        | 400            | 120    | 36.6  | 114.3 | 207.4 | 399.9 | 603.1 | 806.3 | 1009.6 | 1212.8 | 1416.0 | 1619.3 | 1822.5 | 2025.7 | 2175.2 |

**Table 3251.7:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: Standard plug with flow divider St III, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                      | NPS               | NR     | CH               | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $K_v$ coefficient) |       |      |       |       |       |       |       |       |        |        |        |        |
|----------|-------|-------------------------|-------------------|--------|------------------|----------------|--------|---|-------|------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|
|          |       |                         |                   |        |                  |                |        | 0   | 5     | 10   | 20    | 30    | 40    | 50    | 60    | 70    | 80     | 90     | 100    | 110    |
| ▶ 3      | 3.5   | 50, 80                  | 2, 3              | St III | Equal percentage | 24             | 15     | 0.078   | 0.093 | 0.11 | 0.17  | 0.25  | 0.35  | 0.50  | 0.70  | 1.06  | 1.62   | 2.6    | 4.2    | 6.2    |
| ▶ 4.8    | 5.6   | 50, 80                  | 2, 3              |        |                  | 24             | 15     | 0.14  | 0.18  | 0.22 | 0.33  | 0.49  | 0.69  | 0.99  | 1.45  | 2.2   | 3.1    | 4.6    | 6.5    | 8.4    |
| ▶ 7.5    | 9     | 50, 80                  | 2, 3              |        |                  | 24             | 15     | 0.21  | 0.28  | 0.36 | 0.56  | 0.81  | 1.13  | 1.54  | 2.2   | 3.1   | 4.4    | 6.5    | 9.1    | 10.4   |
| ▶ 12     | 14    | 80                      | 3                 |        |                  | 31             | 15     | 0.34  | 0.45  | 0.56 | 0.87  | 1.27  | 1.83  | 2.6   | 3.8   | 6.0   | 9.6    | 13.2   | 16.0   | 18.1   |
| ▶ 20     | 23    | 80, 100                 | 3, 4              |        |                  | 38             | 15     | 0.40  | 0.53  | 0.66 | 0.97  | 1.44  | 2.2   | 3.9   | 6.9   | 10.9  | 14.8   | 18.5   | 21.8   | 24.2   |
| ▶ 30     | 35    | 80, 100                 | 3, 4              |        |                  | 50             | 30     | 0.63  | 0.85  | 1.15 | 1.79  | 2.6   | 3.7   | 5.5   | 8.4   | 12.3  | 18.3   | 26.2   | 34.6   | 41.3   |
| ▶ 47     | 55    | 100, 150                | 4, 6              |        |                  | 63             | 30     | 1.20  | 1.34  | 1.5  | 2.2   | 3.4   | 5.1   | 7.5   | 11.9  | 18.0  | 27.7   | 39.6   | 51.4   | 58.4   |
| ▶ 75     | 90    | 150, 200, 250           | 6, 8, 10          |        |                  | 80             | 30     | 1.4   | 1.7   | 2.1  | 3.5   | 5.7   | 9.3   | 14.7  | 22.9  | 36.2  | 52.3   | 65.3   | 73.2   | 78.0   |
| ▶ 120    | 140   | 150, 200, 250, 300      | 6, 8, 10, 12      |        |                  | 100            | 30     | 2.6   | 3.5   | 4.8  | 7.6   | 11.4  | 16.9  | 28.7  | 46.5  | 68.4  | 84.7   | 100.0  | 109.7  | 116.2  |
| ▶ 190    | 220   | 150, 200, 250, 300      | 6, 8, 10, 12      |        |                  | 125            | 60     | 4.1   | 5.6   | 7.2  | 11.8  | 18.2  | 26.9  | 38.3  | 54.0  | 82.9  | 127.3  | 158.3  | 172.7  | 178.7  |
| ▶ 270    | 315   | 200, 250, 300, 350, 400 | 8, 10, 12, 14, 16 |        |                  | 150            | 60     | 5.8   | 7.5   | 10.3 | 16.1  | 24.1  | 35.4  | 51.5  | 80.0  | 134.0 | 193.3  | 238.9  | 266.3  | 280.9  |
| ▶ 480    | 560   | 250, 300, 350, 400      | 10, 12, 14, 16    |        |                  | 200            | 60     | 9.4   | 14.9  | 17.3 | 28.3  | 56.0  | 102.6 | 173.7 | 255.5 | 327.1 | 388.5  | 437.8  | 469.7  | 488.0  |
| ▶ 750    | 880   | 300, 350, 400, 500      | 12, 14, 16, 20    |        |                  | 250            | 120    | 15.5  | 21.7  | 30.5 | 51.3  | 79.4  | 118.3 | 177.8 | 252.6 | 375.9 | 520.3  | 654.0  | 752.0  | 792.9  |
| ▶ 1100   | 1280  | 350, 400, 500           | 14, 16, 20        |        |                  | 300            | 120    | 20.1  | 31.0  | 43.7 | 73.4  | 113.5 | 169.2 | 254.3 | 362.3 | 540.9 | 757.2  | 962.4  | 1121.4 | 1188.0 |
| ▶ 1500   | 1730  | 350, 400, 500           | 14, 16, 20        |        |                  | 350            | 120    | 27.8  | 39.1  | 55.0 | 92.4  | 142.9 | 213.0 | 320.1 | 456.6 | 682.4 | 958.7  | 1222.8 | 1430.9 | 1512.7 |
| ▶ 1900   | –     | 500                     | 20                |        |                  | 400            | 120    | 35.1  | 49.3  | 69.3 | 116.5 | 180.2 | 268.6 | 403.6 | 576.2 | 862.2 | 1215.7 | 1556.1 | 1828.5 | 1928.5 |

**Table 3251.8:**  $K_V$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: Standard plug with flow divider St III, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $K_{VS}$ | $C_V$ | DN                      | NPS               | NR     | CH     | Seat Ø [mm] | Travel | Travel in % · Flow coefficient ( $K_V$ coefficient) |       |       |       |       |       |       |        |        |        |        |        |        |
|----------|-------|-------------------------|-------------------|--------|--------|-------------|--------|---|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|
|          |       |                         |                   |        |        |             |        | 0   | 5     | 10    | 20    | 30    | 40    | 50    | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 3      | 3.5   | 50, 80                  | 2, 3              | St III | Linear | 24          | 15     | 0.040   | 0.12  | 0.32  | 0.77  | 1.20  | 1.64  | 2.1   | 2.5    | 3.0    | 3.4    | 3.8    | 4.3    | 4.7    |
| ▶ 4.8    | 5.6   | 50, 80                  | 2, 3              |        |        | 24          | 15     | 0.097   | 0.31  | 0.66  | 1.31  | 2.0   | 2.7   | 3.3   | 4.0    | 4.7    | 5.4    | 6.0    | 6.7    | 7.4    |
| ▶ 7.5    | 9     | 50, 80                  | 2, 3              |        |        | 24          | 15     | 0.16  | 0.61  | 1.12  | 2.2   | 3.2   | 4.3   | 5.3   | 6.4    | 7.5    | 8.5    | 9.6    | 10.7   | 11.7   |
| ▶ 12     | 14    | 80                      | 3                 |        |        | 31          | 15     | 0.19  | 0.95  | 1.79  | 3.4   | 5.1   | 6.8   | 8.5   | 10.2   | 11.9   | 13.6   | 15.3   | 17.0   | 18.7   |
| ▶ 20     | 23    | 80, 100                 | 3, 4              |        |        | 38          | 15     | 0.32  | 0.81  | 1.53  | 3.5   | 5.8   | 8.0   | 10.3  | 12.5   | 14.8   | 17.0   | 19.3   | 21.5   | 23.8   |
| ▶ 30     | 35    | 80, 100                 | 3, 4              |        |        | 50          | 30     | 0.54  | 1.49  | 3.2   | 7.1   | 11.0  | 15.0  | 18.9  | 22.9   | 26.8   | 30.7   | 34.7   | 38.6   | 42.5   |
| ▶ 47     | 55    | 100, 150                | 4, 6              |        |        | 63          | 30     | 1.02  | 1.75  | 4.1   | 9.6   | 15.6  | 21.7  | 27.8  | 33.8   | 39.9   | 46.0   | 52.1   | 58.1   | 64.2   |
| ▶ 75     | 90    | 150, 200, 250           | 6, 8, 10          |        |        | 80          | 30     | 0.74  | 2.3   | 5.3   | 12.8  | 20.9  | 29.0  | 37.1  | 45.2   | 53.3   | 61.3   | 69.4   | 77.5   | 85.6   |
| ▶ 120    | 140   | 150, 200, 250, 300      | 6, 8, 10, 12      |        |        | 100         | 30     | 1.91  | 4.0   | 8.9   | 19.0  | 30.7  | 42.5  | 54.2  | 66.0   | 77.7   | 89.5   | 101.3  | 113.0  | 123.7  |
| ▶ 190    | 220   | 150, 200, 250, 300      | 6, 8, 10, 12      |        |        | 125         | 60     | 3.5   | 6.3   | 14.1  | 31.1  | 50.2  | 69.4  | 88.5  | 107.7  | 126.8  | 145.9  | 165.1  | 184.2  | 203.4  |
| ▶ 270    | 315   | 200, 250, 300, 350, 400 | 8, 10, 12, 14, 16 |        |        | 150         | 60     | 4.3   | 12.3  | 24.1  | 50.1  | 77.9  | 104.2 | 130.5 | 156.7  | 183.0  | 209.3  | 235.5  | 261.8  | 279.2  |
| ▶ 480    | 560   | 250, 300, 350, 400      | 10, 12, 14, 16    |        |        | 200         | 60     | 10.1  | 29.0  | 49.8  | 91.8  | 138.5 | 185.1 | 231.8 | 278.5  | 325.1  | 371.8  | 418.4  | 465.1  | 496.1  |
| ▶ 750    | 880   | 300, 350, 400, 500      | 12, 14, 16, 20    |        |        | 250         | 120    | 15.0  | 27.7  | 60.1  | 127.9 | 206.7 | 285.5 | 364.4 | 443.2  | 522.0  | 600.8  | 679.6  | 758.4  | 837.2  |
| ▶ 1100   | 1280  | 350, 400, 500           | 14, 16, 20        |        |        | 300         | 120    | 22.8  | 72.2  | 120.4 | 219.2 | 330.6 | 442.0 | 553.4 | 664.8  | 776.2  | 887.6  | 999.0  | 1110.4 | 1192.2 |
| ▶ 1500   | 1730  | 350, 400, 500           | 14, 16, 20        |        |        | 350         | 120    | 30.2  | 59.7  | 113.3 | 240.3 | 388.3 | 536.3 | 684.3 | 832.3  | 980.3  | 1128.3 | 1276.3 | 1424.3 | 1572.4 |
| ▶ 1900   | -     | 500                     | 20                |        |        | 400         | 120    | 36.6  | 114.3 | 196.4 | 361.8 | 545.6 | 729.5 | 913.4 | 1097.3 | 1281.2 | 1465.0 | 1648.9 | 1832.8 | 1968.1 |

**Table 3251.9:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: AC-1 Trim with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN          | NPS     | NR   | CH               | Seat Ø [mm] | Travel | Travel in % · Flow coefficient ( $K_v$ coefficient) |      |      |      |      |      |      |       |       |       |       |       |       |
|----------|-------|-------------|---------|------|------------------|-------------|--------|---|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|
|          |       |             |         |      |                  |             |        | 0   | 5    | 10   | 20   | 30   | 40   | 50   | 60    | 70    | 80    | 90    | 100   | 110   |
| ▶ 22     | 26    | 50, 80, 100 | 2, 3, 4 | AC-1 | Equal percentage | 38          | 15     | 0.35  | 0.42 | 0.55 | 0.9  | 1.5  | 2.3  | 3.4  | 5.0   | 7.8   | 12.5  | 17.1  | 21.4  | 24.5  |
| ▶ 35     | 40    | 50, 80      | 2, 3    |      |                  | 50          | 30     | 0.57  | 0.65 | 0.82 | 1.4  | 2.4  | 3.7  | 5.7  | 8.4   | 13.0  | 23.0  | 30.9  | 36.0  | 39.8  |
| ▶ 38     | 45    | 100         | 4       |      |                  | 50          | 30     | 0.69  | 0.85 | 1.1  | 1.7  | 2.7  | 4.0  | 5.9  | 8.7   | 13.1  | 19.6  | 28.8  | 39.7  | 50.2  |
| ▶ 50     | 60    | 80          | 3       |      |                  | 63          | 30     | 0.92  | 1.1  | 1.4  | 2.3  | 3.6  | 5.3  | 7.8  | 11.5  | 17.3  | 25.7  | 37.9  | 51.1  | 63.7  |
| ▶ 55     | 65    | 100         | 4       |      |                  | 63          | 30     | 1.0   | 1.2  | 1.6  | 2.5  | 3.9  | 5.8  | 8.5  | 12.6  | 19.0  | 28.3  | 41.7  | 57.4  | 72.7  |
| ▶ 60     | 70    | 80          | 3       |      |                  | 80          | 30     | 1.2   | 1.4  | 1.7  | 2.8  | 4.3  | 6.3  | 9.4  | 14.0  | 20.7  | 32.2  | 51.4  | 65.3  | 75.3  |
| ▶ 70     | 80    | 80          | 3       |      |                  | 80          | 30     | 1.5   | 2.0  | 2.6  | 4.1  | 6.4  | 9.4  | 13.8 | 19.7  | 28.3  | 40.3  | 56.4  | 72.9  | 86.7  |
| ▶ 75     | 90    | 100         | 4       |      |                  | 80          | 30     | 1.4   | 1.7  | 2.1  | 3.4  | 5.3  | 7.9  | 11.7 | 17.2  | 25.9  | 38.6  | 56.9  | 76.7  | 95.5  |
| ▶ 75     | 90    | 100         | 4       |      |                  | 100         | 30     | 1.5   | 1.8  | 2.2  | 3.6  | 5.5  | 8.1  | 12.2 | 18.1  | 26.7  | 41.6  | 66.4  | 84.5  | 97.4  |
| ▶ 95     | 110   | 150         | 6       |      |                  | 80          | 30     | 1.7   | 2.1  | 2.7  | 4.3  | 6.7  | 10.1 | 14.8 | 21.8  | 32.8  | 48.9  | 72.1  | 99.1  | 125.5 |
| ▶ 100    | 120   | 100         | 4       |      |                  | 100         | 30     | 2.1   | 3.0  | 4.0  | 6.7  | 10.5 | 15.9 | 22.9 | 32.8  | 47.7  | 65.4  | 84.0  | 98.0  | 105.6 |
| ▶ 145    | 170   | 150         | 6       |      |                  | 100         | 30     | 2.6   | 3.2  | 4.1  | 6.6  | 10.3 | 15.3 | 22.5 | 33.3  | 50.0  | 74.7  | 110.0 | 148.3 | 184.6 |
| ▶ 155    | 180   | 200         | 8       |      |                  | 100         | 30     | 2.8   | 3.5  | 4.4  | 7.1  | 11.0 | 16.4 | 24.1 | 35.6  | 53.5  | 79.8  | 117.6 | 161.7 | 204.8 |
| ▶ 205    | 240   | 150         | 6       |      |                  | 125         | 60     | 3.6   | 4.4  | 5.5  | 8.9  | 13.9 | 20.6 | 30.3 | 44.8  | 67.3  | 100.4 | 147.9 | 199.5 | 248.3 |
| ▶ 205    | 240   | 150         | 6       |      |                  | 150         | 60     | 4.0   | 4.8  | 6.0  | 9.5  | 14.7 | 21.7 | 32.5 | 48.4  | 71.2  | 111.1 | 177.1 | 225.3 | 259.8 |
| ▶ 230    | 270   | 200         | 8       |      |                  | 125         | 60     | 4.2   | 5.1  | 6.5  | 10.5 | 16.3 | 24.3 | 35.7 | 52.8  | 79.4  | 118.4 | 174.5 | 240.0 | 303.9 |
| ▶ 250    | 290   | 150         | 6       |      |                  | 150         | 60     | 5.2   | 6.8  | 9.0  | 15.2 | 23.8 | 36.1 | 53.5 | 78.2  | 111.5 | 162.5 | 214.5 | 247.4 | 266.3 |
| ▶ 305    | 360   | 200         | 8       |      |                  | 150         | 60     | 5.6   | 6.8  | 8.6  | 13.9 | 21.7 | 32.3 | 47.4 | 70.1  | 105.3 | 157.0 | 228.7 | 318.3 | 402.8 |
| ▶ 360    | 420   | 200         | 8       |      |                  | 200         | 60     | 6.0   | 7.3  | 9.0  | 14.3 | 22.0 | 32.6 | 48.8 | 72.6  | 106.8 | 166.6 | 265.7 | 358.0 | 413.7 |
| ▶ 480    | 560   | 200         | 8       |      |                  | 200         | 60     | 10.2  | 12.3 | 16.0 | 25.6 | 39.8 | 60.2 | 89.3 | 136.6 | 219.5 | 315.3 | 395.5 | 453.2 | 496.3 |

**Table 3251.10:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: AC-2 Trim with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN  | NPS | NR   | CH               | Seat Ø [mm] | Travel | Travel in % · Flow coefficient ( $K_v$ coefficient) |     |     |     |     |      |      |      |      |      |      |      |      |
|----------|-------|-----|-----|------|------------------|-------------|--------|---|-----|-----|-----|-----|------|------|------|------|------|------|------|------|
|          |       |     |     |      |                  |             |        | 0   | 5   | 10  | 20  | 30  | 40   | 50   | 60   | 70   | 80   | 90   | 100  | 110  |
| ▶ 16     | 20    | 80  | 3   | AC-2 | Equal percentage | 80          | 30     | 1.6   | 1.8 | 2.0 | 2.6 | 3.8 | 5.6  | 7.7  | 10.2 | 13.0 | 15.4 | 16.7 | 17.4 | 17.8 |
| ▶ 22     | 26    | 80  | 3   |      |                  | 80          | 30     | 2.1   | 2.3 | 2.6 | 3.4 | 4.9 | 7.3  | 10.0 | 13.2 | 16.8 | 19.9 | 21.7 | 22.6 | 23.1 |
| ▶ 25     | 30    | 80  | 3   |      |                  | 80          | 30     | 1.6   | 1.9 | 2.4 | 3.7 | 5.7 | 8.5  | 11.6 | 15.5 | 19.7 | 23.3 | 25.3 | 26.4 | 27.0 |
| ▶ 30     | 35    | 80  | 3   |      |                  | 80          | 30     | 1.6   | 1.9 | 2.5 | 4.2 | 6.6 | 9.5  | 13.5 | 17.9 | 22.3 | 25.6 | 28.2 | 29.7 | 30.5 |
| ▶ 35     | 40    | 80  | 3   |      |                  | 80          | 30     | 1.9   | 2.1 | 2.6 | 4.4 | 6.8 | 10.0 | 14.2 | 19.2 | 24.3 | 28.6 | 31.9 | 34.1 | 35.3 |
| ▶ 35     | 40    | 100 | 4   |      |                  | 100         | 30     | 1.8   | 2.2 | 2.9 | 5.0 | 8.2 | 11.9 | 16.3 | 21.7 | 27.5 | 32.6 | 35.5 | 37.0 | 37.7 |
| ▶ 38     | 45    | 80  | 3   |      |                  | 80          | 30     | 1.7   | 2.0 | 2.5 | 4.1 | 6.6 | 9.7  | 14.0 | 19.4 | 25.4 | 31.3 | 35.5 | 38.0 | 39.2 |

| K <sub>Vs</sub> | C <sub>V</sub> | DN  | NPS | NR   | CH               | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient (K <sub>V</sub> coefficient) |      |      |      |      |       |       |       |       |       |       |       |       |
|-----------------|----------------|-----|-----|------|------------------|----------------|--------|---|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|
|                 |                |     |     |      |                  |                |        | 0   | 5    | 10   | 20   | 30   | 40    | 50    | 60    | 70    | 80    | 90    | 100   | 110   |
| ▶ 38            | 45             | 100 | 4   | AC-2 | Equal percentage | 100            | 30     | 2.6   | 3.0  | 3.7  | 5.8  | 8.9  | 12.9  | 17.7  | 23.5  | 29.9  | 35.4  | 38.5  | 40.1  | 41.0  |
| ▶ 43            | 50             | 80  | 3   |      |                  | 80             | 30     | 1.9   | 2.2  | 2.8  | 4.7  | 7.5  | 10.9  | 15.9  | 22.0  | 28.8  | 35.4  | 40.2  | 43.0  | 44.3  |
| ▶ 43            | 50             | 100 | 4   |      |                  | 100            | 30     | 4.0   | 4.5  | 5.2  | 7.1  | 10.0 | 14.6  | 20.0  | 26.6  | 33.8  | 40.0  | 43.6  | 45.4  | 46.4  |
| ▶ 45            | 55             | 100 | 4   |      |                  | 100            | 30     | 3.2   | 3.6  | 4.4  | 6.9  | 10.5 | 15.3  | 20.9  | 27.8  | 35.4  | 41.9  | 45.6  | 47.5  | 48.5  |
| ▶ 50            | 60             | 80  | 3   |      |                  | 80             | 30     | 1.6   | 1.9  | 2.4  | 4.2  | 7.0  | 10.3  | 14.9  | 21.2  | 28.6  | 37.3  | 44.6  | 49.3  | 52.0  |
| ▶ 50            | 60             | 100 | 4   |      |                  | 100            | 30     | 3.0   | 3.4  | 4.2  | 6.6  | 10.1 | 14.8  | 21.1  | 28.8  | 37.5  | 45.1  | 50.2  | 53.0  | 54.6  |
| ▶ 55            | 65             | 100 | 4   |      |                  | 100            | 30     | 3.4   | 3.8  | 4.4  | 6.1  | 9.1  | 13.7  | 19.6  | 27.0  | 36.4  | 45.2  | 51.5  | 55.5  | 58.0  |
| ▶ 60            | 70             | 100 | 4   |      |                  | 100            | 30     | 3.1   | 3.6  | 4.2  | 6.3  | 10.0 | 14.9  | 21.4  | 29.4  | 39.8  | 49.3  | 56.1  | 60.5  | 63.3  |
| ▶ 63            | 75             | 100 | 4   |      |                  | 100            | 30     | 2.1   | 2.8  | 3.7  | 6.5  | 10.5 | 15.6  | 22.5  | 30.9  | 41.7  | 51.8  | 59.0  | 63.6  | 66.4  |
| ▶ 72            | 85             | 100 | 4   |      |                  | 100            | 30     | 3.2   | 3.7  | 4.4  | 6.9  | 10.4 | 15.4  | 22.0  | 30.5  | 42.5  | 55.4  | 65.9  | 72.5  | 75.3  |
| ▶ 85            | 100            | 150 | 6   |      |                  | 150            | 60     | 4.6   | 5.3  | 6.6  | 10.8 | 16.8 | 24.7  | 35.0  | 47.4  | 61.4  | 74.2  | 82.0  | 85.9  | 87.8  |
| ▶ 95            | 110            | 150 | 6   |      |                  | 150            | 60     | 5.7   | 6.6  | 8.1  | 13.3 | 20.8 | 30.6  | 43.2  | 58.6  | 75.9  | 91.8  | 101.4 | 106.2 | 108.6 |
| ▶ 100           | 120            | 150 | 6   |      |                  | 150            | 60     | 4.5   | 5.5  | 7.0  | 11.9 | 18.5 | 27.7  | 39.4  | 54.2  | 71.9  | 88.1  | 97.0  | 101.8 | 104.2 |
| ▶ 110           | 130            | 150 | 6   |      |                  | 150            | 60     | 5.9   | 6.9  | 8.4  | 13.8 | 21.5 | 31.7  | 44.8  | 60.8  | 78.7  | 95.2  | 105.1 | 110.1 | 112.6 |
| ▶ 120           | 140            | 150 | 6   |      |                  | 150            | 60     | 6.4   | 7.5  | 9.2  | 15.0 | 23.5 | 34.5  | 48.9  | 66.3  | 85.8  | 103.7 | 114.6 | 120.1 | 122.7 |
| ▶ 130           | 150            | 150 | 6   |      |                  | 150            | 60     | 7.5   | 8.8  | 10.8 | 17.6 | 27.5 | 40.5  | 57.4  | 77.8  | 100.7 | 121.7 | 134.5 | 140.9 | 144.0 |
| ▶ 135           | 160            | 150 | 6   |      |                  | 150            | 60     | 6.1   | 7.4  | 9.4  | 16.1 | 24.9 | 37.5  | 53.2  | 73.2  | 97.0  | 118.9 | 131.0 | 136.1 | 138.5 |
| ▶ 135           | 160            | 200 | 8   |      |                  | 200            | 60     | 8.1   | 9.3  | 11.5 | 18.6 | 28.3 | 41.1  | 58.0  | 79.7  | 105.4 | 121.2 | 130.2 | 135.1 | 138.9 |
| ▶ 145           | 170            | 150 | 6   |      |                  | 150            | 60     | 6.0   | 7.6  | 9.6  | 15.6 | 24.3 | 36.0  | 52.4  | 72.5  | 96.5  | 121.9 | 137.6 | 145.6 | 149.7 |
| ▶ 145           | 170            | 200 | 8   |      |                  | 200            | 60     | 13.1  | 15.0 | 17.8 | 24.9 | 33.8 | 45.8  | 62.3  | 85.6  | 113.2 | 130.1 | 139.5 | 145.3 | 148.8 |
| ▶ 155           | 180            | 150 | 6   |      |                  | 150            | 60     | 6.5   | 8.1  | 10.2 | 16.7 | 26.0 | 38.5  | 56.0  | 77.5  | 103.1 | 130.4 | 147.1 | 153.7 | 156.4 |
| ▶ 155           | 180            | 200 | 8   |      |                  | 200            | 60     | 14.0  | 16.0 | 18.9 | 26.9 | 36.1 | 49.0  | 66.6  | 91.5  | 121.0 | 139.1 | 149.1 | 155.4 | 159.1 |
| ▶ 160           | 190            | 150 | 6   |      |                  | 150            | 60     | 6.7   | 8.4  | 10.6 | 17.2 | 26.9 | 39.7  | 57.8  | 80.0  | 106.5 | 134.6 | 151.8 | 160.7 | 165.2 |
| ▶ 160           | 190            | 200 | 8   |      |                  | 200            | 60     | 14.5  | 16.6 | 19.5 | 27.7 | 37.3 | 50.6  | 68.7  | 94.5  | 124.9 | 143.6 | 153.9 | 160.4 | 165.3 |
| ▶ 170           | 200            | 200 | 8   |      |                  | 200            | 60     | 15.4  | 17.6 | 20.8 | 29.5 | 39.6 | 53.7  | 73.0  | 100.4 | 132.7 | 152.6 | 162.9 | 168.8 | 173.8 |
| ▶ 180           | 210            | 150 | 6   |      |                  | 150            | 60     | 6.3   | 7.3  | 9.1  | 14.8 | 23.4 | 35.5  | 51.7  | 74.3  | 102.6 | 141.1 | 170.2 | 183.4 | 187.4 |
| ▶ 180           | 210            | 200 | 8   |      |                  | 200            | 60     | 10.9  | 12.4 | 15.4 | 24.8 | 37.7 | 54.8  | 77.3  | 106.3 | 140.5 | 161.6 | 172.4 | 178.3 | 183.2 |
| ▶ 190           | 220            | 200 | 8   |      |                  | 200            | 60     | 11.5  | 13.1 | 16.2 | 26.2 | 39.8 | 57.8  | 81.6  | 112.2 | 148.4 | 170.5 | 181.0 | 186.7 | 191.2 |
| ▶ 205           | 240            | 200 | 8   |      |                  | 200            | 60     | 10.4  | 12.3 | 15.3 | 24.1 | 36.8 | 53.8  | 76.8  | 108.4 | 151.0 | 181.1 | 195.7 | 203.3 | 208.1 |
| ▶ 220           | 255            | 200 | 8   |      |                  | 200            | 60     | 11.1  | 13.3 | 16.3 | 26.0 | 39.5 | 57.7  | 82.4  | 116.3 | 162.1 | 194.3 | 210.0 | 217.6 | 221.6 |
| ▶ 250           | 290            | 200 | 8   |      |                  | 200            | 60     | 10.3  | 12.3 | 15.4 | 24.9 | 38.1 | 56.6  | 81.6  | 118.1 | 174.2 | 216.8 | 240.4 | 251.4 | 257.4 |
| ▶ 260           | 305            | 200 | 8   |      |                  | 200            | 60     | 10.7  | 12.8 | 16.2 | 25.9 | 39.7 | 58.8  | 84.8  | 122.9 | 181.2 | 225.4 | 250.0 | 261.5 | 267.7 |
| ▶ 280           | 325            | 200 | 8   | 200  | 60               | 7.1            | 8.0    | 9.8   | 15.9 | 24.5 | 35.8 | 53.2 | 77.6  | 111.8 | 164.2 | 233.3 | 280.5 | 306.3 |       |       |
| ▶ 320           | 375            | 200 | 8   | 200  | 60               | 10.2           | 11.9   | 14.9  | 25.5 | 39.2 | 59.0 | 87.2 | 128.5 | 196.6 | 252.6 | 293.2 | 318.1 | 329.2 |       |       |

**Table 3251.11:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: AC-3 Trim with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN               | NPS        | NR   | CH               | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $K_v$ coefficient) |        |        |        |       |       |       |       |      |      |       |      |      |
|----------|-------|------------------|------------|------|------------------|----------------|--------|---|--------|--------|--------|-------|-------|-------|-------|------|------|-------|------|------|
|          |       |                  |            |      |                  |                |        | 0   | 5      | 10     | 20     | 30    | 40    | 50    | 60    | 70   | 80   | 90    | 100  | 110  |
| ▶ 0.4    | 0.5   | 25               | 1          | AC-3 | Equal percentage | 12             | 7,5    | 0.0021  | 0.0023 | 0.0027 | 0.0051 | 0.012 | 0.024 | 0.043 | 0.073 | 0.12 | 0.19 | 0.28  | 0.44 | 0.84 |
| ▶ 0.63   | 0.75  | 25, 40           | 1, 1½      |      |                  | 16             | 7,5    | 0.011   | 0.013  | 0.016  | 0.025  | 0.039 | 0.066 | 0.10  | 0.15  | 0.23 | 0.33 | 0.48  | 0.69 | 1.1  |
| ▶ 1      | 1.2   | 25, 40           | 1, 1½      |      |                  | 18             | 7,5    | 0.021   | 0.025  | 0.030  | 0.042  | 0.061 | 0.098 | 0.15  | 0.22  | 0.31 | 0.43 | 0.61  | 0.97 | 1.8  |
| ▶ 1      | 1.2   | 50               | 2          |      |                  | 18             | 15     | 0.021   | 0.024  | 0.028  | 0.040  | 0.06  | 0.10  | 0.15  | 0.24  | 0.35 | 0.51 | 0.73  | 1.1  | 1.7  |
| ▶ 1.6    | 2     | 25, 40           | 1, 1½      |      |                  | 22             | 7,5    | 0.034   | 0.041  | 0.048  | 0.067  | 0.098 | 0.16  | 0.24  | 0.36  | 0.50 | 0.69 | 0.98  | 1.6  | 2.9  |
| ▶ 1.6    | 2     | 50               | 2          |      |                  | 22             | 15     | 0.034   | 0.038  | 0.044  | 0.063  | 0.099 | 0.16  | 0.25  | 0.38  | 0.56 | 0.81 | 1.2   | 1.7  | 2.7  |
| ▶ 2.5    | 3     | 25               | 1          |      |                  | 22             | 7,5    | 0.022   | 0.027  | 0.039  | 0.080  | 0.15  | 0.24  | 0.37  | 0.56  | 0.82 | 1.3  | 2.1   | 2.7  | 3.2  |
| ▶ 2.5    | 3     | 40               | 1½         |      |                  | 24             | 7,5    | 0.024   | 0.028  | 0.039  | 0.080  | 0.15  | 0.24  | 0.37  | 0.57  | 0.86 | 1.4  | 2.0   | 2.7  | 3.3  |
| ▶ 2.5    | 3     | 50, 80           | 2, 3       |      |                  | 24             | 15     | 0.043   | 0.048  | 0.056  | 0.092  | 0.16  | 0.25  | 0.39  | 0.60  | 0.89 | 1.3  | 1.8   | 2.7  | 4.3  |
| ▶ 3.5    | 4     | 25               | 1          |      |                  | 22             | 7,5    | 0.050   | 0.067  | 0.089  | 0.16   | 0.25  | 0.37  | 0.58  | 0.86  | 1.3  | 1.9  | 2.7   | 3.4  | 3.7  |
| ▶ 4      | 5     | 40               | 1½         |      |                  | 31             | 7,5    | 0.066   | 0.077  | 0.093  | 0.14   | 0.22  | 0.34  | 0.50  | 0.75  | 1.1  | 1.6  | 2.6   | 3.9  | 5.3  |
| ▶ 4      | 5     | 50, 80, 100      | 2, 3, 4    |      |                  | 31             | 15     | 0.050   | 0.067  | 0.090  | 0.15   | 0.25  | 0.40  | 0.62  | 0.95  | 1.4  | 2.1  | 3.0   | 4.4  | 6.9  |
| ▶ 6.3    | 7.5   | 40               | 1½         |      |                  | 31             | 7,5    | 0.087   | 0.098  | 0.12   | 0.20   | 0.32  | 0.49  | 0.74  | 1.1   | 1.8  | 2.9  | 4.5   | 5.9  | 6.9  |
| ▶ 6.3    | 7.5   | 50, 80, 100, 150 | 2, 3, 4, 6 |      |                  | 31             | 15     | 0.13  | 0.21   | 0.28   | 0.47   | 0.70  | 0.99  | 1.41  | 2.0   | 2.6  | 3.6  | 4.9   | 6.8  | 8.6  |
| ▶ 10     | 12    | 50, 80, 100, 150 | 2, 3, 4, 6 |      |                  | 38             | 15     | 0.17  | 0.18   | 0.21   | 0.35   | 0.60  | 0.94  | 1.5   | 2.3   | 3.4  | 4.9  | 7.0   | 10.4 | 16.5 |
| ▶ 12     | 14    | 80, 100, 150     | 3, 4, 6    |      |                  | 38             | 15     | 0.20  | 0.22   | 0.26   | 0.42   | 0.71  | 1.1   | 1.8   | 2.7   | 4.1  | 5.9  | 8.4   | 12.5 | 19.8 |
| ▶ 16     | 20    | 80, 100          | 3, 4       |      |                  | 50             | 15     | 0.22  | 0.28   | 0.37   | 0.61   | 0.96  | 1.5   | 2.2   | 3.3   | 4.9  | 7.2  | 10.5  | 15.6 | 18.2 |
| ▶ 16     | 20    | 150, 200         | 6, 8       |      |                  | 50             | 30     | 0.34  | 0.38   | 0.44   | 0.63   | 0.99  | 1.6   | 2.5   | 3.8   | 5.6  | 8.1  | 11.7  | 17.3 | 27.4 |
| ▶ 25     | 30    | 80, 100          | 3, 4       |      |                  | 63             | 15     | 0.38  | 0.50   | 0.64   | 0.99   | 1.5   | 2.3   | 3.5   | 5.7   | 9.1  | 13.8 | 19.2  | 24.3 | 27.5 |
| ▶ 25     | 30    | 150, 200         | 6, 8       |      |                  | 63             | 30     | 0.54  | 0.60   | 0.69   | 0.99   | 1.5   | 2.5   | 3.8   | 5.9   | 8.8  | 12.7 | 18.3  | 27.1 | 42.9 |
| ▶ 40     | 47    | 100              | 4          | 80   | 15               | 0.66           | 0.73   | 0.85  | 1.4    | 2.4    | 3.8    | 5.9   | 9.1   | 13.6  | 19.6  | 28.1 | 41.7 | 62.0  |      |      |
| ▶ 40     | 47    | 150, 200         | 6, 8       | 80   | 30               | 0.86           | 0.96   | 1.1   | 1.6    | 2.5    | 3.9    | 6.1   | 9.4   | 14.1  | 20.4  | 29.2 | 43.4 | 68.6  |      |      |
| ▶ 63     | 75    | 150, 200         | 6, 8       | 100  | 30               | 1.0            | 1.1    | 1.3   | 2.2    | 3.8    | 5.9    | 9.3   | 14.3  | 21.4  | 30.9  | 44.3 | 65.7 | 97.6  |      |      |
| ▶ 80     | 95    | 200              | 8          | 100  | 30               | 1.3            | 1.5    | 1.7   | 2.8    | 4.8    | 7.6    | 11.8  | 18.1  | 27.1  | 39.2  | 56.2 | 83.4 | 124.0 |      |      |

**Table 3251.12:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: AC-3 Trim with linear characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN               | NPS        | NR   | CH     | Seat Ø [mm] | Travel | Travel in % · Flow coefficient ( $K_v$ coefficient) |       |       |       |      |      |      |      |      |      |      |      |      |
|----------|-------|------------------|------------|------|--------|-------------|--------|---|-------|-------|-------|------|------|------|------|------|------|------|------|------|
|          |       |                  |            |      |        |             |        | 0   | 5     | 10    | 20    | 30   | 40   | 50   | 60   | 70   | 80   | 90   | 100  | 110  |
| ▶ 0.4    | 0.5   | 25               | 1          | AC-3 | Linear | 12          | 7,5    | 0.0062  | 0.020 | 0.042 | 0.086 | 0.13 | 0.17 | 0.22 | 0.26 | 0.30 | 0.35 | 0.39 | 0.43 | 0.47 |
| ▶ 0.63   | 0.75  | 25, 40           | 1, 1½      |      |        | 16          | 7,5    | 0.0097  | 0.031 | 0.066 | 0.14  | 0.20 | 0.27 | 0.34 | 0.41 | 0.48 | 0.54 | 0.61 | 0.68 | 0.75 |
| ▶ 1      | 1.2   | 25, 40           | 1, 1½      |      |        | 18          | 7,5    | 0.014   | 0.045 | 0.094 | 0.19  | 0.29 | 0.39 | 0.49 | 0.58 | 0.68 | 0.78 | 0.88 | 0.97 | 1.1  |
| ▶ 1      | 1.2   | 50               | 2          |      |        | 18          | 15     | 0.015   | 0.049 | 0.10  | 0.21  | 0.32 | 0.43 | 0.54 | 0.65 | 0.76 | 0.86 | 0.97 | 1.1  | 1.2  |
| ▶ 1.6    | 2     | 25, 40           | 1, 1½      |      |        | 22          | 7,5    | 0.023   | 0.074 | 0.16  | 0.32  | 0.48 | 0.64 | 0.80 | 0.96 | 1.1  | 1.3  | 1.4  | 1.6  | 1.8  |
| ▶ 1.6    | 2     | 50               | 2          |      |        | 22          | 15     | 0.025   | 0.079 | 0.17  | 0.34  | 0.52 | 0.69 | 0.86 | 1.0  | 1.2  | 1.4  | 1.6  | 1.7  | 1.9  |
| ▶ 2.5    | 3     | 25               | 1          |      |        | 22          | 7,5    | 0.036   | 0.12  | 0.25  | 0.51  | 0.76 | 1.0  | 1.3  | 1.5  | 1.8  | 2.0  | 2.3  | 2.6  | 2.8  |
| ▶ 2.5    | 3     | 40               | 1½         |      |        | 24          | 7,5    | 0.037   | 0.12  | 0.25  | 0.52  | 0.78 | 1.0  | 1.3  | 1.6  | 1.8  | 2.1  | 2.4  | 2.6  | 2.9  |
| ▶ 2.5    | 3     | 50, 80           | 2, 3       |      |        | 24          | 15     | 0.038   | 0.12  | 0.26  | 0.54  | 0.81 | 1.1  | 1.3  | 1.6  | 1.9  | 2.2  | 2.4  | 2.7  | 3.0  |
| ▶ 3.5    | 4     | 25               | 1          |      |        | 22          | 7,5    | 0.048   | 0.15  | 0.32  | 0.66  | 1.0  | 1.3  | 1.7  | 2.0  | 2.3  | 2.7  | 3.0  | 3.3  | 3.7  |
| ▶ 4      | 5     | 40               | 1½         |      |        | 31          | 7,5    | 0.057   | 0.18  | 0.38  | 0.79  | 1.2  | 1.6  | 2.0  | 2.4  | 2.8  | 3.2  | 3.6  | 4.0  | 4.4  |
| ▶ 4      | 5     | 50, 80, 100      | 2, 3, 4    |      |        | 31          | 15     | 0.062   | 0.20  | 0.42  | 0.86  | 1.3  | 1.7  | 2.2  | 2.6  | 3.0  | 3.5  | 3.9  | 4.3  | 4.7  |
| ▶ 6.3    | 7.5   | 40               | 1½         |      |        | 31          | 7,5    | 0.085   | 0.27  | 0.58  | 1.2   | 1.8  | 2.4  | 3.0  | 3.6  | 4.2  | 4.8  | 5.4  | 6.0  | 6.6  |
| ▶ 6.3    | 7.5   | 50, 80, 100, 150 | 2, 3, 4, 6 |      |        | 31          | 15     | 0.097   | 0.31  | 0.66  | 1.4   | 2.0  | 2.7  | 3.4  | 4.1  | 4.8  | 5.4  | 6.1  | 6.8  | 7.5  |
| ▶ 10     | 12    | 50, 80, 100, 150 | 2, 3, 4, 6 |      |        | 38          | 15     | 0.15  | 0.48  | 1.0   | 2.1   | 3.1  | 4.2  | 5.2  | 6.3  | 7.3  | 8.4  | 9.4  | 10.5 | 11.5 |
| ▶ 12     | 14    | 80, 100, 150     | 3, 4, 6    |      |        | 38          | 15     | 0.18  | 0.57  | 1.2   | 2.5   | 3.7  | 5.0  | 6.3  | 7.5  | 8.8  | 10.0 | 11.3 | 12.5 | 13.8 |
| ▶ 16     | 20    | 80, 100          | 3, 4       |      |        | 50          | 15     | 0.22  | 0.72  | 1.5   | 3.1   | 4.7  | 6.3  | 7.8  | 9.4  | 11.0 | 12.5 | 14.1 | 15.7 | 17.2 |
| ▶ 16     | 20    | 150, 200         | 6, 8       |      |        | 50          | 30     | 0.25  | 0.79  | 1.7   | 3.4   | 5.2  | 6.9  | 8.6  | 10.4 | 12.1 | 13.8 | 15.5 | 17.3 | 19.0 |
| ▶ 25     | 30    | 80, 100          | 3, 4       |      |        | 63          | 15     | 0.34  | 1.1   | 2.3   | 4.8   | 7.2  | 9.6  | 12.0 | 14.4 | 16.8 | 19.2 | 21.6 | 24.0 | 26.4 |
| ▶ 25     | 30    | 150, 200         | 6, 8       |      |        | 63          | 30     | 0.38  | 1.2   | 2.6   | 5.4   | 8.1  | 10.8 | 13.5 | 16.2 | 18.9 | 21.6 | 24.3 | 27.0 | 29.7 |
| ▶ 40     | 47    | 100              | 4          |      |        | 80          | 15     | 0.60  | 1.9   | 4.0   | 8.3   | 12.5 | 16.7 | 20.9 | 25.1 | 29.2 | 33.4 | 37.6 | 41.8 | 46.0 |
| ▶ 40     | 47    | 150, 200         | 6, 8       |      |        | 80          | 30     | 0.62  | 2.0   | 4.2   | 8.6   | 12.9 | 17.2 | 21.6 | 25.9 | 30.2 | 34.5 | 38.8 | 43.2 | 47.5 |
| ▶ 63     | 75    | 150, 200         | 6, 8       |      |        | 100         | 30     | 0.94  | 3.0   | 6.4   | 13.1  | 19.7 | 26.3 | 32.9 | 39.5 | 46.1 | 52.6 | 59.2 | 65.8 | 72.4 |
| ▶ 80     | 95    | 200              | 8          |      |        | 100         | 30     | 1.2   | 3.8   | 8.1   | 16.6  | 25.0 | 33.4 | 41.7 | 50.1 | 58.5 | 66.9 | 75.2 | 83.6 | 92.0 |

**Table 3251.13:**  $K_V$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: Perforated plug without flow divider, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{VS}$ | $C_V$ | DN                           | NPS                  | NR              | CH               | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $K_V$ coefficient) |       |      |      |       |       |       |        |        |        |        |        |        |
|----------|-------|------------------------------|----------------------|-----------------|------------------|----------------|--------|---|-------|------|------|-------|-------|-------|--------|--------|--------|--------|--------|--------|
|          |       |                              |                      |                 |                  |                |        | 0   | 5     | 10   | 20   | 30    | 40    | 50    | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 4      | 5     | 25, 40, 50, 80               | 1, 1½, 2, 3          | Perforated plug | Equal percentage | 24             | 15     | 0.028   | 0.075 | 0.12 | 0.18 | 0.26  | 0.39  | 0.58  | 0.86   | 1.3    | 1.8    | 2.7    | 4.1    | 5.4    |
| ▶ 6.3    | 7.5   | 25, 40, 50, 80               | 1, 1½, 2, 3          |                 |                  | 24             | 15     | 0.063   | 0.14  | 0.19 | 0.28 | 0.44  | 0.62  | 0.92  | 1.5    | 2.2    | 3.2    | 4.5    | 5.8    | 6.5    |
| ▶ 10     | 12    | 40, 50, 80                   | 1½, 2, 3             |                 |                  | 31             | 15     | 0.18  | 0.19  | 0.22 | 0.33 | 0.57  | 0.90  | 1.5   | 2.4    | 4.1    | 6.5    | 8.9    | 10.9   | 12.8   |
| ▶ 16     | 20    | 40, 50, 80, 100              | 1½, 2, 3, 4          |                 |                  | 38             | 15     | 0.28  | 0.44  | 0.59 | 0.95 | 1.3   | 1.9   | 2.8   | 4.3    | 7.1    | 10.0   | 13.0   | 15.8   | 18.3   |
| ▶ 25     | 30    | 50, 80, 100                  | 2, 3, 4              |                 |                  | 50             | 15     | 0.47  | 0.80  | 1.1  | 1.5  | 2.2   | 3.4   | 5.9   | 9.6    | 13.8   | 17.9   | 21.9   | 25.7   | 29.2   |
| ▶ 36     | 42    | 50, 80, 100                  | 2, 3, 4              |                 |                  | 50             | 30     | 0.36  | 0.91  | 1.2  | 1.9  | 3.0   | 4.7   | 7.8   | 12.3   | 17.7   | 24.3   | 30.8   | 36.0   | 40.0   |
| ▶ 54     | 62    | 80, 100, 150                 | 3, 4, 6              |                 |                  | 63             | 30     | 0.54  | 0.81  | 1.0  | 1.6  | 2.9   | 4.9   | 8.2   | 14.8   | 23.8   | 34.7   | 46.3   | 54.6   | 59.4   |
| ▶ 63     | 75    | 80, 100, 150, 200, 250       | 3, 4, 6, 8, 10       |                 |                  | 80             | 30     | 0.63  | 1.0   | 1.4  | 2.6  | 4.1   | 6.0   | 8.9   | 14.0   | 25.4   | 40.5   | 53.6   | 64.1   | 72.5   |
| ▶ 80     | 95    | 80, 100, 150, 200, 250       | 3, 4, 6, 8, 10       |                 |                  | 80             | 30     | 0.80  | 1.0   | 1.3  | 2.2  | 4.1   | 9.7   | 19.6  | 36.9   | 51.8   | 64.8   | 76.3   | 86.0   | 92.7   |
| ▶ 100    | 120   | 100, 150, 200, 250, 300      | 4, 6, 8, 10, 12      |                 |                  | 100            | 30     | 1.0   | 1.3   | 1.8  | 3.2  | 5.7   | 9.6   | 15.8  | 26.1   | 40.8   | 59.4   | 81.9   | 100.1  | 110.9  |
| ▶ 160    | 190   | 150, 200, 250, 300           | 6, 8, 10, 12         |                 |                  | 125            | 60     | 1.6   | 2.0   | 2.7  | 5.7  | 10.0  | 15.4  | 22.7  | 33.8   | 50.1   | 80.9   | 124.1  | 162.4  | 193.1  |
| ▶ 250    | 290   | 150, 200, 250, 300, 350, 400 | 6, 8, 10, 12, 14, 16 |                 |                  | 150            | 60     | 2.5   | 3.6   | 4.9  | 9.1  | 15.3  | 24.1  | 37.0  | 66.9   | 111.3  | 165.4  | 215.5  | 250.7  | 278.5  |
| ▶ 360    | 420   | 200, 250, 300, 350, 400      | 8, 10, 12, 14, 16    |                 |                  | 200            | 60     | 3.6   | 4.6   | 6.0  | 11.0 | 17.7  | 31.0  | 54.8  | 94.0   | 151.0  | 218.0  | 292.0  | 358.5  | 394.6  |
| ▶ 420    | 485   | 200, 250, 300, 350, 400      | 8, 10, 12, 14, 16    |                 |                  | 200            | 60     | 4.2   | 5.6   | 8.4  | 19.7 | 53.3  | 100.0 | 149.0 | 203.0  | 260.9  | 322.7  | 389.0  | 459.2  | 497.0  |
| ▶ 630    | 735   | 250, 300, 350, 400, 500      | 10, 12, 14, 16, 20   |                 |                  | 250            | 120    | 6.3   | 7.0   | 9.1  | 18.4 | 33.7  | 55.2  | 86.6  | 136.0  | 232.0  | 369.0  | 522.0  | 668.5  | 712.0  |
| ▶ 1000   | 1150  | 300, 350, 400, 500           | 12, 14, 16, 20       |                 |                  | 300            | 120    | 10.0  | 11.4  | 14.6 | 28.4 | 53.2  | 87.2  | 141.6 | 250.0  | 429.0  | 647.0  | 861.0  | 1020.8 | 1123.1 |
| ▶ 1350   | 1560  | 350, 400, 500                | 14, 16, 20           |                 |                  | 350            | 120    | 13.0  | 14.0  | 16.5 | 37.5 | 72.6  | 123.8 | 241.0 | 414.0  | 620.0  | 861.0  | 1152.0 | 1397.0 | 1541.2 |
| ▶ 1650   | 1900  | 400, 500                     | 16, 20               |                 |                  | 400            | 120    | 16.5  | 18.0  | 22.1 | 50.1 | 91.6  | 157.9 | 321.8 | 596.0  | 894.0  | 1179.0 | 1432.0 | 1665.1 | 1826.3 |
| ▶ 2500   | 2900  | 500                          | 20                   |                 |                  | 500            | 120    | 25.0  | 28.0  | 38.3 | 89.3 | 157.0 | 296.0 | 651.0 | 1045.0 | 1430.0 | 1814.0 | 2177.9 | 2459.9 | 2691.1 |



**Table 3251.14:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: Perforated plug without flow divider, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                           | NPS                  | NR              | CH     | Seat Ø [mm] | Travel | Travel in % · Flow coefficient ( $K_v$ coefficient) |       |       |       |        |        |        |        |        |        |        |        |        |
|----------|-------|------------------------------|----------------------|-----------------|--------|-------------|--------|---|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
|          |       |                              |                      |                 |        |             |        | 0   | 5     | 10    | 20    | 30     | 40     | 50     | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 4      | 5     | 25, 40, 50, 80               | 1, 1½, 2, 3          | Perforated plug | Linear | 24          | 15     | 0.040   | 0.25  | 0.42  | 0.78  | 1.2    | 1.6    | 2.1    | 2.5    | 3.0    | 3.6    | 4.2    | 4.9    | 5.5    |
| ▶ 6.3    | 7.5   | 25, 40, 50, 80               | 1, 1½, 2, 3          |                 |        | 24          | 15     | 0.073   | 0.43  | 0.73  | 1.3   | 2.0    | 2.6    | 3.2    | 3.8    | 4.5    | 5.2    | 5.8    | 6.5    | 7.2    |
| ▶ 10     | 12    | 40, 50, 80                   | 1½, 2, 3             |                 |        | 31          | 15     | 0.10  | 0.53  | 0.95  | 1.8   | 2.6    | 3.6    | 4.7    | 5.8    | 7.0    | 8.3    | 9.8    | 11.1   | 12.2   |
| ▶ 16     | 20    | 40, 50, 80                   | 1½, 2, 3             |                 |        | 31          | 15     | 0.28  | 1.5   | 2.6   | 4.7   | 6.8    | 8.9    | 10.8   | 12.3   | 13.5   | 14.7   | 15.6   | 16.5   | 17.3   |
| ▶ 25     | 30    | 40, 50, 80, 100              | 1½, 2, 3, 4          |                 |        | 38          | 15     | 0.006   | 1.1   | 2.5   | 5.9   | 9.1    | 12.3   | 15.2   | 18.0   | 20.1   | 22.0   | 23.4   | 24.8   | 26.0   |
| ▶ 40     | 47    | 50, 80, 100                  | 2, 3, 4              |                 |        | 50          | 30     | 0.53  | 2.6   | 4.7   | 9.3   | 14.6   | 20.5   | 26.3   | 31.8   | 36.6   | 40.7   | 44.1   | 46.8   | 48.5   |
| ▶ 63     | 75    | 80, 100, 150                 | 3, 4, 6              |                 |        | 63          | 30     | 0.63  | 3.0   | 5.6   | 11.9  | 18.3   | 25.7   | 33.3   | 41.9   | 49.5   | 56.2   | 62.0   | 65.8   | 68.0   |
| ▶ 100    | 120   | 80, 100, 150, 200, 250       | 3, 4, 6, 8, 10       |                 |        | 80          | 30     | 1.0   | 6.9   | 13.6  | 26.1  | 37.6   | 48.2   | 58.9   | 68.2   | 77.3   | 85.8   | 93.2   | 99.1   | 103.9  |
| ▶ 130    | 150   | 100, 150, 200, 250, 300      | 4, 6, 8, 10, 12      |                 |        | 100         | 30     | 0.54  | 5.5   | 12.1  | 27.1  | 42.6   | 58.0   | 72.1   | 85.2   | 97.2   | 108.9  | 118.9  | 128.9  | 138.4  |
| ▶ 250    | 290   | 150, 200, 250, 300           | 6, 8, 10, 12         |                 |        | 125         | 60     | 2.4   | 13.0  | 25.9  | 57.6  | 88.2   | 117.7  | 146.7  | 173.8  | 200.4  | 225.6  | 248.3  | 268.3  | 286.9  |
| ▶ 320    | 375   | 150, 200, 250, 300, 350, 399 | 6, 8, 10, 12, 14, 16 |                 |        | 150         | 60     | 3.2   | 16.5  | 31.8  | 67.2  | 105.8  | 148.8  | 191.7  | 230.9  | 264.3  | 291.2  | 312.2  | 328.2  | 340.6  |
| ▶ 500    | 580   | 200, 250, 300, 350, 400      | 8, 10, 12, 14, 16    |                 |        | 200         | 60     | 7.5   | 19.2  | 43.0  | 106.3 | 172.1  | 234.4  | 294.3  | 349.4  | 397.0  | 439.1  | 473.6  | 499.7  | 520.0  |
| ▶ 900    | 1040  | 250, 300, 350, 400, 500      | 10, 12, 14, 16, 20   |                 |        | 250         | 120    | 9.0   | 45.0  | 91.7  | 197.0 | 306.0  | 414.0  | 522.0  | 627.0  | 721.0  | 807.0  | 882.1  | 938.3  | 968.0  |
| ▶ 1300   | 1500  | 300, 350, 400, 500           | 12, 14, 16, 20       |                 |        | 300         | 120    | 13.0  | 112.2 | 216.0 | 399.0 | 565.0  | 726.0  | 878.0  | 1013.0 | 1123.0 | 1211.0 | 1280.0 | 1326.2 | 1354.3 |
| ▶ 1700   | 2000  | 350, 400, 500                | 14, 16, 20           |                 |        | 350         | 120    | 17.0  | 88.0  | 167.8 | 354.0 | 556.0  | 776.5  | 1011.0 | 1215.0 | 1384.0 | 1537.0 | 1669.0 | 1755.0 | 1789.3 |
| ▶ 2100   | 2450  | 400, 500                     | 16, 20               |                 |        | 400         | 120    | 21.0  | 173.4 | 328.1 | 608.0 | 875.0  | 1149.0 | 1403.0 | 1635.0 | 1830.0 | 1978.8 | 2094.8 | 2186.0 | 2222.3 |
| ▶ 3200   | 3700  | 500                          | 20                   |                 |        | 500         | 120    | 32.0  | 226.2 | 421.5 | 851.4 | 1257.6 | 1635.3 | 1976.5 | 2286.1 | 2554.8 | 2792.1 | 2998.1 | 3163.9 | 3231.5 |

**Table 3251.15:**  $K_V$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: Perforated plug with flow divider St I, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{Vs}$ | $C_V$ | DN                           | NPS                  | NR                       | CH               | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $K_V$ coefficient) |       |      |      |       |       |       |        |        |        |        |        |        |
|----------|-------|------------------------------|----------------------|--------------------------|------------------|----------------|--------|---|-------|------|------|-------|-------|-------|--------|--------|--------|--------|--------|--------|
|          |       |                              |                      |                          |                  |                |        | 0   | 5     | 10   | 20   | 30    | 40    | 50    | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 3.6    | 4.2   | 25, 40, 50, 80               | 1, 1½, 2, 3          | Perforated plug and St I | Equal percentage | 24             | 15     | 0.028   | 0.075 | 0.12 | 0.18 | 0.26  | 0.39  | 0.58  | 0.86   | 1.3    | 1.8    | 2.7    | 4.1    | 5.4    |
| ▶ 5.7    | 7     | 25, 40, 50, 80               | 1, 1½, 2, 3          |                          |                  | 24             | 15     | 0.063   | 0.14  | 0.19 | 0.28 | 0.44  | 0.62  | 0.92  | 1.5    | 2.2    | 3.2    | 4.5    | 5.8    | 6.4    |
| ▶ 9      | 10.5  | 40, 50, 80                   | 1½, 2, 3             |                          |                  | 31             | 15     | 0.18  | 0.19  | 0.22 | 0.33 | 0.57  | 0.90  | 1.5   | 2.4    | 4.1    | 6.5    | 8.8    | 10.8   | 12.6   |
| ▶ 14.5   | 17    | 40, 50, 80, 100              | 1½, 2, 3, 4          |                          |                  | 38             | 15     | 0.28  | 0.44  | 0.59 | 0.95 | 1.3   | 1.9   | 2.8   | 4.3    | 7.0    | 9.9    | 12.9   | 15.6   | 18.1   |
| ▶ 22     | 26    | 50, 80, 100                  | 2, 3, 4              |                          |                  | 50             | 15     | 0.47  | 0.80  | 1.06 | 1.5  | 2.2   | 3.4   | 5.9   | 9.6    | 13.5   | 17.3   | 20.9   | 24.1   | 27.3   |
| ▶ 32     | 37    | 50, 80, 100                  | 2, 3, 4              |                          |                  | 50             | 30     | 0.36  | 0.91  | 1.22 | 1.9  | 3.0   | 4.7   | 7.8   | 12.3   | 17.4   | 23.5   | 29.4   | 33.9   | 37.3   |
| ▶ 47     | 55    | 80, 100, 150                 | 3, 4, 6              |                          |                  | 63             | 30     | 0.54  | 0.81  | 1.0  | 1.6  | 2.9   | 4.9   | 8.2   | 14.8   | 23.1   | 32.8   | 42.8   | 49.1   | 52.9   |
| ▶ 57     | 67    | 80, 100, 150, 200, 250       | 3, 4, 6, 8, 10       |                          |                  | 80             | 30     | 0.63  | 1.0   | 1.4  | 2.6  | 4.1   | 6.0   | 8.9   | 14.0   | 24.6   | 38.3   | 49.6   | 57.7   | 64.5   |
| ▶ 72     | 85    | 80, 100, 150, 200, 250       | 3, 4, 6, 8, 10       |                          |                  | 80             | 30     | 0.80  | 1.0   | 1.3  | 2.2  | 4.1   | 9.7   | 19.6  | 36.9   | 49.9   | 60.5   | 69.4   | 75.7   | 80.4   |
| ▶ 90     | 105   | 100, 150, 200, 250, 300      | 4, 6, 8, 10, 12      |                          |                  | 100            | 30     | 1.0   | 1.3   | 1.8  | 3.2  | 5.7   | 9.6   | 15.8  | 26.1   | 39.2   | 55.2   | 73.9   | 87.1   | 95.0   |
| ▶ 144    | 170   | 150, 200, 250, 300           | 6, 8, 10, 12         |                          |                  | 125            | 60     | 1.6   | 2.0   | 2.7  | 5.7  | 10.0  | 15.4  | 22.7  | 33.8   | 48.5   | 76.0   | 113.8  | 144.5  | 169.7  |
| ▶ 225    | 265   | 150, 200, 250, 300, 350, 400 | 6, 8, 10, 12, 14, 16 |                          |                  | 150            | 60     | 2.5   | 3.6   | 4.9  | 9.1  | 15.3  | 24.1  | 37.0  | 66.9   | 108.6  | 158.1  | 202.6  | 230.6  | 254.0  |
| ▶ 320    | 375   | 200, 250, 300, 350, 400      | 8, 10, 12, 14, 16    |                          |                  | 200            | 60     | 3.6   | 4.6   | 6.0  | 11.0 | 17.7  | 31.0  | 54.8  | 94.0   | 147.4  | 208.4  | 274.5  | 329.8  | 359.9  |
| ▶ 375    | 435   | 200, 250, 300, 350, 400      | 8, 10, 12, 14, 16    |                          |                  | 200            | 60     | 4.2   | 5.6   | 8.4  | 19.7 | 53.3  | 100.0 | 149.0 | 203.0  | 254.6  | 308.5  | 367.0  | 421.0  | 453.3  |
| ▶ 560    | 650   | 250, 300, 350, 400, 500      | 10, 12, 14, 16, 20   |                          |                  | 250            | 120    | 6.3   | 7.0   | 9.1  | 18.4 | 33.7  | 55.2  | 86.6  | 136.0  | 227.1  | 354.8  | 494.6  | 621.7  | 657.2  |
| ▶ 900    | 1040  | 300, 350, 400, 500           | 12, 14, 16, 20       |                          |                  | 300            | 120    | 10.0  | 11.4  | 14.6 | 28.4 | 53.2  | 87.2  | 141.6 | 250.0  | 415.5  | 609.6  | 793.2  | 913.6  | 993.4  |
| ▶ 1200   | 1400  | 350, 400, 500                | 14, 16, 20           |                          |                  | 350            | 120    | 13.0  | 14.0  | 16.5 | 37.5 | 72.6  | 123.8 | 241.0 | 414.0  | 605.1  | 823.1  | 1082.9 | 1285.3 | 1405.5 |
| ▶ 1500   | 1730  | 400, 500                     | 16, 20               |                          |                  | 400            | 120    | 16.5  | 18.0  | 22.1 | 50.1 | 91.6  | 157.9 | 321.8 | 596.0  | 872.5  | 1127.1 | 1346.1 | 1531.9 | 1665.6 |
| ▶ 2250   | 2600  | 500                          | 20                   |                          |                  | 500            | 120    | 25.0  | 28.0  | 38.3 | 89.3 | 157.0 | 296.0 | 651.0 | 1045.0 | 1395.7 | 1734.2 | 2047.3 | 2263.1 | 2454.3 |

**Table 3251.16:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: Perforated plug with flow divider St I, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                           | NPS                  | NR                       | CH     | Seat Ø [mm] | Travel | Travel in % · Flow coefficient ( $K_v$ coefficient) |       |       |       |        |        |        |        |        |        |        |        |        |
|----------|-------|------------------------------|----------------------|--------------------------|--------|-------------|--------|---|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
|          |       |                              |                      |                          |        |             |        | 0   | 5     | 10    | 20    | 30     | 40     | 50     | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 3.6    | 4.2   | 25, 40, 50, 80               | 1, 1½, 2, 3          | Perforated plug and St I | Linear | 24          | 15     | 0.040   | 0.25  | 0.41  | 0.78  | 1.2    | 1.6    | 2.0    | 2.5    | 3.0    | 3.5    | 4.2    | 4.8    | 5.4    |
| ▶ 5.7    | 7     | 25, 40, 50, 80               | 1, 1½, 2, 3          |                          |        | 24          | 15     | 0.073   | 0.43  | 0.73  | 1.3   | 1.9    | 2.6    | 3.2    | 3.8    | 4.4    | 5.1    | 5.8    | 6.4    | 7.1    |
| ▶ 9      | 10.5  | 40, 50, 80                   | 1½, 2, 3             |                          |        | 31          | 15     | 0.10  | 0.53  | 0.94  | 1.7   | 2.6    | 3.6    | 4.6    | 5.8    | 7.0    | 8.3    | 9.7    | 11.0   | 12.0   |
| ▶ 14.5   | 17    | 40, 50, 80                   | 1½, 2, 3             |                          |        | 31          | 15     | 0.28  | 1.50  | 2.6   | 4.7   | 6.7    | 8.8    | 10.7   | 12.2   | 13.4   | 14.5   | 15.5   | 16.4   | 17.1   |
| ▶ 22     | 26    | 40, 50, 80, 100              | 1½, 2, 3, 4          |                          |        | 38          | 15     | 0.006   | 1.1   | 2.4   | 5.4   | 8.3    | 11.2   | 13.8   | 16.3   | 18.3   | 20.0   | 21.3   | 22.6   | 23.6   |
| ▶ 36     | 42    | 50, 80, 100                  | 2, 3, 4              |                          |        | 50          | 30     | 0.53  | 2.6   | 4.5   | 8.6   | 13.6   | 19.1   | 24.4   | 29.5   | 34.0   | 37.9   | 41.0   | 43.5   | 45.1   |
| ▶ 57     | 67    | 80, 100, 150                 | 3, 4, 6              |                          |        | 63          | 30     | 0.63  | 3.0   | 5.2   | 10.5  | 16.1   | 22.6   | 29.3   | 36.8   | 43.6   | 49.5   | 54.5   | 57.9   | 59.9   |
| ▶ 90     | 105   | 80, 100, 150, 200, 250       | 3, 4, 6, 8, 10       |                          |        | 80          | 30     | 1.0   | 6.9   | 12.6  | 22.9  | 33.1   | 42.4   | 51.8   | 60.0   | 68.0   | 75.5   | 82.0   | 87.2   | 91.4   |
| ▶ 115    | 135   | 100, 150, 200, 250, 300      | 4, 6, 8, 10, 12      |                          |        | 100         | 30     | 0.54  | 5.5   | 11.4  | 24.4  | 38.3   | 52.2   | 64.9   | 76.7   | 87.5   | 98.0   | 107.0  | 116.0  | 124.6  |
| ▶ 225    | 265   | 150, 200, 250, 300           | 6, 8, 10, 12         |                          |        | 125         | 60     | 2.4   | 13.0  | 22.8  | 46.1  | 70.6   | 94.2   | 117.4  | 139.0  | 160.3  | 180.5  | 198.6  | 214.6  | 229.5  |
| ▶ 280    | 325   | 150, 200, 250, 300, 350, 400 | 6, 8, 10, 12, 14, 16 |                          |        | 150         | 60     | 3.2   | 16.5  | 30.2  | 61.8  | 97.3   | 136.9  | 176.4  | 212.4  | 243.2  | 267.9  | 287.2  | 301.9  | 313.4  |
| ▶ 450    | 520   | 200, 250, 300, 350, 400      | 8, 10, 12, 14, 16    |                          |        | 200         | 60     | 7.5   | 19.2  | 41.2  | 98.9  | 160.0  | 218.0  | 273.7  | 325.0  | 369.2  | 408.4  | 440.4  | 464.7  | 483.6  |
| ▶ 800    | 950   | 250, 300, 350, 400, 500      | 10, 12, 14, 16, 20   |                          |        | 250         | 120    | 9.0   | 45.0  | 86.7  | 179.3 | 278.5  | 376.7  | 475.0  | 570.6  | 656.1  | 734.4  | 802.7  | 853.9  | 880.9  |
| ▶ 1150   | 1350  | 300, 350, 400, 500           | 12, 14, 16, 20       |                          |        | 300         | 120    | 13.0  | 112.2 | 203.0 | 359.1 | 508.5  | 653.4  | 790.2  | 911.7  | 1010.7 | 1089.9 | 1152.0 | 1193.6 | 1218.9 |
| ▶ 1530   | 1800  | 350, 400, 500                | 14, 16, 20           |                          |        | 350         | 120    | 17.0  | 88.0  | 163.1 | 334.2 | 518.2  | 717.5  | 930.1  | 1117.8 | 1273.3 | 1414.0 | 1535.5 | 1614.6 | 1646.2 |
| ▶ 1900   | 2200  | 400, 500                     | 16, 20               |                          |        | 400         | 120    | 21.0  | 173.4 | 318.9 | 578.8 | 822.5  | 1066.3 | 1290.8 | 1504.2 | 1683.6 | 1820.5 | 1927.2 | 2011.2 | 2044.5 |
| ▶ 2900   | 3300  | 500                          | 20                   |                          |        | 500         | 120    | 32.0  | 226.2 | 401.2 | 783.3 | 1157.0 | 1504.5 | 1818.4 | 2103.2 | 2350.5 | 2568.7 | 2758.2 | 2910.8 | 2973.0 |

**Table 3251.17:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: Perforated plug with flow divider St II, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                           | NPS                  | NR                        | CH               | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $K_v$ coefficient) |       |      |      |      |       |       |       |       |        |        |        |        |
|----------|-------|------------------------------|----------------------|---------------------------|------------------|----------------|--------|---|-------|------|------|------|-------|-------|-------|-------|--------|--------|--------|--------|
|          |       |                              |                      |                           |                  |                |        | 0   | 5     | 10   | 20   | 30   | 40    | 50    | 60    | 70    | 80     | 90     | 100    | 110    |
| ▶ 3.2    | 3.7   | 50, 80                       | 2, 3                 | Perforated plug and St II | Equal percentage | 24             | 15     | 0.028   | 0.075 | 0.12 | 0.18 | 0.26 | 0.39  | 0.58  | 0.86  | 1.3   | 1.8    | 2.7    | 4.0    | 5.3    |
| ▶ 5      | 6     | 50, 80                       | 2, 3                 |                           |                  | 24             | 15     | 0.063   | 0.14  | 0.19 | 0.28 | 0.44 | 0.62  | 0.92  | 1.5   | 2.2   | 3.2    | 4.4    | 5.7    | 6.4    |
| ▶ 8      | 9.5   | 50, 80                       | 2, 3                 |                           |                  | 31             | 15     | 0.18  | 0.19  | 0.22 | 0.33 | 0.57 | 0.90  | 1.5   | 2.4   | 4.0   | 6.5    | 8.7    | 10.7   | 12.5   |
| ▶ 13     | 15    | 50, 80, 100                  | 2, 3, 4              |                           |                  | 38             | 15     | 0.28  | 0.44  | 0.59 | 0.95 | 1.3  | 1.9   | 2.8   | 4.3   | 7.0   | 9.9    | 12.8   | 15.5   | 17.9   |
| ▶ 20     | 23    | 50, 80, 100                  | 2, 3, 4              |                           |                  | 50             | 15     | 0.47  | 0.80  | 1.06 | 1.5  | 2.2  | 3.4   | 5.9   | 9.6   | 13.5  | 17.2   | 20.8   | 23.9   | 27.0   |
| ▶ 29     | 34    | 50, 80, 100                  | 2, 3, 4              |                           |                  | 50             | 30     | 0.36  | 0.91  | 1.22 | 1.9  | 3.0  | 4.7   | 7.8   | 12.3  | 17.3  | 23.4   | 29.2   | 33.5   | 36.9   |
| ▶ 43     | 50    | 80, 100, 150                 | 3, 4, 6              |                           |                  | 63             | 30     | 0.54  | 0.81  | 1.0  | 1.6  | 2.9  | 4.9   | 8.2   | 14.8  | 23.0  | 32.6   | 42.5   | 48.6   | 52.2   |
| ▶ 50     | 60    | 80, 100, 150, 200, 250       | 3, 4, 6, 8, 10       |                           |                  | 80             | 30     | 0.63  | 1.0   | 1.4  | 2.6  | 4.1  | 6.0   | 8.9   | 14.0  | 24.6  | 38.0   | 49.2   | 57.0   | 63.7   |
| ▶ 63     | 75    | 80, 100, 150, 200, 250       | 3, 4, 6, 8, 10       |                           |                  | 80             | 30     | 0.80  | 1.0   | 1.3  | 2.2  | 4.1  | 9.7   | 19.6  | 36.3  | 50.2  | 59.9   | 67.7   | 73.1   | 76.7   |
| ▶ 80     | 95    | 100, 150, 200, 250, 300      | 4, 6, 8, 10, 12      |                           |                  | 100            | 30     | 1.0   | 1.3   | 1.8  | 3.2  | 5.7  | 9.6   | 15.8  | 25.6  | 39.3  | 54.1   | 70.8   | 82.1   | 87.9   |
| ▶ 125    | 145   | 150, 200, 250, 300           | 6, 8, 10, 12         |                           |                  | 125            | 60     | 1.6   | 2.0   | 2.7  | 5.7  | 10.0 | 15.4  | 22.7  | 33.2  | 48.3  | 73.6   | 107.3  | 133.1  | 153.1  |
| ▶ 200    | 235   | 150, 200, 250, 300, 350, 400 | 6, 8, 10, 12, 14, 16 |                           |                  | 150            | 60     | 2.5   | 3.6   | 4.9  | 9.1  | 15.3 | 24.1  | 37.0  | 65.8  | 107.7 | 152.2  | 189.6  | 210.6  | 227.2  |
| ▶ 290    | 335   | 200, 250, 300, 350, 400      | 8, 10, 12, 14, 16    |                           |                  | 200            | 60     | 3.6   | 4.6   | 6.0  | 11.0 | 17.7 | 31.0  | 54.8  | 92.5  | 146.2 | 200.6  | 257.0  | 301.2  | 322.0  |
| ▶ 340    | 390   | 200, 250, 300, 350, 400      | 8, 10, 12, 14, 16    |                           |                  | 200            | 60     | 4.2   | 5.6   | 8.4  | 19.7 | 53.3 | 100.0 | 149.0 | 199.8 | 252.6 | 296.9  | 345.0  | 385.7  | 405.6  |
| ▶ 500    | 580   | 250, 300, 350, 400, 500      | 10, 12, 14, 16, 20   |                           |                  | 250            | 120    | 6.3   | 7.0   | 9.1  | 18.4 | 33.7 | 55.2  | 86.6  | 136.0 | 222.3 | 340.6  | 467.2  | 574.9  | 602.4  |
| ▶ 800    | 950   | 300, 350, 400, 500           | 12, 14, 16, 20       |                           |                  | 300            | 120    | 10.0  | 11.4  | 14.6 | 28.4 | 53.2 | 87.2  | 141.6 | 246.3 | 416.1 | 598.5  | 764.1  | 867.7  | 929.4  |
| ▶ 1080   | 1250  | 350, 400, 500                | 14, 16, 20           |                           |                  | 350            | 120    | 13.0  | 14.0  | 16.5 | 37.5 | 72.6 | 123.8 | 241.0 | 407.4 | 600.2 | 792.1  | 1013.8 | 1173.5 | 1257.6 |
| ▶ 1320   | 1530  | 400, 500                     | 16, 20               |                           |                  | 400            | 120    | 16.5  | 18.0  | 22.1 | 50.1 | 91.6 | 157.9 | 321.8 | 586.5 | 865.4 | 1084.7 | 1260.2 | 1398.7 | 1490.2 |

**Table 3251.18:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: Perforated plug with flow divider St II, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                           | NPS                  | NR                        | CH     | Seat Ø [mm] | Travel | Travel in % · Flow coefficient ( $K_v$ coefficient) |       |       |       |       |       |        |        |        |        |        |        |        |
|----------|-------|------------------------------|----------------------|---------------------------|--------|-------------|--------|---|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|
|          |       |                              |                      |                           |        |             |        | 0   | 5     | 10    | 20    | 30    | 40    | 50     | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 3.2    | 3.7   | 50, 80                       | 2, 3                 | Perforated plug and St II | Linear | 24          | 15     | 0.040   | 0.25  | 0.41  | 0.77  | 1.2   | 1.6   | 2.0    | 2.5    | 2.9    | 3.5    | 4.1    | 4.8    | 5.4    |
| ▶ 5      | 6     | 50, 80                       | 2, 3                 |                           |        | 24          | 15     | 0.073   | 0.43  | 0.72  | 1.3   | 1.9   | 2.5   | 3.1    | 3.8    | 4.4    | 5.1    | 5.7    | 6.4    | 7.0    |
| ▶ 8      | 9.5   | 50, 80                       | 2, 3                 |                           |        | 31          | 15     | 0.10  | 0.53  | 0.94  | 1.7   | 2.6   | 3.5   | 4.6    | 5.7    | 6.9    | 8.2    | 9.6    | 10.9   | 11.9   |
| ▶ 13     | 15    | 50, 80                       | 2, 3                 |                           |        | 31          | 15     | 0.28  | 1.5   | 2.6   | 4.6   | 6.7   | 8.7   | 10.6   | 12.1   | 13.3   | 14.4   | 15.3   | 16.2   | 17.0   |
| ▶ 20     | 23    | 50, 80, 100                  | 2, 3, 4              |                           |        | 38          | 15     | 0.006   | 1.1   | 2.2   | 4.8   | 7.4   | 10.0  | 12.3   | 14.5   | 16.3   | 17.8   | 19.0   | 20.1   | 21.0   |
| ▶ 32     | 37    | 50, 80, 100                  | 2, 3, 4              |                           |        | 50          | 30     | 0.53  | 2.6   | 4.5   | 8.6   | 13.5  | 18.9  | 24.2   | 29.2   | 33.7   | 37.5   | 40.6   | 43.1   | 44.7   |
| ▶ 50     | 60    | 80, 100, 150                 | 3, 4, 6              |                           |        | 63          | 30     | 0.63  | 3.0   | 5.2   | 10.4  | 15.9  | 22.4  | 29.0   | 36.4   | 43.1   | 48.9   | 53.9   | 57.3   | 59.2   |
| ▶ 80     | 95    | 80. 100. 150. 200. 250       | 3. 4. 6. 8. 10       |                           |        | 80          | 30     | 1.0   | 6.9   | 12.3  | 21.9  | 31.6  | 40.5  | 49.5   | 57.3   | 64.9   | 72.1   | 78.3   | 83.2   | 87.3   |
| ▶ 105    | 120   | 100. 150. 200. 250. 300      | 4. 6. 8. 10. 12      |                           |        | 100         | 30     | 0.54  | 5.5   | 10.8  | 22.2  | 34.9  | 47.5  | 59.1   | 69.9   | 79.7   | 89.3   | 97.5   | 105.7  | 113.5  |
| ▶ 200    | 235   | 150. 200. 250. 300           | 6. 8. 10. 12         |                           |        | 125         | 60     | 2.4   | 12.4  | 21.9  | 42.6  | 65.3  | 87.1  | 108.6  | 128.6  | 148.3  | 166.9  | 183.7  | 198.5  | 212.3  |
| ▶ 255    | 295   | 150. 200. 250. 300. 350. 400 | 6. 8. 10. 12. 14. 16 |                           |        | 150         | 60     | 3.2   | 16.5  | 28.7  | 56.4  | 88.9  | 125.0 | 161.0  | 194.0  | 222.0  | 244.6  | 262.2  | 275.7  | 286.1  |
| ▶ 400    | 465   | 200. 250. 300. 350. 400      | 8. 10. 12. 14. 16    |                           |        | 200         | 60     | 7.5   | 19.2  | 39.4  | 91.4  | 148.0 | 201.6 | 253.1  | 300.5  | 341.4  | 377.6  | 407.3  | 429.8  | 447.2  |
| ▶ 720    | 835   | 250. 300. 350. 400. 500      | 10. 12. 14. 16. 20   |                           |        | 250         | 120    | 9.0   | 45.0  | 81.8  | 161.5 | 250.9 | 339.5 | 428.0  | 514.1  | 591.2  | 661.7  | 723.3  | 769.4  | 793.8  |
| ▶ 1030   | 1200  | 300. 350. 400. 500           | 12. 14. 16. 20       |                           |        | 300         | 120    | 13.0  | 112.2 | 190.0 | 346.0 | 478.0 | 600.0 | 720.0  | 830.7  | 920.9  | 993.0  | 1049.6 | 1087.5 | 1110.5 |
| ▶ 1350   | 1560  | 350. 400. 500                | 14. 16. 20           |                           |        | 350         | 120    | 17.0  | 88.0  | 158.4 | 314.4 | 480.4 | 658.5 | 849.2  | 1020.6 | 1162.6 | 1291.1 | 1402.0 | 1474.2 | 1503.0 |
| ▶ 1680   | 1940  | 400. 500                     | 16. 20               |                           |        | 400         | 120    | 21.0  | 173.4 | 309.7 | 549.6 | 770.0 | 983.5 | 1178.5 | 1373.4 | 1537.2 | 1662.2 | 1759.6 | 1836.3 | 1866.7 |

**Table 3251.19:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: Perforated plug with flow divider St III, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                      | NPS               | NR                         | CH               | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $K_v$ coefficient) |       |      |      |      |       |       |       |       |        |        |        |        |
|----------|-------|-------------------------|-------------------|----------------------------|------------------|----------------|--------|---|-------|------|------|------|-------|-------|-------|-------|--------|--------|--------|--------|
|          |       |                         |                   |                            |                  |                |        | 0   | 5     | 10   | 20   | 30   | 40    | 50    | 60    | 70    | 80     | 90     | 100    | 110    |
| ▶ 3      | 3.5   | 50, 80                  | 2, 3              | Perforated plug and St III | Equal percentage | 24             | 15     | 0.028   | 0.075 | 0.12 | 0.18 | 0.26 | 0.39  | 0.58  | 0.86  | 1.3   | 1.8    | 2.7    | 4.0    | 5.3    |
| ▶ 4.8    | 5.6   | 50, 80                  | 2, 3              |                            |                  | 24             | 15     | 0.063   | 0.14  | 0.19 | 0.28 | 0.44 | 0.62  | 0.92  | 1.5   | 2.2   | 3.2    | 4.4    | 5.7    | 6.3    |
| ▶ 7.5    | 9     | 80                      | 3                 |                            |                  | 31             | 15     | 0.18  | 0.19  | 0.22 | 0.33 | 0.57 | 0.90  | 1.5   | 2.4   | 4.0   | 6.4    | 8.7    | 10.6   | 12.3   |
| ▶ 12     | 14    | 80, 100                 | 3, 4              |                            |                  | 38             | 15     | 0.28  | 0.44  | 0.59 | 0.95 | 1.3  | 1.9   | 2.8   | 4.3   | 7.0   | 9.8    | 12.7   | 15.3   | 17.7   |
| ▶ 20     | 23    | 80, 100                 | 3, 4              |                            |                  | 50             | 15     | 0.47  | 0.80  | 1.06 | 1.5  | 2.2  | 3.4   | 5.9   | 9.6   | 13.5  | 17.1   | 20.6   | 23.6   | 26.7   |
| ▶ 27     | 31    | 80, 100                 | 3, 4              |                            |                  | 50             | 30     | 0.36  | 0.91  | 1.22 | 1.9  | 3.0  | 4.7   | 7.8   | 12.3  | 17.3  | 23.2   | 28.9   | 33.1   | 36.5   |
| ▶ 40     | 47    | 100, 150                | 4, 6              |                            |                  | 63             | 30     | 0.54  | 0.81  | 1.0  | 1.6  | 2.9  | 4.9   | 8.2   | 14.8  | 22.9  | 32.4   | 42.1   | 48.0   | 51.6   |
| ▶ 47     | 55    | 150, 200, 250           | 6, 8, 10          |                            |                  | 80             | 30     | 0.63  | 1.0   | 1.4  | 2.6  | 4.1  | 6.0   | 8.9   | 14.0  | 24.5  | 37.8   | 48.8   | 56.4   | 62.9   |
| ▶ 60     | 70    | 150, 200, 250           | 6, 8, 10          |                            |                  | 80             | 30     | 0.80  | 1.0   | 1.3  | 2.2  | 4.1  | 9.7   | 19.6  | 36.2  | 49.9  | 59.0   | 66.0   | 70.5   | 73.5   |
| ▶ 75     | 90    | 150, 200, 250, 300      | 6, 8, 10, 12      |                            |                  | 100            | 30     | 1.0   | 1.3   | 1.8  | 3.2  | 5.7  | 9.6   | 15.8  | 25.5  | 39.0  | 52.9   | 68.4   | 78.1   | 82.8   |
| ▶ 120    | 140   | 150, 200, 250, 300      | 6, 8, 10, 12      |                            |                  | 125            | 60     | 1.6   | 2.0   | 2.7  | 5.7  | 10.0 | 15.4  | 22.7  | 32.9  | 47.5  | 70.4   | 99.9   | 120.1  | 135.4  |
| ▶ 190    | 220   | 200, 250, 300, 350, 400 | 8, 10, 12, 14, 16 |                            |                  | 150            | 60     | 2.5   | 3.6   | 4.9  | 9.1  | 15.3 | 24.1  | 37.0  | 65.7  | 107.3 | 150.5  | 186.4  | 205.5  | 220.8  |
| ▶ 270    | 315   | 250, 300, 350, 400      | 10, 12, 14, 16    |                            |                  | 200            | 60     | 3.6   | 4.6   | 6.0  | 11.0 | 17.7 | 31.0  | 54.8  | 91.8  | 144.1 | 192.9  | 241.6  | 276.1  | 290.2  |
| ▶ 315    | 365   | 250, 300, 350, 400      | 10, 12, 14, 16    |                            |                  | 200            | 60     | 4.2   | 5.6   | 8.4  | 19.7 | 53.3 | 100.0 | 149.0 | 198.6 | 245.9 | 287.8  | 329.0  | 363.0  | 378.0  |
| ▶ 480    | 560   | 300, 350, 400, 500      | 12, 14, 16, 20    |                            |                  | 250            | 120    | 6.3   | 7.0   | 9.1  | 18.4 | 33.7 | 55.2  | 86.6  | 133.0 | 221.8 | 328.4  | 435.9  | 521.4  | 542.0  |
| ▶ 750    | 880   | 350, 400, 500           | 14, 16, 20        |                            |                  | 300            | 120    | 10.0  | 11.4  | 14.6 | 28.4 | 53.2 | 87.2  | 141.6 | 243.0 | 405.0 | 556.4  | 680.2  | 735.0  | 761.5  |
| ▶ 1000   | 1150  | 350, 400, 500           | 14, 16, 20        |                            |                  | 350            | 120    | 13.0  | 14.0  | 16.5 | 37.5 | 72.6 | 123.8 | 241.0 | 402.8 | 586.5 | 768.0  | 918.7  | 1019.8 | 1062.6 |
| ▶ 1250   | 1450  | 500                     | 20                |                            |                  | 400            | 120    | 16.5  | 18.0  | 22.1 | 50.1 | 91.6 | 157.9 | 321.8 | 580.5 | 847.5 | 1025.7 | 1152.8 | 1232.2 | 1280.2 |

**Table 3251.20:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: Perforated plug with flow divider St III, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $K_{vs}$ | $C_v$ | DN                      | NPS               | NR                         | CH     | Seat Ø [mm] | Travel | Travel in % · Flow coefficient ( $K_v$ coefficient) |       |       |       |       |       |        |        |        |        |        |        |        |
|----------|-------|-------------------------|-------------------|----------------------------|--------|-------------|--------|---|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|
|          |       |                         |                   |                            |        |             |        | 0   | 5     | 10    | 20    | 30    | 40    | 50     | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 3      | 3.5   | 50, 80                  | 2, 3              | Perforated plug and St III | Linear | 24          | 15     | 0.040   | 0.25  | 0.41  | 0.76  | 1.2   | 1.6   | 2.0    | 2.5    | 2.9    | 3.4    | 4.1    | 4.7    | 5.3    |
| ▶ 4.8    | 5.6   | 50, 80                  | 2, 3              |                            |        | 24          | 15     | 0.073   | 0.43  | 0.72  | 1.3   | 1.9   | 2.5   | 3.1    | 3.7    | 4.4    | 5.0    | 5.7    | 6.3    | 7.0    |
| ▶ 7.5    | 9     | 80                      | 3                 |                            |        | 31          | 15     | 0.10  | 0.53  | 0.93  | 1.7   | 2.6   | 3.5   | 4.5    | 5.6    | 6.8    | 8.1    | 9.5    | 10.8   | 11.8   |
| ▶ 12     | 14    | 80                      | 3                 |                            |        | 31          | 15     | 0.28  | 1.5   | 2.6   | 4.6   | 6.6   | 8.6   | 10.5   | 12.0   | 13.1   | 14.2   | 15.1   | 16.0   | 16.8   |
| ▶ 20     | 23    | 80, 100                 | 3, 4              |                            |        | 38          | 15     | 0.006   | 1.1   | 2.3   | 5.3   | 8.1   | 11.0  | 13.5   | 16.0   | 17.9   | 19.6   | 20.9   | 22.1   | 23.1   |
| ▶ 30     | 35    | 80, 100                 | 3, 4              |                            |        | 50          | 30     | 0.53  | 2.6   | 4.5   | 8.5   | 13.3  | 18.7  | 23.9   | 28.9   | 33.3   | 37.1   | 40.1   | 42.6   | 44.2   |
| ▶ 47     | 55    | 100, 150                | 4, 6              |                            |        | 63          | 30     | 0.63  | 3.0   | 5.1   | 10.2  | 15.7  | 22.1  | 28.7   | 36.0   | 42.6   | 48.4   | 53.3   | 56.6   | 58.5   |
| ▶ 75     | 90    | 150, 200, 250           | 6, 8, 10          |                            |        | 80          | 30     | 1.0   | 6.9   | 12.1  | 21.4  | 30.8  | 39.5  | 48.3   | 55.9   | 63.3   | 70.4   | 76.5   | 81.3   | 85.2   |
| ▶ 100    | 120   | 150, 200, 250, 300      | 6, 8, 10, 12      |                            |        | 100         | 30     | 0.5   | 5.5   | 10.3  | 20.3  | 32.0  | 43.5  | 54.1   | 63.9   | 72.9   | 81.7   | 89.2   | 96.7   | 103.8  |
| ▶ 190    | 220   | 150, 200, 250, 300      | 6, 8, 10, 12      |                            |        | 125         | 60     | 2.4   | 12.3  | 20.8  | 38.6  | 59.1  | 78.9  | 98.3   | 116.4  | 134.3  | 151.2  | 166.4  | 179.8  | 192.2  |
| ▶ 230    | 270   | 200, 250, 300, 350, 400 | 8, 10, 12, 14, 16 |                            |        | 150         | 60     | 3.2   | 16.5  | 27.4  | 51.7  | 81.5  | 114.6 | 147.6  | 177.8  | 203.5  | 224.2  | 240.4  | 252.7  | 262.3  |
| ▶ 375    | 435   | 250, 300, 350, 400      | 10, 12, 14, 16    |                            |        | 200         | 60     | 7.5   | 19.2  | 36.8  | 80.8  | 130.8 | 178.2 | 223.7  | 265.6  | 301.7  | 333.7  | 359.9  | 379.8  | 395.2  |
| ▶ 675    | 780   | 300, 350, 400, 500      | 12, 14, 16, 20    |                            |        | 250         | 120    | 9.0   | 45.0  | 75.2  | 137.9 | 214.2 | 289.8 | 365.4  | 438.9  | 504.7  | 564.9  | 617.4  | 656.8  | 677.6  |
| ▶ 950    | 1100  | 350, 400, 500           | 14, 16, 20        |                            |        | 300         | 120    | 13.0  | 112.2 | 187.8 | 312.2 | 424.9 | 525.0 | 623.4  | 719.2  | 797.3  | 859.8  | 908.8  | 941.6  | 961.6  |
| ▶ 1275   | 1475  | 350, 400, 500           | 14, 16, 20        |                            |        | 350         | 120    | 17.0  | 88.0  | 152.5 | 289.6 | 433.1 | 584.7 | 748.1  | 899.1  | 1024.2 | 1137.4 | 1235.1 | 1298.7 | 1324.1 |
| ▶ 1600   | 1860  | 500                     | 20                |                            |        | 400         | 120    | 21.0  | 173.4 | 300.6 | 520.4 | 717.5 | 900.8 | 1066.3 | 1242.6 | 1390.8 | 1503.9 | 1592.1 | 1661.4 | 1688.9 |

**Table 3251.21:**  $K_v$  coefficients ( $m^3/h$ ) for Type 3251 Globe Valve: without trim (PN 40)

| Seat Ø<br>[mm] | Flow coefficient $K_v$ without trim |       |       |       |       |        |        |        |        |        |        |        |        |
|----------------|-------------------------------------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
|                | DN 15                               | DN 25 | DN 40 | DN 50 | DN 80 | DN 100 | DN 150 | DN 200 | DN 250 | DN 300 | DN 350 | DN 400 | DN 500 |
| 6              | 1.3                                 | 1.5   | 1.8   | –     | –     | –      | –      | –      | –      | –      | –      | –      | –      |
| 12             | 4.5                                 | 4.9   | 5     | –     | –     | –      | –      | –      | –      | –      | –      | –      | –      |
| 24             | 4.9                                 | 14    | 18    | 21    | 23    | –      | –      | –      | –      | –      | –      | –      | –      |
| 31             | –                                   | –     | 26    | 32    | 36    | –      | –      | –      | –      | –      | –      | –      | –      |
| 38             | –                                   | –     | 30    | 41    | 42    | 45     | –      | –      | –      | –      | –      | –      | –      |
| 50             | –                                   | –     | –     | 50    | 80    | 82     | –      | –      | –      | –      | –      | –      | –      |
| 63             | –                                   | –     | –     | –     | 108   | 122    | 140    | –      | –      | –      | –      | –      | –      |
| 80             | –                                   | –     | –     | –     | 122   | 150    | 215    | 220    | 225    | –      | –      | –      | –      |
| 100            | –                                   | –     | –     | –     | –     | 188    | 234    | 315    | 325    | 330    | –      | –      | –      |
| 125            | –                                   | –     | –     | –     | –     | –      | 333    | 495    | 504    | 511    | –      | –      | –      |
| 150            | –                                   | –     | –     | –     | –     | –      | 402    | 650    | 700    | 710    | 715    | 715    | –      |
| 200            | –                                   | –     | –     | –     | –     | –      | –      | 698    | 1030   | 1180   | 1250   | 1270   | –      |
| 250            | –                                   | –     | –     | –     | –     | –      | –      | –      | 1150   | 1530   | 1850   | 1900   | –      |
| 300            | –                                   | –     | –     | –     | –     | –      | –      | –      | –      | 1650   | 2450   | 2500   | –      |
| 350            | –                                   | –     | –     | –     | –     | –      | –      | –      | –      | –      | 2800   | 2850   | 3500   |
| 400            | –                                   | –     | –     | –     | –     | –      | –      | –      | –      | –      | –      | 2950   | 4100   |
| 500            | –                                   | –     | –     | –     | –     | –      | –      | –      | –      | –      | –      | –      | 4700   |



**Table 3251.22:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: Standard plug without flow divider, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS                  | DN                           | NR      | CH               | Seat Ø [mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |        |        |        |       |        |        |        |        |        |        |        |        |
|--------|----------|----------------------|------------------------------|---------|------------------|-------------|--------|---|--------|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
|        |          |                      |                              |         |                  |             |        | 0   | 5      | 10     | 20     | 30    | 40     | 50     | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 0.12 | 0.1      | ½, 1, 1½             | 15, 25, 40                   | Without | Equal percentage | 6           | 15     | 0.0025  | 0.0033 | 0.0044 | 0.0071 | 0.011 | 0.015  | 0.021  | 0.029  | 0.040  | 0.058  | 0.086  | 0.109  | 0.128  |
| ▶ 0.2  | 0.16     | ½, 1, 1½             | 15, 25, 40                   |         |                  | 6           | 15     | 0.0040  | 0.0053 | 0.0067 | 0.0101 | 0.014 | 0.020  | 0.026  | 0.035  | 0.049  | 0.070  | 0.109  | 0.182  | 0.257  |
| ▶ 0.3  | 0.25     | ½, 1, 1½             | 15, 25, 40                   |         |                  | 6           | 15     | 0.0064  | 0.0071 | 0.0079 | 0.012  | 0.016 | 0.024  | 0.034  | 0.048  | 0.072  | 0.111  | 0.183  | 0.288  | 0.414  |
| ▶ 0.5  | 0.4      | ½, 1, 1½             | 15, 25, 40                   |         |                  | 6           | 15     | 0.0088  | 0.0100 | 0.011  | 0.017  | 0.027 | 0.041  | 0.065  | 0.100  | 0.146  | 0.209  | 0.309  | 0.508  | 1.000  |
| ▶ 0.75 | 0.63     | ½, 1, 1½             | 15, 25, 40                   |         |                  | 6           | 15     | 0.016   | 0.019  | 0.023  | 0.032  | 0.047 | 0.069  | 0.102  | 0.146  | 0.211  | 0.308  | 0.464  | 0.777  | 1.26   |
| ▶ 1.2  | 1        | ½, 1, 1½             | 15, 25, 40                   |         |                  | 6           | 15     | 0.025   | 0.032  | 0.039  | 0.056  | 0.080 | 0.12   | 0.17   | 0.25   | 0.37   | 0.58   | 0.88   | 1.27   | 1.67   |
| ▶ 2    | 1.6      | ½, 1, 1½             | 15, 25, 40                   |         |                  | 12          | 15     | 0.036   | 0.045  | 0.057  | 0.088  | 0.13  | 0.19   | 0.27   | 0.39   | 0.56   | 0.83   | 1.26   | 2.03   | 3.3    |
| ▶ 3    | 2.5      | ½, 1, 1½             | 15, 25, 40                   |         |                  | 12          | 15     | 0.059   | 0.070  | 0.085  | 0.13   | 0.19  | 0.29   | 0.43   | 0.63   | 0.93   | 1.38   | 2.06   | 3.0    | 4.1    |
| ▶ 5    | 4        | ½, 1, 1½, 2, 3       | 12, 25, 40, 50, 80           |         |                  | 24          | 15     | 0.090   | 0.11   | 0.13   | 0.20   | 0.28  | 0.41   | 0.57   | 0.81   | 1.23   | 1.90   | 3.1    | 5.0    | 7.4    |
| ▶ 7.5  | 6.3      | 1, 1½, 2, 3          | 25, 40, 50, 80               |         |                  | 24          | 15     | 0.16  | 0.20   | 0.25   | 0.38   | 0.56  | 0.80   | 1.14   | 1.68   | 2.5    | 3.7    | 5.4    | 7.7    | 10.0   |
| ▶ 12   | 10       | 1, 1½, 2, 3          | 25, 40, 50, 80               |         |                  | 24          | 15     | 0.25  | 0.32   | 0.42   | 0.65   | 0.94  | 1.30   | 1.78   | 2.5    | 3.6    | 5.2    | 7.7    | 10.9   | 12.4   |
| ▶ 20   | 16       | 1½, 2, 3             | 40, 50, 80                   |         |                  | 31          | 15     | 0.39  | 0.52   | 0.65   | 1.01   | 1.47  | 2.11   | 3.0    | 4.4    | 6.9    | 11.3   | 15.6   | 19.1   | 21.6   |
| ▶ 30   | 25       | 1½, 2, 3, 4          | 40, 50, 80, 100              |         |                  | 38          | 15     | 0.46  | 0.61   | 0.76   | 1.12   | 1.67  | 2.6    | 4.5    | 7.9    | 12.9   | 17.9   | 22.8   | 27.3   | 30.7   |
| ▶ 47   | 40       | 2, 3, 4              | 50, 80, 100                  |         |                  | 50          | 30     | 0.73  | 0.98   | 1.32   | 2.07   | 3.0   | 4.2    | 6.4    | 9.7    | 14.6   | 22.1   | 32.2   | 43.5   | 52.3   |
| ▶ 75   | 63       | 3, 4, 6              | 80, 100, 150                 |         |                  | 63          | 30     | 1.39  | 1.55   | 1.76   | 2.6    | 3.9   | 5.8    | 8.7    | 13.7   | 21.6   | 34.2   | 50.4   | 67.6   | 77.8   |
| ▶ 120  | 100      | 3, 4, 6, 8, 10       | 80, 100, 150, 200, 250       |         |                  | 80          | 30     | 1.60  | 1.92   | 2.5    | 4.0    | 6.6   | 10.7   | 17.0   | 27.1   | 43.8   | 68.0   | 90.5   | 108.5  | 120.7  |
| ▶ 190  | 160      | 4, 6, 8, 10, 12      | 100, 150, 200, 250, 300      |         |                  | 100         | 30     | 3.0   | 4.0    | 5.5    | 8.8    | 13.2  | 19.5   | 33.1   | 55.2   | 83.4   | 112.6  | 143.6  | 171.4  | 191.6  |
| ▶ 290  | 250      | 6, 8, 10, 12         | 150, 200, 250, 300           |         |                  | 125         | 60     | 4.7   | 6.5    | 8.3    | 13.6   | 21.1  | 31.1   | 44.3   | 64.6   | 102.9  | 177.4  | 245.6  | 302.5  | 339.3  |
| ▶ 420  | 360      | 6, 8, 10, 12, 14, 16 | 150, 200, 250, 300, 350, 399 |         |                  | 150         | 60     | 6.6   | 8.7    | 11.9   | 18.7   | 27.8  | 41.0   | 59.6   | 94.6   | 162.3  | 252.4  | 333.8  | 399.8  | 441.5  |
| ▶ 735  | 630      | 8, 10, 12, 14, 16    | 200, 250, 300, 350, 400      |         |                  | 200         | 60     | 10.9  | 17.3   | 23.1   | 42.0   | 83.0  | 152.1  | 257.4  | 378.8  | 484.9  | 575.8  | 648.9  | 696.1  | 723.2  |
| ▶ 1150 | 1000     | 10, 12, 14, 16, 20   | 250, 300, 350, 400, 500      |         |                  | 250         | 120    | 17.9  | 25.1   | 35.3   | 59.3   | 91.8  | 136.8  | 205.6  | 301.1  | 462.3  | 707.7  | 975.6  | 1241.9 | 1369.5 |
| ▶ 1730 | 1500     | 12, 14, 16, 20       | 300, 350, 400, 500           |         |                  | 300         | 120    | 23.2  | 35.9   | 50.5   | 84.8   | 131.2 | 195.6  | 294.0  | 430.5  | 661.1  | 1012.0 | 1395.1 | 1775.9 | 1958.4 |
| ▶ 2300 | 2000     | 14, 16, 20           | 350, 400, 500                |         |                  | 350         | 120    | 32.2  | 45.2   | 63.5   | 106.8  | 165.2 | 246.3  | 370.0  | 541.9  | 832.1  | 1273.9 | 1756.0 | 2235.4 | 2465.1 |
| ▶ 2900 | 2500     | 16, 20               | 400, 500                     |         |                  | 400         | 120    | 40.6  | 56.9   | 80.1   | 134.6  | 208.3 | 310.5  | 466.6  | 683.3  | 1049.2 | 1606.2 | 2214.0 | 2818.5 | 3108.0 |
| ▶ 4700 | 4000     | 20                   | 500                          | 500     | 120              | 62.5        | 87.8   | 123.5   | 207.6  | 321.2  | 478.9  | 719.5 | 1053.7 | 1618.0 | 2477.0 | 3414.5 | 4346.7 | 4793.2 |        |        |

**Table 3251.23:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: Standard plug without flow divider, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS                  | DN                           | NR      | CH     | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient (CV coefficient) |        |        |        |        |        |        |        |        |        |        |        |        |
|--------|----------|----------------------|------------------------------|---------|--------|----------------|--------|---|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
|        |          |                      |                              |         |        |                |        | 0   | 5      | 10     | 20     | 30     | 40     | 50     | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 0.12 | 0.1      | ½, 1, 1½             | 15, 25, 40                   | Without | Linear | 6              | 15     | 0.0025  | 0.0077 | 0.013  | 0.024  | 0.035  | 0.045  | 0.056  | 0.067  | 0.077  | 0.088  | 0.098  | 0.109  | 0.119  |
| ▶ 0.2  | 0.16     | ½, 1, 1½             | 15, 25, 40                   |         |        | 6              | 15     | 0.0040  | 0.0068 | 0.013  | 0.028  | 0.047  | 0.066  | 0.085  | 0.104  | 0.123  | 0.142  | 0.161  | 0.180  | 0.199  |
| ▶ 0.3  | 0.25     | ½, 1, 1½             | 15, 25, 40                   |         |        | 6              | 15     | 0.0045  | 0.013  | 0.026  | 0.053  | 0.081  | 0.108  | 0.136  | 0.163  | 0.191  | 0.218  | 0.246  | 0.273  | 0.301  |
| ▶ 0.5  | 0.4      | ½, 1, 1½             | 15, 25, 40                   |         |        | 6              | 15     | 0.0101  | 0.023  | 0.044  | 0.092  | 0.142  | 0.191  | 0.241  | 0.291  | 0.341  | 0.391  | 0.440  | 0.490  | 0.540  |
| ▶ 0.75 | 0.63     | ½, 1, 1½             | 15, 25, 40                   |         |        | 6              | 15     | 0.016   | 0.046  | 0.079  | 0.157  | 0.237  | 0.318  | 0.398  | 0.479  | 0.559  | 0.639  | 0.720  | 0.800  | 0.880  |
| ▶ 1.2  | 1        | ½, 1, 1½             | 15, 25, 40                   |         |        | 6              | 15     | 0.022   | 0.114  | 0.195  | 0.321  | 0.440  | 0.559  | 0.677  | 0.796  | 0.915  | 1.034  | 1.15   | 1.27   | 1.39   |
| ▶ 2    | 1.6      | ½, 1, 1½             | 15, 25, 40                   |         |        | 12             | 15     | 0.040   | 0.13   | 0.22   | 0.41   | 0.61   | 0.81   | 1.01   | 1.21   | 1.41   | 1.60   | 1.80   | 2.00   | 2.20   |
| ▶ 3    | 2.5      | ½, 1, 1½             | 15, 25, 40                   |         |        | 12             | 15     | 0.049   | 0.19   | 0.34   | 0.62   | 0.93   | 1.23   | 1.54   | 1.85   | 2.16   | 2.5    | 2.8    | 3.1    | 3.4    |
| ▶ 5    | 4        | ½, 1, 1½, 2, 3       | 15, 25, 40, 50, 80           |         |        | 24             | 15     | 0.046   | 0.14   | 0.38   | 0.91   | 1.44   | 1.96   | 2.5    | 3.0    | 3.5    | 4.0    | 4.6    | 5.1    | 5.6    |
| ▶ 7.5  | 6.3      | 1, 1½, 2, 3          | 25, 40, 50, 80               |         |        | 24             | 15     | 0.112   | 0.36   | 0.76   | 1.56   | 2.4    | 3.2    | 4.0    | 4.8    | 5.6    | 6.4    | 7.2    | 8.0    | 8.8    |
| ▶ 12   | 10       | 1, 1½, 2, 3          | 25, 40, 50, 80               |         |        | 24             | 15     | 0.18  | 0.71   | 1.30   | 2.6    | 3.8    | 5.1    | 6.4    | 7.6    | 8.9    | 10.2   | 11.4   | 12.7   | 14.0   |
| ▶ 20   | 16       | 1½, 2, 3             | 40, 50, 80                   |         |        | 31             | 15     | 0.22  | 1.10   | 2.07   | 4.1    | 6.1    | 8.1    | 10.1   | 12.2   | 14.2   | 16.2   | 18.2   | 20.2   | 22.3   |
| ▶ 30   | 25       | 1½, 2, 3, 4          | 40, 50, 80, 100              |         |        | 38             | 15     | 0.37  | 0.94   | 1.77   | 4.6    | 7.5    | 10.4   | 13.3   | 16.3   | 19.2   | 22.1   | 25.0   | 27.9   | 30.9   |
| ▶ 47   | 40       | 2, 3, 4              | 50, 80, 100                  |         |        | 50             | 30     | 0.63  | 1.72   | 3.7    | 9.0    | 14.0   | 19.0   | 24.0   | 29.0   | 34.0   | 39.0   | 44.0   | 49.0   | 54.0   |
| ▶ 75   | 63       | 3, 4, 6              | 80, 100, 150                 |         |        | 63             | 30     | 1.18  | 2.03   | 4.7    | 12.8   | 21.0   | 29.2   | 37.3   | 45.5   | 53.7   | 61.8   | 70.0   | 78.2   | 86.3   |
| ▶ 120  | 100      | 3, 4, 6, 8, 10       | 80, 100, 150, 200, 250       |         |        | 80             | 30     | 0.85  | 2.6    | 7.2    | 20.0   | 32.7   | 45.3   | 57.9   | 70.6   | 83.2   | 95.8   | 108.5  | 121.1  | 133.7  |
| ▶ 190  | 160      | 4, 6, 8, 10, 12      | 100, 150, 200, 250, 300      |         |        | 100            | 30     | 2.2   | 4.7    | 12.1   | 29.2   | 47.4   | 65.5   | 83.6   | 101.7  | 119.8  | 138.0  | 156.1  | 174.2  | 190.7  |
| ▶ 290  | 250      | 6, 8, 10, 12         | 150, 200, 250, 300           |         |        | 125            | 60     | 4.1   | 7.3    | 20.4   | 53.6   | 86.7   | 119.7  | 152.7  | 185.8  | 218.8  | 251.8  | 284.9  | 317.9  | 350.9  |
| ▶ 420  | 360      | 6, 8, 10, 12, 14, 16 | 150, 200, 250, 300, 350, 399 |         |        | 150            | 60     | 5.0   | 14.2   | 36.2   | 75.3   | 117.0  | 156.5  | 195.9  | 235.3  | 274.8  | 314.2  | 353.6  | 393.1  | 419.2  |
| ▶ 735  | 630      | 8, 10, 12, 14, 16    | 200, 250, 300, 350, 400      |         |        | 200            | 60     | 11.7  | 33.5   | 67.3   | 139.7  | 210.6  | 281.6  | 352.6  | 423.6  | 494.6  | 565.5  | 636.5  | 707.5  | 754.6  |
| ▶ 1150 | 1000     | 10, 12, 14, 16, 20   | 250, 300, 350, 400, 500      |         |        | 250            | 120    | 17.4  | 32.0   | 84.7   | 211.3  | 341.4  | 471.6  | 601.7  | 731.9  | 862.0  | 992.2  | 1122.3 | 1252.5 | 1382.6 |
| ▶ 1730 | 1500     | 12, 14, 16, 20       | 300, 350, 400, 500           |         |        | 300            | 120    | 26.4  | 83.4   | 168.5  | 356.9  | 538.3  | 719.7  | 901.1  | 1082.5 | 1263.9 | 1445.3 | 1626.7 | 1808.1 | 1941.3 |
| ▶ 2300 | 2000     | 14, 16, 20           | 350, 400, 500                |         |        | 350            | 120    | 34.9  | 69.0   | 155.2  | 375.4  | 606.6  | 837.9  | 1069.1 | 1300.3 | 1531.5 | 1762.7 | 1994.0 | 2225.2 | 2456.4 |
| ▶ 2900 | 2500     | 16, 20               | 400, 500                     |         |        | 400            | 120    | 42.3  | 132.2  | 265.2  | 550.3  | 830.0  | 1109.7 | 1389.4 | 1669.1 | 1948.8 | 2228.5 | 2508.2 | 2788.0 | 2993.7 |
| ▶ 4700 | 4000     | 20                   | 500                          | 500     | 120    | 68.0           | 212.4  | 426.2   | 884.5  | 1334.0 | 1783.6 | 2233.1 | 2682.7 | 3132.2 | 3581.8 | 4031.3 | 4480.8 | 4799.1 |        |        |

**Table 3251.24:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: Standard plug with flow divider St 1, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS                  | DN                           | NR   | CH               | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |       |       |       |       |       |        |        |        |        |        |        |
|--------|----------|----------------------|------------------------------|------|------------------|----------------|--------|---|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|
|        |          |                      |                              |      |                  |                |        | 0   | 5     | 10    | 20    | 30    | 40    | 50    | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 1.7  | 1.45     | ½, 1, 1½             | 15, 25, 40                   | St 1 | Equal percentage | 12             | 15     | 0.036   | 0.045 | 0.057 | 0.088 | 0.13  | 0.19  | 0.27  | 0.39   | 0.56   | 0.83   | 1.25   | 2.01   | 3.3    |
| ▶ 2.6  | 2.2      | ½, 1, 1½             | 15, 25, 40                   |      |                  | 12             | 15     | 0.059   | 0.070 | 0.085 | 0.13  | 0.19  | 0.29  | 0.43  | 0.63   | 0.93   | 1.37   | 2.04   | 2.9    | 4.0    |
| ▶ 4.2  | 3.6      | ½, 1, 1½, 2, 3       | 15, 25, 40, 50, 80           |      |                  | 24             | 15     | 0.090   | 0.108 | 0.13  | 0.20  | 0.28  | 0.41  | 0.57  | 0.81   | 1.22   | 1.89   | 3.0    | 5.0    | 7.3    |
| ▶ 7    | 5.7      | 1, 1½, 2, 3          | 25, 40, 50, 80               |      |                  | 24             | 15     | 0.16  | 0.20  | 0.25  | 0.38  | 0.56  | 0.80  | 1.14  | 1.68   | 2.5    | 3.7    | 5.4    | 7.7    | 9.9    |
| ▶ 10.5 | 9        | 1, 1½, 2, 3          | 25, 40, 50, 80               |      |                  | 24             | 15     | 0.25  | 0.32  | 0.42  | 0.65  | 0.94  | 1.30  | 1.78  | 2.5    | 3.6    | 5.2    | 7.6    | 10.8   | 12.3   |
| ▶ 17   | 14.5     | 1½, 2, 3             | 40, 50, 80                   |      |                  | 31             | 15     | 0.39  | 0.52  | 0.65  | 1.01  | 1.47  | 2.11  | 3.0   | 4.4    | 6.9    | 11.3   | 15.4   | 18.9   | 21.4   |
| ▶ 26   | 22       | 1½, 2, 3, 4          | 40, 50, 80, 100              |      |                  | 38             | 15     | 0.46  | 0.61  | 0.76  | 1.12  | 1.67  | 2.6   | 4.5   | 7.9    | 12.7   | 17.3   | 21.8   | 25.7   | 28.6   |
| ▶ 42   | 36       | 2, 3, 4              | 50, 80, 100                  |      |                  | 50             | 30     | 0.73  | 0.98  | 1.32  | 2.07  | 3.0   | 4.2   | 6.4   | 9.7    | 14.3   | 21.3   | 30.8   | 40.9   | 48.9   |
| ▶ 67   | 57       | 3, 4, 6              | 80, 100, 150                 |      |                  | 63             | 30     | 1.4   | 1.5   | 1.8   | 2.6   | 3.9   | 5.8   | 8.7   | 13.7   | 20.9   | 32.4   | 46.6   | 60.8   | 69.2   |
| ▶ 105  | 90       | 3, 4, 6, 8, 10       | 80, 100, 150, 200, 250       |      |                  | 80             | 30     | 1.6   | 1.9   | 2.5   | 4.0   | 6.6   | 10.7  | 17.0  | 27.1   | 42.1   | 63.1   | 81.6   | 94.6   | 105.1  |
| ▶ 170  | 144      | 4, 6, 8, 10, 12      | 100, 150, 200, 250, 300      |      |                  | 100            | 30     | 3.0   | 4.0   | 5.5   | 8.8   | 13.2  | 19.5  | 33.1  | 55.2   | 80.7   | 105.8  | 131.7  | 153.1  | 170.7  |
| ▶ 265  | 225      | 6, 8, 10, 12         | 150, 200, 250, 300           |      |                  | 125            | 60     | 4.7   | 6.5   | 8.3   | 13.6  | 21.1  | 31.1  | 44.3  | 63.3   | 98.6   | 158.7  | 206.9  | 239.0  | 260.8  |
| ▶ 375  | 320      | 6, 8, 10, 12, 14, 16 | 150, 200, 250, 300, 350, 400 |      |                  | 150            | 60     | 6.6   | 8.7   | 11.9  | 18.7  | 27.8  | 41.0  | 59.6  | 94.6   | 158.4  | 241.3  | 313.8  | 367.8  | 402.6  |
| ▶ 650  | 560      | 8, 10, 12, 14, 16    | 200, 250, 300, 350, 400      |      |                  | 200            | 60     | 10.9  | 17.3  | 23.1  | 39.1  | 77.2  | 141.4 | 239.4 | 352.2  | 450.9  | 535.5  | 603.5  | 647.4  | 672.6  |
| ▶ 1040 | 900      | 10, 12, 14, 16, 20   | 250, 300, 350, 400, 500      |      |                  | 250            | 120    | 17.9  | 25.1  | 35.3  | 59.3  | 91.8  | 136.8 | 205.6 | 301.1  | 451.2  | 676.6  | 917.0  | 1142.6 | 1249.0 |
| ▶ 1560 | 1350     | 12, 14, 16, 20       | 300, 350, 400, 500           |      |                  | 300            | 120    | 23.2  | 35.9  | 50.5  | 84.8  | 131.2 | 195.6 | 294.0 | 430.5  | 645.2  | 967.5  | 1311.3 | 1633.8 | 1786.0 |
| ▶ 2080 | 1800     | 14, 16, 20           | 350, 400, 500                |      |                  | 350            | 120    | 32.2  | 45.2  | 63.5  | 106.8 | 165.2 | 246.3 | 370.0 | 541.9  | 812.1  | 1217.8 | 1650.6 | 2056.6 | 2248.1 |
| ▶ 2600 | 2250     | 16, 20               | 400, 500                     |      |                  | 400            | 120    | 40.6  | 56.9  | 80.1  | 134.6 | 208.3 | 310.5 | 466.6 | 683.3  | 1024.0 | 1535.5 | 2081.2 | 2593.0 | 2834.5 |
| ▶ 4200 | 3600     | 20                   | 500                          |      |                  | 500            | 120    | 62.5  | 87.8  | 123.5 | 207.6 | 321.2 | 478.9 | 719.5 | 1053.7 | 1579.2 | 2368.0 | 3209.6 | 3998.9 | 4371.4 |

**Table 3251.25:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: Standard plug with flow divider St I, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS                  | DN                           | NR   | CH     | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |       |       |        |        |        |        |        |        |        |        |        |
|--------|----------|----------------------|------------------------------|------|--------|----------------|--------|---|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
|        |          |                      |                              |      |        |                |        | 0   | 5     | 10    | 20    | 30     | 40     | 50     | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 1.7  | 1.45     | ½, 1, 1½             | 15, 25, 40                   | St I | Linear | 12             | 15     | 0.040   | 0.13  | 0.22  | 0.41  | 0.61   | 0.80   | 1.00   | 1.20   | 1.39   | 1.59   | 1.79   | 1.98   | 2.2    |
| ▶ 2.6  | 2.2      | ½, 1, 1½             | 15, 25, 40                   |      |        | 12             | 15     | 0.049   | 0.19  | 0.34  | 0.62  | 0.92   | 1.22   | 1.53   | 1.83   | 2.13   | 2.4    | 2.7    | 3.0    | 3.3    |
| ▶ 4.2  | 3.6      | ½, 1, 1½, 2, 3       | 15, 25, 40, 50, 80           |      |        | 24             | 15     | 0.046   | 0.14  | 0.38  | 0.91  | 1.42   | 1.94   | 2.5    | 3.0    | 3.5    | 4.0    | 4.5    | 5.0    | 5.6    |
| ▶ 7    | 5.7      | 1, 1½, 2, 3          | 25, 40, 50, 80               |      |        | 24             | 15     | 0.112   | 0.36  | 0.76  | 1.55  | 2.3    | 3.1    | 3.9    | 4.7    | 5.5    | 6.3    | 7.1    | 7.9    | 8.7    |
| ▶ 10.5 | 9        | 1, 1½, 2, 3          | 25, 40, 50, 80               |      |        | 24             | 15     | 0.18  | 0.71  | 1.30  | 2.5   | 3.8    | 5.0    | 6.3    | 7.6    | 8.8    | 10.1   | 11.3   | 12.6   | 13.8   |
| ▶ 17   | 14.5     | 1½, 2, 3             | 40, 50, 80                   |      |        | 31             | 15     | 0.22  | 1.10  | 2.07  | 4.0   | 6.0    | 8.0    | 10.0   | 12.0   | 14.0   | 16.0   | 18.0   | 20.0   | 22.0   |
| ▶ 26   | 22       | 1½, 2, 3, 4          | 40, 50, 80, 100              |      |        | 38             | 15     | 0.37  | 0.94  | 1.77  | 4.2   | 6.8    | 9.5    | 12.1   | 14.8   | 17.5   | 20.1   | 22.8   | 25.4   | 28.1   |
| ▶ 42   | 36       | 2, 3, 4              | 50, 80, 100                  |      |        | 50             | 30     | 0.63  | 1.72  | 3.7   | 8.4   | 13.0   | 17.7   | 22.3   | 27.0   | 31.7   | 36.3   | 41.0   | 45.6   | 50.3   |
| ▶ 67   | 57       | 3, 4, 6              | 80, 100, 150                 |      |        | 63             | 30     | 1.18  | 2.03  | 4.7   | 11.3  | 18.5   | 25.7   | 32.9   | 40.0   | 47.2   | 54.4   | 61.6   | 68.8   | 76.0   |
| ▶ 105  | 90       | 3, 4, 6, 8, 10       | 80, 100, 150, 200, 250       |      |        | 80             | 30     | 0.85  | 2.6   | 6.5   | 16.6  | 27.1   | 37.6   | 48.1   | 58.6   | 69.1   | 79.5   | 90.0   | 100.5  | 111.0  |
| ▶ 170  | 144      | 4, 6, 8, 10, 12      | 100, 150, 200, 250, 300      |      |        | 100            | 30     | 2.21  | 4.7   | 11.4  | 26.3  | 42.6   | 58.9   | 75.2   | 91.6   | 107.9  | 124.2  | 140.5  | 156.8  | 171.6  |
| ▶ 265  | 225      | 6, 8, 10, 12         | 150, 200, 250, 300           |      |        | 125            | 60     | 4.09  | 7.31  | 17.92 | 42.90 | 69.33  | 95.75  | 122.18 | 148.6  | 175.0  | 201.5  | 227.9  | 254.3  | 280.7  |
| ▶ 375  | 320      | 6, 8, 10, 12, 14, 16 | 150, 200, 250, 300, 350, 400 |      |        | 150            | 60     | 5.0   | 14.2  | 33.3  | 69.3  | 107.7  | 143.9  | 180.2  | 216.5  | 252.8  | 289.1  | 325.3  | 361.6  | 385.7  |
| ▶ 650  | 560      | 8, 10, 12, 14, 16    | 200, 250, 300, 350, 400      |      |        | 200            | 60     | 11.7  | 33.5  | 64.5  | 129.9 | 195.9  | 261.9  | 327.9  | 393.9  | 459.9  | 526.0  | 592.0  | 658.0  | 701.8  |
| ▶ 1040 | 900      | 10, 12, 14, 16, 20   | 250, 300, 350, 400, 500      |      |        | 250            | 120    | 17.4  | 32.0  | 80.1  | 192.3 | 310.7  | 429.1  | 547.6  | 666.0  | 784.4  | 902.9  | 1021.3 | 1139.7 | 1258.2 |
| ▶ 1560 | 1350     | 12, 14, 16, 20       | 300, 350, 400, 500           |      |        | 300            | 120    | 26.4  | 83.4  | 160.4 | 328.3 | 495.2  | 662.1  | 829.0  | 995.9  | 1162.8 | 1329.6 | 1496.5 | 1663.4 | 1786.0 |
| ▶ 2080 | 1800     | 14, 16, 20           | 350, 400, 500                |      |        | 350            | 120    | 34.9  | 69.0  | 147.8 | 345.4 | 558.1  | 770.8  | 983.6  | 1196.3 | 1409.0 | 1621.7 | 1834.5 | 2047.2 | 2259.9 |
| ▶ 2600 | 2250     | 16, 20               | 400, 500                     |      |        | 400            | 120    | 42.3  | 132.2 | 252.5 | 506.3 | 763.6  | 1020.9 | 1278.3 | 1535.6 | 1792.9 | 2050.3 | 2307.6 | 2564.9 | 2754.2 |
| ▶ 4200 | 3600     | 20                   | 500                          |      |        | 500            | 120    | 68.0  | 212.4 | 405.8 | 813.7 | 1227.3 | 1640.9 | 2054.5 | 2468.0 | 2881.6 | 3295.2 | 3708.8 | 4122.4 | 4415.2 |

**Table 3251.26:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: Standard plug with flow divider St II, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS                  | DN                           | NR    | CH               | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |       |       |       |       |       |       |        |        |        |        |        |
|--------|----------|----------------------|------------------------------|-------|------------------|----------------|--------|---|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|
|        |          |                      |                              |       |                  |                |        | 0   | 5     | 10    | 20    | 30    | 40    | 50    | 60    | 70     | 80     | 90     | 100    | 110    |
| ▶ 3.7  | 3.2      | 2, 3                 | 50, 80                       | St II | Equal percentage | 24             | 15     | 0.090   | 0.108 | 0.132 | 0.196 | 0.28  | 0.41  | 0.57  | 0.81  | 1.22   | 1.88   | 3.01   | 4.90   | 7.2    |
| ▶ 6    | 5        | 2, 3                 | 50, 80                       |       |                  | 24             | 15     | 0.16  | 0.20  | 0.25  | 0.38  | 0.56  | 0.80  | 1.14  | 1.68  | 2.5    | 3.6    | 5.4    | 7.6    | 9.8    |
| ▶ 9.5  | 8        | 2, 3                 | 50, 80                       |       |                  | 24             | 15     | 0.25  | 0.32  | 0.42  | 0.65  | 0.94  | 1.30  | 1.78  | 2.5   | 3.6    | 5.1    | 7.5    | 10.6   | 12.1   |
| ▶ 15   | 13       | 2, 3                 | 50, 80                       |       |                  | 31             | 15     | 0.39  | 0.52  | 0.65  | 1.01  | 1.47  | 2.11  | 3.0   | 4.4   | 6.9    | 11.2   | 15.3   | 18.7   | 21.2   |
| ▶ 23   | 20       | 2, 3, 4              | 50, 80, 100                  |       |                  | 38             | 15     | 0.46  | 0.61  | 0.76  | 1.12  | 1.67  | 2.6   | 4.5   | 7.9   | 12.6   | 17.2   | 21.6   | 25.4   | 28.3   |
| ▶ 37   | 32       | 2, 3, 4              | 50, 80, 100                  |       |                  | 50             | 30     | 0.73  | 0.98  | 1.32  | 2.07  | 3.0   | 4.2   | 6.4   | 9.7   | 14.3   | 21.2   | 30.5   | 40.4   | 48.3   |
| ▶ 60   | 50       | 3, 4, 6              | 80, 100, 150                 |       |                  | 63             | 30     | 1.4   | 1.5   | 1.8   | 2.6   | 3.9   | 5.8   | 8.7   | 13.7  | 20.9   | 32.2   | 46.2   | 60.1   | 68.4   |
| ▶ 95   | 80       | 3, 4, 6, 8, 10       | 80, 100, 150, 200, 250       |       |                  | 80             | 30     | 1.6   | 1.9   | 2.5   | 4.0   | 6.6   | 10.7  | 17.0  | 26.6  | 42.2   | 61.8   | 78.2   | 88.9   | 95.7   |
| ▶ 145  | 125      | 4, 6, 8, 10, 12      | 100, 150, 200, 250, 300      |       |                  | 100            | 30     | 3.0   | 4.0   | 5.5   | 8.8   | 13.2  | 19.5  | 33.1  | 54.2  | 80.4   | 102.4  | 124.2  | 140.5  | 151.9  |
| ▶ 235  | 200      | 6, 8, 10, 12         | 150, 200, 250, 300           |       |                  | 125            | 60     | 4.7   | 6.5   | 8.3   | 13.6  | 21.1  | 31.1  | 44.3  | 62.9  | 97.5   | 154.3  | 197.7  | 223.9  | 237.9  |
| ▶ 335  | 290      | 6, 8, 10, 12, 14, 16 | 150, 200, 250, 300, 350, 400 |       |                  | 150            | 60     | 6.6   | 8.7   | 11.9  | 18.7  | 27.8  | 41.0  | 59.6  | 93.1  | 157.1  | 232.2  | 293.8  | 335.8  | 360.3  |
| ▶ 580  | 500      | 8, 10, 12, 14, 16    | 200, 250, 300, 350, 400      |       |                  | 200            | 60     | 10.9  | 17.3  | 23.1  | 36.1  | 71.4  | 130.8 | 221.4 | 325.7 | 417.0  | 495.2  | 558.1  | 598.7  | 622.0  |
| ▶ 950  | 800      | 10, 12, 14, 16, 20   | 250, 300, 350, 400, 500      |       |                  | 250            | 120    | 17.9  | 25.1  | 35.3  | 59.3  | 91.8  | 136.8 | 205.6 | 296.2 | 447.5  | 651.1  | 858.5  | 1043.2 | 1117.5 |
| ▶ 1400 | 1200     | 12, 14, 16, 20       | 300, 350, 400, 500           |       |                  | 300            | 120    | 23.2  | 35.9  | 50.5  | 84.8  | 131.2 | 195.6 | 294.0 | 423.6 | 639.9  | 931.1  | 1227.6 | 1491.8 | 1598.0 |
| ▶ 1860 | 1600     | 14, 16, 20           | 350, 400, 500                |       |                  | 350            | 120    | 32.2  | 45.2  | 63.5  | 106.8 | 165.2 | 246.3 | 370.0 | 533.2 | 805.5  | 1172.0 | 1545.3 | 1877.8 | 2011.5 |
| ▶ 2300 | 2000     | 16, 20               | 400, 500                     |       |                  | 400            | 120    | 40.6  | 56.9  | 80.1  | 134.6 | 208.3 | 310.5 | 466.6 | 672.3 | 1015.6 | 1477.7 | 1948.4 | 2367.5 | 2536.2 |

**Table 3251.27:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: Standard plug with flow divider St II, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS                  | DN                           | NR    | CH     | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |       |       |       |       |        |        |        |        |        |        |        |
|--------|----------|----------------------|------------------------------|-------|--------|----------------|--------|---|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|
|        |          |                      |                              |       |        |                |        | 0   | 5     | 10    | 20    | 30    | 40    | 50     | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 3.7  | 3.2      | 2, 3                 | 50, 80                       | St II | Linear | 24             | 15     | 0.046   | 0.142 | 0.375 | 0.896 | 1.41  | 1.92  | 2.43   | 2.94   | 3.45   | 3.96   | 4.47   | 4.98   | 5.5    |
| ▶ 6    | 5        | 2, 3                 | 50, 80                       |       |        | 24             | 15     | 0.11  | 0.36  | 0.76  | 1.53  | 2.32  | 3.11  | 3.89   | 4.68   | 5.5    | 6.3    | 7.0    | 7.8    | 8.6    |
| ▶ 9.5  | 8        | 2, 3                 | 50, 80                       |       |        | 24             | 15     | 0.18  | 0.71  | 1.30  | 2.51  | 3.76  | 5.00  | 6.24   | 7.5    | 8.7    | 10.0   | 11.2   | 12.5   | 13.7   |
| ▶ 15   | 13       | 2, 3                 | 50, 80                       |       |        | 31             | 15     | 0.22  | 1.10  | 2.07  | 4.01  | 5.99  | 7.97  | 9.9    | 11.9   | 13.9   | 15.9   | 17.9   | 19.8   | 21.8   |
| ▶ 23   | 20       | 2, 3, 4              | 50, 80, 100                  |       |        | 38             | 15     | 0.37  | 0.94  | 1.77  | 4.12  | 6.75  | 9.4   | 12.0   | 14.6   | 17.3   | 19.9   | 22.5   | 25.2   | 27.8   |
| ▶ 37   | 32       | 2, 3, 4              | 50, 80, 100                  |       |        | 50             | 30     | 0.63  | 1.72  | 3.74  | 8.30  | 12.9  | 17.5  | 22.1   | 26.7   | 31.3   | 35.9   | 40.5   | 45.1   | 49.7   |
| ▶ 60   | 50       | 3, 4, 6              | 80, 100, 150                 |       |        | 63             | 30     | 1.2   | 2.0   | 4.7   | 11.2  | 18.3  | 25.4  | 32.5   | 39.6   | 46.7   | 53.8   | 60.9   | 68.0   | 75.1   |
| ▶ 95   | 80       | 3, 4, 6, 8, 10       | 80, 100, 150, 200, 250       |       |        | 80             | 30     | 0.9   | 2.6   | 6.3   | 15.6  | 25.5  | 35.3  | 45.2   | 55.0   | 64.9   | 74.8   | 84.6   | 94.5   | 104.3  |
| ▶ 145  | 125      | 4, 6, 8, 10, 12      | 100, 150, 200, 250, 300      |       |        | 100            | 30     | 2.2   | 4.7   | 10.8  | 24.0  | 38.8  | 53.7  | 68.6   | 83.4   | 98.3   | 113.1  | 128.0  | 142.9  | 156.3  |
| ▶ 235  | 200      | 6, 8, 10, 12         | 150, 200, 250, 300           |       |        | 125            | 60     | 4.1   | 7.3   | 17.2  | 39.7  | 64.1  | 88.6  | 113.0  | 137.5  | 161.9  | 186.3  | 210.8  | 235.2  | 259.7  |
| ▶ 335  | 290      | 6, 8, 10, 12, 14, 16 | 150, 200, 250, 300, 350, 400 |       |        | 150            | 60     | 5.0   | 14.2  | 30.4  | 63.2  | 98.3  | 131.4 | 164.5  | 197.7  | 230.8  | 263.9  | 297.0  | 330.2  | 352.2  |
| ▶ 580  | 500      | 8, 10, 12, 14, 16    | 200, 250, 300, 350, 400      |       |        | 200            | 60     | 11.7  | 33.5  | 61.6  | 120.1 | 181.1 | 242.2 | 303.2  | 364.3  | 425.3  | 486.4  | 547.4  | 608.5  | 649.0  |
| ▶ 950  | 800      | 10, 12, 14, 16, 20   | 250, 300, 350, 400, 500      |       |        | 250            | 120    | 17.4  | 32.0  | 75.6  | 173.3 | 280.0 | 386.7 | 493.4  | 600.1  | 706.9  | 813.6  | 920.3  | 1027.0 | 1133.7 |
| ▶ 1400 | 1200     | 12, 14, 16, 20       | 300, 350, 400, 500           |       |        | 300            | 120    | 26.4  | 83.4  | 152.3 | 299.8 | 452.2 | 604.5 | 756.9  | 909.3  | 1061.7 | 1214.0 | 1366.4 | 1518.8 | 1630.7 |
| ▶ 1860 | 1600     | 14, 16, 20           | 350, 400, 500                |       |        | 350            | 120    | 34.9  | 69.0  | 140.3 | 315.3 | 509.6 | 703.8 | 898.0  | 1092.3 | 1286.5 | 1480.7 | 1674.9 | 1869.2 | 2063.4 |
| ▶ 2300 | 2000     | 16, 20               | 400, 500                     |       |        | 400            | 120    | 42.3  | 132.2 | 239.7 | 462.3 | 697.2 | 932.2 | 1167.1 | 1402.1 | 1637.0 | 1872.0 | 2106.9 | 2341.9 | 2514.7 |

**Table 3251.28:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: Standard plug with flow divider St III, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS               | DN                      | NR     | CH               | Seat Ø<br>[mm] | Travel | Travel in % - Flow coefficient ( $C_v$ coefficient) |       |      |       |       |       |       |       |       |        |        |        |        |
|--------|----------|-------------------|-------------------------|--------|------------------|----------------|--------|---|-------|------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|
|        |          |                   |                         |        |                  |                |        | 0   | 5     | 10   | 20    | 30    | 40    | 50    | 60    | 70    | 80     | 90     | 100    | 110    |
| ▶ 3.5  | 3        | 2, 3              | 50, 80                  | St III | Equal percentage | 24             | 15     | 0.090   | 0.108 | 0.13 | 0.20  | 0.28  | 0.41  | 0.57  | 0.81  | 1.22  | 1.87   | 3.0    | 4.9    | 7.1    |
| ▶ 5.6  | 4.8      | 2, 3              | 50, 80                  |        |                  | 24             | 15     | 0.16  | 0.20  | 0.25 | 0.38  | 0.56  | 0.80  | 1.14  | 1.68  | 2.5   | 3.6    | 5.3    | 7.5    | 9.7    |
| ▶ 9    | 7.5      | 2, 3              | 50, 80                  |        |                  | 24             | 15     | 0.25  | 0.32  | 0.42 | 0.65  | 0.94  | 1.30  | 1.78  | 2.5   | 3.5   | 5.1    | 7.5    | 10.5   | 12.0   |
| ▶ 14   | 12       | 3                 | 80                      |        |                  | 31             | 15     | 0.39  | 0.52  | 0.65 | 1.01  | 1.47  | 2.11  | 3.0   | 4.4   | 6.9   | 11.1   | 15.2   | 18.5   | 20.9   |
| ▶ 23   | 20       | 3, 4              | 80, 100                 |        |                  | 38             | 15     | 0.46  | 0.61  | 0.76 | 1.12  | 1.67  | 2.6   | 4.5   | 7.9   | 12.6  | 17.1   | 21.4   | 25.2   | 28.0   |
| ▶ 35   | 30       | 3, 4              | 80, 100                 |        |                  | 50             | 30     | 0.73  | 0.98  | 1.32 | 2.07  | 3.0   | 4.2   | 6.4   | 9.7   | 14.3  | 21.1   | 30.3   | 40.0   | 47.7   |
| ▶ 55   | 47       | 4, 6              | 100, 150                |        |                  | 63             | 30     | 1.39  | 1.55  | 1.8  | 2.6   | 3.9   | 5.8   | 8.7   | 13.7  | 20.8  | 32.0   | 45.8   | 59.5   | 67.5   |
| ▶ 90   | 75       | 6, 8, 10          | 150, 200, 250           |        |                  | 80             | 30     | 1.6   | 1.9   | 2.5  | 4.0   | 6.6   | 10.7  | 17.0  | 26.5  | 41.8  | 60.5   | 75.5   | 84.6   | 90.2   |
| ▶ 140  | 120      | 6, 8, 10, 12      | 150, 200, 250, 300      |        |                  | 100            | 30     | 3.0   | 4.0   | 5.5  | 8.8   | 13.2  | 19.5  | 33.1  | 53.7  | 79.1  | 97.9   | 115.6  | 126.8  | 134.3  |
| ▶ 220  | 190      | 6, 8, 10, 12      | 150, 200, 250, 300      |        |                  | 125            | 60     | 4.7   | 6.5   | 8.3  | 13.6  | 21.1  | 31.1  | 44.3  | 62.4  | 95.9  | 147.2  | 183.0  | 199.7  | 206.6  |
| ▶ 315  | 270      | 8, 10, 12, 14, 16 | 200, 250, 300, 350, 400 |        |                  | 150            | 60     | 6.6   | 8.7   | 11.9 | 18.7  | 27.8  | 41.0  | 59.6  | 92.4  | 154.9 | 223.4  | 276.2  | 307.8  | 324.7  |
| ▶ 560  | 480      | 10, 12, 14, 16    | 250, 300, 350, 400      |        |                  | 200            | 60     | 10.9  | 17.3  | 20.0 | 32.8  | 64.8  | 118.6 | 200.8 | 295.4 | 378.2 | 449.1  | 506.1  | 543.0  | 564.1  |
| ▶ 880  | 750      | 12, 14, 16, 20    | 300, 350, 400, 500      |        |                  | 250            | 120    | 17.9  | 25.1  | 35.3 | 59.3  | 91.8  | 136.8 | 205.6 | 292.0 | 434.6 | 601.6  | 756.1  | 869.3  | 916.7  |
| ▶ 1280 | 1100     | 14, 16, 20        | 350, 400, 500           |        |                  | 300            | 120    | 23.2  | 35.9  | 50.5 | 84.8  | 131.2 | 195.6 | 294.0 | 418.9 | 625.4 | 875.4  | 1112.6 | 1296.4 | 1373.4 |
| ▶ 1730 | 1500     | 14, 16, 20        | 350, 400, 500           |        |                  | 350            | 120    | 32.2  | 45.2  | 63.5 | 106.8 | 165.2 | 246.3 | 370.0 | 527.8 | 788.8 | 1108.3 | 1413.6 | 1654.2 | 1748.8 |
| ▶ -    | 1900     | 20                | 500                     |        |                  | 400            | 120    | 40.6  | 56.9  | 80.1 | 134.6 | 208.3 | 310.5 | 466.6 | 666.2 | 996.7 | 1405.4 | 1798.9 | 2113.9 | 2229.5 |

**Table 3251.29:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: Standard plug with flow divider St III, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS               | DN                      | NR     | CH     | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |       |       |       |       |        |        |        |        |        |        |        |
|--------|----------|-------------------|-------------------------|--------|--------|----------------|--------|---|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|
|        |          |                   |                         |        |        |                |        | 0   | 5     | 10    | 20    | 30    | 40    | 50     | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 3.5  | 3        | 2, 3              | 50, 80                  | St III | Linear | 24             | 15     | 0.046   | 0.14  | 0.38  | 0.89  | 1.39  | 1.90  | 2.4    | 2.9    | 3.4    | 3.9    | 4.4    | 4.9    | 5.4    |
| ▶ 5.6  | 4.8      | 2, 3              | 50, 80                  |        |        | 24             | 15     | 0.112   | 0.36  | 0.76  | 1.52  | 2.3   | 3.1   | 3.9    | 4.6    | 5.4    | 6.2    | 7.0    | 7.7    | 8.5    |
| ▶ 9    | 7.5      | 2, 3              | 50, 80                  |        |        | 24             | 15     | 0.18  | 0.71  | 1.30  | 2.5   | 3.7   | 4.9   | 6.2    | 7.4    | 8.6    | 9.9    | 11.1   | 12.3   | 13.6   |
| ▶ 14   | 12       | 3                 | 80                      |        |        | 31             | 15     | 0.22  | 1.10  | 2.07  | 4.0   | 5.9   | 7.9   | 9.8    | 11.8   | 13.8   | 15.7   | 17.7   | 19.6   | 21.6   |
| ▶ 23   | 20       | 3, 4              | 80, 100                 |        |        | 38             | 15     | 0.37  | 0.94  | 1.77  | 4.1   | 6.7   | 9.3   | 11.9   | 14.5   | 17.1   | 19.7   | 22.3   | 24.9   | 27.5   |
| ▶ 35   | 30       | 3, 4              | 80, 100                 |        |        | 50             | 30     | 0.63  | 1.72  | 3.7   | 8.2   | 12.8  | 17.3  | 21.9   | 26.4   | 31.0   | 35.5   | 40.1   | 44.6   | 49.2   |
| ▶ 55   | 47       | 4, 6              | 100, 150                |        |        | 63             | 30     | 1.18  | 2.03  | 4.7   | 11.0  | 18.1  | 25.1  | 32.1   | 39.1   | 46.1   | 53.2   | 60.2   | 67.2   | 74.2   |
| ▶ 90   | 75       | 6, 8, 10          | 150, 200, 250           |        |        | 80             | 30     | 0.85  | 2.6   | 6.1   | 14.8  | 24.2  | 33.5  | 42.9   | 52.2   | 61.6   | 70.9   | 80.3   | 89.6   | 99.0   |
| ▶ 140  | 120      | 6, 8, 10, 12      | 150, 200, 250, 300      |        |        | 100            | 30     | 2.21  | 4.7   | 10.3  | 21.9  | 35.5  | 49.1  | 62.7   | 76.3   | 89.9   | 103.5  | 117.1  | 130.7  | 143.0  |
| ▶ 220  | 190      | 6, 8, 10, 12      | 150, 200, 250, 300      |        |        | 125            | 60     | 4.1   | 7.3   | 16.3  | 35.9  | 58.1  | 80.2  | 102.3  | 124.5  | 146.6  | 168.7  | 190.9  | 213.0  | 235.1  |
| ▶ 315  | 270      | 8, 10, 12, 14, 16 | 200, 250, 300, 350, 400 |        |        | 150            | 60     | 5.0   | 14.2  | 27.9  | 58.0  | 90.1  | 120.5 | 150.8  | 181.2  | 211.6  | 241.9  | 272.3  | 302.7  | 322.8  |
| ▶ 560  | 480      | 10, 12, 14, 16    | 250, 300, 350, 400      |        |        | 200            | 60     | 11.7  | 33.5  | 57.6  | 106.1 | 160.1 | 214.0 | 268.0  | 321.9  | 375.9  | 429.8  | 483.8  | 537.7  | 573.5  |
| ▶ 880  | 750      | 12, 14, 16, 20    | 300, 350, 400, 500      |        |        | 250            | 120    | 17.4  | 32.0  | 69.5  | 147.9 | 239.0 | 330.1 | 421.2  | 512.3  | 603.4  | 694.5  | 785.6  | 876.7  | 967.8  |
| ▶ 1280 | 1100     | 14, 16, 20        | 350, 400, 500           |        |        | 300            | 120    | 26.4  | 83.4  | 139.2 | 253.4 | 382.2 | 511.0 | 639.8  | 768.6  | 897.3  | 1026.1 | 1154.9 | 1283.7 | 1378.3 |
| ▶ 1730 | 1500     | 14, 16, 20        | 350, 400, 500           |        |        | 350            | 120    | 34.9  | 69.0  | 131.0 | 277.8 | 448.9 | 620.0 | 791.1  | 962.2  | 1133.3 | 1304.4 | 1475.5 | 1646.6 | 1817.7 |
| ▶ -    | 1900     | 20                | 500                     |        |        | 400            | 120    | 42.3  | 132.2 | 227.0 | 418.2 | 630.8 | 843.4 | 1056.0 | 1268.5 | 1481.1 | 1693.7 | 1906.3 | 2118.8 | 2275.2 |



**Table 3251.30:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: AC-1 Trim with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$ | $K_{vs}$ | NPS     | DN          | NR   | CH               | Seat Ø [mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |      |      |      |      |      |       |       |       |       |       |       |       |
|-------|----------|---------|-------------|------|------------------|-------------|--------|---|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|
|       |          |         |             |      |                  |             |        | 0   | 5    | 10   | 20   | 30   | 40   | 50    | 60    | 70    | 80    | 90    | 100   | 110   |
| ▶ 26  | 22       | 2, 3, 4 | 50, 80, 100 | AC-1 | Equal percentage | 38          | 15     | 0.40  | 0.49 | 0.64 | 1.1  | 1.7  | 2.7  | 4.0   | 5.8   | 9.0   | 14.5  | 19.8  | 24.7  | 28.4  |
| ▶ 40  | 35       | 2, 3    | 50, 80      |      |                  | 50          | 30     | 0.66  | 0.75 | 0.95 | 1.7  | 2.8  | 4.3  | 6.6   | 9.7   | 15.0  | 26.5  | 35.7  | 41.6  | 46.0  |
| ▶ 45  | 38       | 4       | 100         |      |                  | 50          | 30     | 0.80  | 0.98 | 1.2  | 2.0  | 3.1  | 4.6  | 6.8   | 10.1  | 15.2  | 22.6  | 33.3  | 45.8  | 58.1  |
| ▶ 60  | 50       | 3       | 80          |      |                  | 63          | 30     | 1.07  | 1.3  | 1.7  | 2.6  | 4.1  | 6.1  | 9.0   | 13.3  | 19.9  | 29.8  | 43.9  | 59.1  | 73.6  |
| ▶ 65  | 55       | 4       | 100         |      |                  | 63          | 30     | 1.2   | 1.4  | 1.8  | 2.9  | 4.5  | 6.7  | 9.9   | 14.6  | 21.9  | 32.7  | 48.2  | 66.4  | 84.0  |
| ▶ 70  | 60       | 3       | 80          |      |                  | 80          | 30     | 1.3   | 1.6  | 2.0  | 3.2  | 4.9  | 7.3  | 10.9  | 16.2  | 23.9  | 37.2  | 59.4  | 75.5  | 87.1  |
| ▶ 80  | 70       | 3       | 80          |      |                  | 80          | 30     | 1.7   | 2.3  | 3.0  | 4.8  | 7.4  | 10.8 | 15.9  | 22.8  | 32.7  | 46.6  | 65.3  | 84.3  | 100.2 |
| ▶ 90  | 75       | 4       | 100         |      |                  | 80          | 30     | 1.6   | 1.9  | 2.5  | 3.9  | 6.2  | 9.2  | 13.5  | 19.9  | 29.9  | 44.6  | 65.8  | 88.7  | 110.4 |
| ▶ 90  | 75       | 4       | 100         |      |                  | 100         | 30     | 1.7   | 2.1  | 2.6  | 4.1  | 6.4  | 9.4  | 14.1  | 21.0  | 30.9  | 48.1  | 76.8  | 97.7  | 112.6 |
| ▶ 110 | 95       | 6       | 150         |      |                  | 80          | 30     | 2.0   | 2.5  | 3.1  | 5.0  | 7.8  | 11.6 | 17.1  | 25.2  | 37.9  | 56.5  | 83.3  | 114.6 | 145.1 |
| ▶ 120 | 100      | 4       | 100         |      |                  | 100         | 30     | 2.5   | 3.4  | 4.6  | 7.8  | 12.2 | 18.3 | 26.5  | 37.9  | 55.2  | 75.6  | 97.1  | 113.3 | 122.0 |
| ▶ 170 | 145      | 6       | 150         |      |                  | 100         | 30     | 3.1   | 3.7  | 4.7  | 7.6  | 11.9 | 17.7 | 26.0  | 38.5  | 57.9  | 86.3  | 127.2 | 171.5 | 213.4 |
| ▶ 180 | 155      | 8       | 200         |      |                  | 100         | 30     | 3.3   | 4.0  | 5.1  | 8.2  | 12.7 | 19.0 | 27.8  | 41.2  | 61.8  | 92.3  | 135.9 | 187.0 | 236.8 |
| ▶ 240 | 205      | 6       | 150         |      |                  | 125         | 60     | 4.1   | 5.0  | 6.4  | 10.3 | 16.0 | 23.8 | 35.0  | 51.8  | 77.8  | 116.1 | 171.0 | 230.6 | 287.0 |
| ▶ 240 | 205      | 6       | 150         |      |                  | 150         | 60     | 4.6   | 5.6  | 6.9  | 11.0 | 17.0 | 25.1 | 37.6  | 56.0  | 82.3  | 128.4 | 204.8 | 260.5 | 300.4 |
| ▶ 270 | 230      | 8       | 200         |      |                  | 125         | 60     | 4.9   | 5.9  | 7.5  | 12.1 | 18.9 | 28.1 | 41.3  | 61.1  | 91.8  | 136.9 | 201.7 | 277.5 | 351.4 |
| ▶ 290 | 250      | 6       | 150         |      |                  | 150         | 60     | 6.0   | 7.8  | 10.4 | 17.6 | 27.5 | 41.7 | 61.9  | 90.4  | 128.9 | 187.9 | 248.0 | 286.0 | 307.9 |
| ▶ 360 | 305      | 8       | 200         |      |                  | 150         | 60     | 6.4   | 7.9  | 10.0 | 16.1 | 25.0 | 37.3 | 54.8  | 81.0  | 121.7 | 181.5 | 264.4 | 367.9 | 465.6 |
| ▶ 420 | 360      | 8       | 200         |      |                  | 200         | 60     | 6.9   | 8.4  | 10.4 | 16.5 | 25.4 | 37.7 | 56.4  | 83.9  | 123.5 | 192.6 | 307.1 | 413.9 | 478.3 |
| ▶ 560 | 480      | 8       | 200         |      |                  | 200         | 60     | 11.8  | 14.2 | 18.5 | 29.5 | 46.1 | 69.6 | 103.2 | 157.9 | 253.7 | 364.5 | 457.2 | 523.9 | 573.7 |

**Table 3251.31:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: AC-2 Trim with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$ | $K_{vs}$ | NPS | DN  | NR   | CH               | Seat Ø [mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |     |     |     |     |      |      |      |      |      |      |      |      |
|-------|----------|-----|-----|------|------------------|-------------|--------|---|-----|-----|-----|-----|------|------|------|------|------|------|------|------|
|       |          |     |     |      |                  |             |        | 0   | 5   | 10  | 20  | 30  | 40   | 50   | 60   | 70   | 80   | 90   | 100  | 110  |
| ▶ 20  | 16       | 3   | 80  | AC-2 | Equal percentage | 80          | 30     | 1.9   | 2.0 | 2.3 | 3.1 | 4.4 | 6.5  | 8.9  | 11.8 | 15.0 | 17.8 | 19.3 | 20.1 | 20.6 |
| ▶ 26  | 22       | 3   | 80  |      |                  | 80          | 30     | 2.4   | 2.6 | 3.0 | 4.0 | 5.7 | 8.4  | 11.5 | 15.3 | 19.5 | 23.0 | 25.1 | 26.1 | 26.7 |
| ▶ 30  | 25       | 3   | 80  |      |                  | 80          | 30     | 1.9   | 2.2 | 2.7 | 4.3 | 6.6 | 9.8  | 13.4 | 17.9 | 22.7 | 26.9 | 29.3 | 30.5 | 31.2 |
| ▶ 35  | 30       | 3   | 80  |      |                  | 80          | 30     | 1.9   | 2.2 | 2.9 | 4.8 | 7.6 | 11.0 | 15.6 | 20.7 | 25.8 | 29.6 | 32.6 | 34.3 | 35.3 |
| ▶ 40  | 35       | 3   | 80  |      |                  | 80          | 30     | 2.2   | 2.4 | 3.0 | 5.1 | 7.9 | 11.5 | 16.4 | 22.2 | 28.1 | 33.1 | 36.8 | 39.4 | 40.8 |
| ▶ 40  | 35       | 4   | 100 |      |                  | 100         | 30     | 2.0   | 2.6 | 3.3 | 5.8 | 9.4 | 13.7 | 18.8 | 25.0 | 31.8 | 37.7 | 41.0 | 42.7 | 43.6 |

| C <sub>v</sub> | K <sub>vs</sub> | NPS | DN  | NR   | CH               | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient (C <sub>v</sub> coefficient) |      |      |      |       |       |       |       |       |       |       |       |       |
|----------------|-----------------|-----|-----|------|------------------|----------------|--------|---|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                |                 |     |     |      |                  |                |        | 0   | 5    | 10   | 20   | 30    | 40    | 50    | 60    | 70    | 80    | 90    | 100   | 110   |
| ▶ 45           | 38              | 3   | 80  | AC-2 | Equal percentage | 80             | 30     | 1.9   | 2.3  | 2.9  | 4.8  | 7.6   | 11.2  | 16.2  | 22.4  | 29.4  | 36.2  | 41.1  | 44.0  | 45.3  |
| ▶ 45           | 38              | 4   | 100 |      |                  | 100            | 30     | 3.0   | 3.5  | 4.3  | 6.7  | 10.3  | 14.9  | 20.4  | 27.2  | 34.5  | 40.9  | 44.5  | 46.4  | 47.4  |
| ▶ 50           | 43              | 3   | 80  |      |                  | 80             | 30     | 2.2   | 2.6  | 3.3  | 5.4  | 8.6   | 12.6  | 18.4  | 25.4  | 33.3  | 41.0  | 46.5  | 49.7  | 51.3  |
| ▶ 50           | 43              | 4   | 100 |      |                  | 100            | 30     | 4.6   | 5.1  | 6.0  | 8.2  | 11.6  | 16.8  | 23.1  | 30.8  | 39.1  | 46.3  | 50.4  | 52.5  | 53.6  |
| ▶ 55           | 45              | 4   | 100 |      |                  | 100            | 30     | 3.7   | 4.2  | 5.0  | 8.0  | 12.1  | 17.6  | 24.2  | 32.2  | 40.9  | 48.5  | 52.7  | 54.9  | 56.1  |
| ▶ 60           | 50              | 3   | 80  |      |                  | 80             | 30     | 1.8   | 2.2  | 2.8  | 4.9  | 8.1   | 11.9  | 17.3  | 24.5  | 33.1  | 43.1  | 51.6  | 57.0  | 60.1  |
| ▶ 60           | 50              | 4   | 100 |      |                  | 100            | 30     | 3.5   | 4.0  | 4.8  | 7.6  | 11.7  | 17.1  | 24.4  | 33.3  | 43.3  | 52.2  | 58.1  | 61.2  | 63.1  |
| ▶ 65           | 55              | 4   | 100 |      |                  | 100            | 30     | 4.0   | 4.4  | 5.1  | 7.0  | 10.6  | 15.8  | 22.7  | 31.2  | 42.1  | 52.3  | 59.5  | 64.1  | 67.0  |
| ▶ 70           | 60              | 4   | 100 |      |                  | 100            | 30     | 3.6   | 4.1  | 4.9  | 7.3  | 11.5  | 17.2  | 24.8  | 34.0  | 46.0  | 57.0  | 64.9  | 70.0  | 73.1  |
| ▶ 75           | 63              | 4   | 100 |      |                  | 100            | 30     | 2.4   | 3.3  | 4.3  | 7.5  | 12.1  | 18.1  | 26.0  | 35.7  | 48.3  | 59.9  | 68.2  | 73.5  | 76.8  |
| ▶ 85           | 72              | 4   | 100 |      |                  | 100            | 30     | 3.7   | 4.2  | 5.1  | 7.9  | 12.0  | 17.8  | 25.4  | 35.3  | 49.1  | 64.0  | 76.2  | 83.8  | 87.1  |
| ▶ 100          | 85              | 6   | 150 |      |                  | 150            | 60     | 5.3   | 6.2  | 7.6  | 12.4 | 19.4  | 28.6  | 40.4  | 54.8  | 71.0  | 85.8  | 94.8  | 99.3  | 101.6 |
| ▶ 110          | 95              | 6   | 150 |      |                  | 150            | 60     | 6.6   | 7.6  | 9.4  | 15.4 | 24.0  | 35.3  | 50.0  | 67.8  | 87.8  | 106.1 | 117.2 | 122.8 | 125.5 |
| ▶ 120          | 100             | 6   | 150 |      |                  | 150            | 60     | 5.2   | 6.4  | 8.1  | 13.8 | 21.3  | 32.1  | 45.5  | 62.6  | 83.1  | 101.8 | 112.2 | 117.7 | 120.5 |
| ▶ 130          | 110             | 6   | 150 |      |                  | 150            | 60     | 6.8   | 7.9  | 9.7  | 15.9 | 24.9  | 36.6  | 51.8  | 70.3  | 91.0  | 110.0 | 121.6 | 127.3 | 130.2 |
| ▶ 140          | 120             | 6   | 150 |      |                  | 150            | 60     | 7.4   | 8.6  | 10.6 | 17.4 | 27.1  | 39.9  | 56.5  | 76.6  | 99.2  | 119.9 | 132.5 | 138.8 | 141.9 |
| ▶ 150          | 130             | 6   | 150 |      |                  | 150            | 60     | 8.7   | 10.1 | 12.4 | 20.4 | 31.8  | 46.8  | 66.3  | 89.9  | 116.4 | 140.7 | 155.5 | 162.9 | 166.5 |
| ▶ 160          | 135             | 6   | 150 |      |                  | 150            | 60     | 7.1   | 8.6  | 10.9 | 18.6 | 28.8  | 43.3  | 61.4  | 84.6  | 112.2 | 137.5 | 151.5 | 157.4 | 160.1 |
| ▶ 160          | 135             | 8   | 200 |      |                  | 200            | 60     | 9.4   | 10.8 | 13.3 | 21.5 | 32.7  | 47.5  | 67.0  | 92.2  | 121.9 | 140.1 | 150.6 | 156.2 | 160.5 |
| ▶ 170          | 145             | 6   | 150 |      |                  | 150            | 60     | 7.0   | 8.8  | 11.1 | 18.1 | 28.1  | 41.6  | 60.5  | 83.8  | 111.5 | 141.0 | 159.0 | 168.3 | 173.0 |
| ▶ 170          | 145             | 8   | 200 |      |                  | 200            | 60     | 15.2  | 17.3 | 20.6 | 28.8 | 39.1  | 53.0  | 72.0  | 99.0  | 130.9 | 150.5 | 161.2 | 168.0 | 172.1 |
| ▶ 180          | 155             | 6   | 150 |      |                  | 150            | 60     | 7.5   | 9.4  | 11.8 | 19.3 | 30.1  | 44.5  | 64.7  | 89.6  | 119.2 | 150.7 | 170.0 | 177.7 | 180.8 |
| ▶ 180          | 155             | 8   | 200 |      |                  | 200            | 60     | 16.2  | 18.5 | 21.9 | 31.1 | 41.8  | 56.6  | 77.0  | 105.8 | 139.9 | 160.8 | 172.3 | 179.6 | 183.9 |
| ▶ 190          | 160             | 6   | 150 |      |                  | 150            | 60     | 7.7   | 9.7  | 12.2 | 19.9 | 31.1  | 45.9  | 66.8  | 92.5  | 123.1 | 155.6 | 175.5 | 185.8 | 190.9 |
| ▶ 190          | 160             | 8   | 200 |      |                  | 200            | 60     | 16.7  | 19.1 | 22.6 | 32.1 | 43.1  | 58.5  | 79.4  | 109.2 | 144.4 | 166.0 | 177.9 | 185.4 | 191.1 |
| ▶ 200          | 170             | 8   | 200 |      |                  | 200            | 60     | 17.8  | 20.3 | 24.0 | 34.1 | 45.8  | 62.1  | 84.4  | 116.1 | 153.5 | 176.4 | 188.3 | 195.2 | 200.9 |
| ▶ 210          | 180             | 6   | 150 |      |                  | 150            | 60     | 7.2   | 8.5  | 10.5 | 17.1 | 27.1  | 41.0  | 59.8  | 85.9  | 118.7 | 163.1 | 196.8 | 212.0 | 216.7 |
| ▶ 210          | 180             | 8   | 200 |      |                  | 200            | 60     | 12.5  | 14.4 | 17.8 | 28.7 | 43.6  | 63.3  | 89.4  | 122.9 | 162.5 | 186.8 | 199.3 | 206.1 | 211.8 |
| ▶ 220          | 190             | 8   | 200 |      |                  | 200            | 60     | 13.2  | 15.2 | 18.8 | 30.3 | 46.1  | 66.9  | 94.3  | 129.7 | 171.5 | 197.1 | 209.2 | 215.9 | 221.1 |
| ▶ 240          | 205             | 8   | 200 |      |                  | 200            | 60     | 12.0  | 14.2 | 17.7 | 27.9 | 42.6  | 62.1  | 88.8  | 125.3 | 174.6 | 209.3 | 226.3 | 235.0 | 240.6 |
| ▶ 255          | 220             | 8   | 200 |      |                  | 200            | 60     | 12.9  | 15.3 | 18.8 | 30.1 | 45.7  | 66.7  | 95.3  | 134.5 | 187.4 | 224.6 | 242.8 | 251.6 | 256.2 |
| ▶ 290          | 250             | 8   | 200 |      |                  | 200            | 60     | 11.9  | 14.2 | 17.8 | 28.8 | 44.1  | 65.4  | 94.3  | 136.6 | 201.4 | 250.6 | 277.9 | 290.7 | 297.6 |
| ▶ 305          | 260             | 8   | 200 |      |                  | 200            | 60     | 12.4  | 14.7 | 18.7 | 29.9 | 45.9  | 68.0  | 98.1  | 142.0 | 209.4 | 260.6 | 289.0 | 302.3 | 309.5 |
| ▶ 325          | 280             | 8   | 200 | 200  | 60               | 8.2            | 9.2    | 11.3  | 18.3 | 28.3 | 41.4 | 61.5  | 89.7  | 129.2 | 189.9 | 269.7 | 324.3 | 354.2 |       |       |
| ▶ 375          | 320             | 8   | 200 | 200  | 60               | 11.8           | 13.7   | 17.3  | 29.5 | 45.3 | 68.2 | 100.8 | 148.6 | 227.3 | 292.1 | 338.9 | 367.7 | 380.6 |       |       |

**Table 3251.32:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: AC-3 Trim with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS        | DN               | NR   | CH               | Seat Ø [mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |        |        |        |       |       |       |       |      |      |      |      |       |
|--------|----------|------------|------------------|------|------------------|-------------|--------|---|--------|--------|--------|-------|-------|-------|-------|------|------|------|------|-------|
|        |          |            |                  |      |                  |             |        | 0   | 5      | 10     | 20     | 30    | 40    | 50    | 60    | 70   | 80   | 90   | 100  | 110   |
| ▶ 0.5  | 0.4      | 1          | 25               | AC-3 | Equal percentage | 12          | 7,5    | 0.0024  | 0.0026 | 0.0032 | 0.0059 | 0.014 | 0.027 | 0.050 | 0.085 | 0.14 | 0.22 | 0.32 | 0.51 | 0.97  |
| ▶ 0.75 | 0.63     | 1, 1½      | 25, 40           |      |                  | 16          | 7,5    | 0.012   | 0.015  | 0.019  | 0.029  | 0.046 | 0.076 | 0.12  | 0.18  | 0.27 | 0.38 | 0.55 | 0.80 | 1.3   |
| ▶ 1.2  | 1        | 1, 1½      | 25, 40           |      |                  | 18          | 7,5    | 0.025   | 0.029  | 0.035  | 0.049  | 0.071 | 0.113 | 0.17  | 0.26  | 0.36 | 0.50 | 0.70 | 1.13 | 2.1   |
| ▶ 1.2  | 1        | 2          | 50               |      |                  | 18          | 15     | 0.025   | 0.028  | 0.032  | 0.046  | 0.07  | 0.11  | 0.18  | 0.27  | 0.41 | 0.59 | 0.85 | 1.3  | 2.0   |
| ▶ 2    | 1.6      | 1, 1½      | 25, 40           |      |                  | 22          | 7,5    | 0.040   | 0.047  | 0.056  | 0.078  | 0.113 | 0.18  | 0.28  | 0.42  | 0.58 | 0.80 | 1.13 | 1.8  | 3.3   |
| ▶ 2    | 1.6      | 2          | 50               |      |                  | 22          | 15     | 0.040   | 0.044  | 0.051  | 0.073  | 0.115 | 0.18  | 0.28  | 0.44  | 0.65 | 0.94 | 1.4  | 2.0  | 3.2   |
| ▶ 3    | 2.5      | 1          | 25               |      |                  | 22          | 7,5    | 0.025   | 0.031  | 0.045  | 0.092  | 0.17  | 0.28  | 0.43  | 0.64  | 0.94 | 1.5  | 2.4  | 3.2  | 3.7   |
| ▶ 3    | 2.5      | 1½         | 40               |      |                  | 24          | 7,5    | 0.027   | 0.033  | 0.045  | 0.092  | 0.17  | 0.28  | 0.43  | 0.65  | 0.99 | 1.6  | 2.4  | 3.2  | 3.9   |
| ▶ 3    | 2.5      | 2, 3       | 50, 80           |      |                  | 24          | 15     | 0.050   | 0.055  | 0.065  | 0.107  | 0.18  | 0.29  | 0.45  | 0.69  | 1.03 | 1.5  | 2.1  | 3.2  | 5.0   |
| ▶ 4    | 3.5      | 1          | 25               |      |                  | 22          | 7,5    | 0.057   | 0.077  | 0.103  | 0.18   | 0.29  | 0.43  | 0.67  | 0.99  | 1.5  | 2.2  | 3.2  | 3.9  | 4.3   |
| ▶ 5    | 4        | 1½         | 40               |      |                  | 31          | 7,5    | 0.076   | 0.089  | 0.107  | 0.16   | 0.25  | 0.39  | 0.58  | 0.87  | 1.3  | 1.9  | 3.0  | 4.5  | 6.1   |
| ▶ 5    | 4        | 2, 3, 4    | 50, 80, 100      |      |                  | 31          | 15     | 0.058   | 0.078  | 0.104  | 0.17   | 0.29  | 0.46  | 0.72  | 1.10  | 1.7  | 2.4  | 3.4  | 5.1  | 8.0   |
| ▶ 7.5  | 6.3      | 1½         | 40               |      |                  | 31          | 7,5    | 0.101   | 0.114  | 0.14   | 0.23   | 0.37  | 0.57  | 0.86  | 1.3   | 2.1  | 3.3  | 5.2  | 6.8  | 8.0   |
| ▶ 7.5  | 6.3      | 2, 3, 4, 6 | 50, 80, 100, 150 |      |                  | 31          | 15     | 0.16  | 0.24   | 0.33   | 0.55   | 0.81  | 1.14  | 1.63  | 2.3   | 3.1  | 4.1  | 5.7  | 7.8  | 10.0  |
| ▶ 12   | 10       | 2, 3, 4, 6 | 50, 80, 100, 150 |      |                  | 38          | 15     | 0.19  | 0.21   | 0.25   | 0.41   | 0.69  | 1.09  | 1.7   | 2.6   | 3.9  | 5.7  | 8.1  | 12.1 | 19.1  |
| ▶ 14   | 12       | 3, 4, 6    | 80, 100, 150     |      |                  | 38          | 15     | 0.23  | 0.25   | 0.30   | 0.49   | 0.83  | 1.3   | 2.0   | 3.1   | 4.7  | 6.8  | 9.8  | 14.5 | 22.9  |
| ▶ 20   | 16       | 3, 4       | 80, 100          |      |                  | 50          | 15     | 0.25  | 0.32   | 0.42   | 0.70   | 1.11  | 1.7   | 2.6   | 3.8   | 5.6  | 8.3  | 12.2 | 18.0 | 21.1  |
| ▶ 20   | 16       | 6, 8       | 150, 200         |      |                  | 50          | 30     | 0.40  | 0.44   | 0.51   | 0.73   | 1.15  | 1.8   | 2.8   | 4.4   | 6.5  | 9.4  | 13.5 | 20.1 | 31.7  |
| ▶ 30   | 25       | 3, 4       | 80, 100          |      |                  | 63          | 15     | 0.44  | 0.58   | 0.74   | 1.15   | 1.8   | 2.7   | 4.1   | 6.6   | 10.6 | 16.0 | 22.2 | 28.1 | 31.8  |
| ▶ 30   | 25       | 6, 8       | 150, 200         |      |                  | 63          | 30     | 0.62  | 0.69   | 0.80   | 1.14   | 1.8   | 2.8   | 4.4   | 6.8   | 10.2 | 14.7 | 21.1 | 31.3 | 49.6  |
| ▶ 47   | 40       | 4          | 100              |      |                  | 80          | 15     | 0.76  | 0.84   | 0.99   | 1.6    | 2.8   | 4.4   | 6.8   | 10.5  | 15.7 | 22.6 | 32.5 | 48.2 | 71.7  |
| ▶ 47   | 40       | 6, 8       | 150, 200         |      |                  | 80          | 30     | 0.99  | 1.11   | 1.3    | 1.8    | 2.9   | 4.5   | 7.1   | 10.9  | 16.3 | 23.6 | 33.8 | 50.1 | 79.3  |
| ▶ 75   | 63       | 6, 8       | 150, 200         |      |                  | 100         | 30     | 1.2   | 1.3    | 1.6    | 2.6    | 4.3   | 6.9   | 10.7  | 16.5  | 24.7 | 35.7 | 51.2 | 75.9 | 112.9 |
| ▶ 95   | 80       | 8          | 200              |      |                  | 100         | 30     | 1.5   | 1.7    | 2.0    | 3.2    | 5.5   | 8.7   | 13.6  | 21.0  | 31.4 | 45.3 | 65.0 | 96.4 | 143.3 |

**Table 3251.33:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: AC-3 Trim with linear characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS        | DN               | NR   | CH     | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |       |       |      |      |      |      |      |      |      |      |       |
|--------|----------|------------|------------------|------|--------|----------------|--------|---|-------|-------|-------|------|------|------|------|------|------|------|------|-------|
|        |          |            |                  |      |        |                |        | 0   | 5     | 10    | 20    | 30   | 40   | 50   | 60   | 70   | 80   | 90   | 100  | 110   |
| ▶ 0.5  | 0.4      | 1          | 25               | AC-3 | Linear | 12             | 7.5    | 0.0071  | 0.023 | 0.048 | 0.099 | 0.15 | 0.20 | 0.25 | 0.30 | 0.35 | 0.40 | 0.45 | 0.50 | 0.55  |
| ▶ 0.75 | 0.63     | 1, 1½      | 25, 40           |      |        | 16             | 7.5    | 0.0112  | 0.036 | 0.076 | 0.16  | 0.23 | 0.31 | 0.39 | 0.47 | 0.55 | 0.63 | 0.71 | 0.79 | 0.86  |
| ▶ 1.2  | 1        | 1, 1½      | 25, 40           |      |        | 18             | 7.5    | 0.016   | 0.051 | 0.109 | 0.22  | 0.34 | 0.45 | 0.56 | 0.67 | 0.79 | 0.90 | 1.01 | 1.13 | 1.2   |
| ▶ 1.2  | 1        | 2          | 50               |      |        | 18             | 15     | 0.018   | 0.057 | 0.12  | 0.25  | 0.37 | 0.50 | 0.62 | 0.75 | 0.87 | 1.00 | 1.12 | 1.2  | 1.4   |
| ▶ 2    | 1.6      | 1, 1½      | 25, 40           |      |        | 22             | 7.5    | 0.027   | 0.085 | 0.18  | 0.37  | 0.56 | 0.74 | 0.93 | 1.11 | 1.3  | 1.5  | 1.7  | 1.9  | 2.0   |
| ▶ 2    | 1.6      | 2          | 50               |      |        | 22             | 15     | 0.028   | 0.091 | 0.19  | 0.40  | 0.60 | 0.80 | 1.00 | 1.2  | 1.4  | 1.6  | 1.8  | 2.0  | 2.2   |
| ▶ 3    | 2.5      | 1          | 25               |      |        | 22             | 7.5    | 0.042   | 0.13  | 0.28  | 0.59  | 0.88 | 1.2  | 1.5  | 1.8  | 2.1  | 2.4  | 2.7  | 3.0  | 3.2   |
| ▶ 3    | 2.5      | 1½         | 40               |      |        | 24             | 7.5    | 0.043   | 0.14  | 0.29  | 0.60  | 0.90 | 1.2  | 1.5  | 1.8  | 2.1  | 2.4  | 2.7  | 3.0  | 3.3   |
| ▶ 3    | 2.5      | 2, 3       | 50, 80           |      |        | 24             | 15     | 0.044   | 0.14  | 0.30  | 0.62  | 0.93 | 1.2  | 1.6  | 1.9  | 2.2  | 2.5  | 2.8  | 3.1  | 3.4   |
| ▶ 4    | 3.5      | 1          | 25               |      |        | 22             | 7.5    | 0.055   | 0.18  | 0.37  | 0.77  | 1.2  | 1.5  | 1.9  | 2.3  | 2.7  | 3.1  | 3.5  | 3.9  | 4.3   |
| ▶ 5    | 4        | 1½         | 40               |      |        | 31             | 7.5    | 0.065   | 0.21  | 0.44  | 0.91  | 1.4  | 1.8  | 2.3  | 2.8  | 3.2  | 3.7  | 4.1  | 4.6  | 5.1   |
| ▶ 5    | 4        | 2, 3, 4    | 50, 80, 100      |      |        | 31             | 15     | 0.071   | 0.23  | 0.48  | 0.99  | 1.5  | 2.0  | 2.5  | 3.0  | 3.5  | 4.0  | 4.5  | 5.0  | 5.5   |
| ▶ 7.5  | 6.3      | 1½         | 40               |      |        | 31             | 7.5    | 0.098   | 0.31  | 0.66  | 1.4   | 2.1  | 2.7  | 3.4  | 4.1  | 4.8  | 5.5  | 6.2  | 6.9  | 7.6   |
| ▶ 7.5  | 6.3      | 2, 3, 4, 6 | 50, 80, 100, 150 |      |        | 31             | 15     | 0.112   | 0.36  | 0.76  | 1.6   | 2.3  | 3.1  | 3.9  | 4.7  | 5.5  | 6.3  | 7.1  | 7.9  | 8.6   |
| ▶ 12   | 10       | 2, 3, 4, 6 | 50, 80, 100, 150 |      |        | 38             | 15     | 0.17  | 0.55  | 1.2   | 2.4   | 3.6  | 4.8  | 6.0  | 7.2  | 8.5  | 9.7  | 10.9 | 12.1 | 13.3  |
| ▶ 14   | 12       | 3, 4, 6    | 80, 100, 150     |      |        | 38             | 15     | 0.21  | 0.66  | 1.4   | 2.9   | 4.3  | 5.8  | 7.2  | 8.7  | 10.1 | 11.6 | 13.0 | 14.5 | 16.0  |
| ▶ 20   | 16       | 3, 4       | 80, 100          |      |        | 50             | 15     | 0.26  | 0.83  | 1.7   | 3.6   | 5.4  | 7.2  | 9.0  | 10.9 | 12.7 | 14.5 | 16.3 | 18.1 | 19.9  |
| ▶ 20   | 16       | 6, 8       | 150, 200         |      |        | 50             | 30     | 0.28  | 0.91  | 1.9   | 4.0   | 6.0  | 8.0  | 10.0 | 12.0 | 14.0 | 16.0 | 18.0 | 20.0 | 22.0  |
| ▶ 30   | 25       | 3, 4       | 80, 100          |      |        | 63             | 15     | 0.40  | 1.3   | 2.7   | 5.5   | 8.3  | 11.1 | 13.9 | 16.7 | 19.4 | 22.2 | 25.0 | 27.8 | 30.6  |
| ▶ 30   | 25       | 6, 8       | 150, 200         |      |        | 63             | 30     | 0.44  | 1.4   | 3.0   | 6.2   | 9.3  | 12.4 | 15.6 | 18.7 | 21.8 | 24.9 | 28.1 | 31.2 | 34.3  |
| ▶ 47   | 40       | 4          | 100              |      |        | 80             | 15     | 0.69  | 2.2   | 4.7   | 9.6   | 14.4 | 19.3 | 24.1 | 29.0 | 33.8 | 38.6 | 43.5 | 48.3 | 53.2  |
| ▶ 47   | 40       | 6, 8       | 150, 200         |      |        | 80             | 30     | 0.71  | 2.3   | 4.8   | 9.9   | 14.9 | 19.9 | 24.9 | 29.9 | 34.9 | 39.9 | 44.9 | 49.9 | 54.9  |
| ▶ 75   | 63       | 6, 8       | 150, 200         |      |        | 100            | 30     | 1.09  | 3.5   | 7.3   | 15.1  | 22.7 | 30.4 | 38.0 | 45.6 | 53.2 | 60.9 | 68.5 | 76.1 | 83.7  |
| ▶ 95   | 80       | 8          | 200              |      |        | 100            | 30     | 1.4   | 4.4   | 9.3   | 19.2  | 28.9 | 38.6 | 48.2 | 57.9 | 67.6 | 77.3 | 87.0 | 96.7 | 106.3 |

**Table 3251.34:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: Perforated plug without flow divider, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS                  | DN                           | NR              | CH               | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |      |       |       |       |       |        |        |        |        |        |        |
|--------|----------|----------------------|------------------------------|-----------------|------------------|----------------|--------|---|-------|------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|
|        |          |                      |                              |                 |                  |                |        | 0   | 5     | 10   | 20    | 30    | 40    | 50    | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 5    | 4        | 1, 1½, 2, 3          | 25, 40, 50, 80               | Perforated plug | Equal percentage | 24             | 15     | 0.033   | 0.087 | 0.13 | 0.21  | 0.30  | 0.45  | 0.67  | 1.00   | 1.5    | 2.1    | 3.2    | 4.8    | 6.3    |
| ▶ 7.5  | 6.3      | 1, 1½, 2, 3          | 25, 40, 50, 80               |                 |                  | 24             | 15     | 0.073   | 0.16  | 0.22 | 0.33  | 0.51  | 0.71  | 1.06  | 1.7    | 2.6    | 3.7    | 5.2    | 6.8    | 7.5    |
| ▶ 12   | 10       | 1½, 2, 3             | 40, 50, 80                   |                 |                  | 31             | 15     | 0.20  | 0.22  | 0.25 | 0.38  | 0.66  | 1.04  | 1.7   | 2.8    | 4.7    | 7.6    | 10.3   | 12.6   | 14.7   |
| ▶ 20   | 16       | 1½, 2, 3, 4          | 40, 50, 80, 100              |                 |                  | 38             | 15     | 0.33  | 0.50  | 0.68 | 1.10  | 1.5   | 2.2   | 3.2   | 5.0    | 8.2    | 11.6   | 15.0   | 18.2   | 21.2   |
| ▶ 30   | 25       | 2, 3, 4              | 50, 80, 100                  |                 |                  | 50             | 15     | 0.54  | 0.92  | 1.2  | 1.7   | 2.6   | 3.9   | 6.9   | 11.1   | 15.9   | 20.6   | 25.3   | 29.7   | 33.8   |
| ▶ 42   | 36       | 2, 3, 4              | 50, 80, 100                  |                 |                  | 50             | 30     | 0.42  | 1.06  | 1.4  | 2.1   | 3.4   | 5.4   | 9.0   | 14.2   | 20.5   | 28.1   | 35.6   | 41.6   | 46.2   |
| ▶ 62   | 54       | 3, 4, 6              | 80, 100, 150                 |                 |                  | 63             | 30     | 0.62  | 0.94  | 1.2  | 1.8   | 3.3   | 5.6   | 9.5   | 17.1   | 27.5   | 40.1   | 53.5   | 63.1   | 68.7   |
| ▶ 75   | 63       | 3, 4, 6, 8, 10       | 80, 100, 150, 200, 250       |                 |                  | 80             | 30     | 0.73  | 1.2   | 1.7  | 3.0   | 4.7   | 7.0   | 10.3  | 16.2   | 29.4   | 46.8   | 62.0   | 74.1   | 83.8   |
| ▶ 95   | 80       | 3, 4, 6, 8, 10       | 80, 100, 150, 200, 250       |                 |                  | 80             | 30     | 0.92  | 1.2   | 1.5  | 2.5   | 4.7   | 11.2  | 22.7  | 42.7   | 59.9   | 74.9   | 88.2   | 99.4   | 107.1  |
| ▶ 120  | 100      | 4, 6, 8, 10, 12      | 100, 150, 200, 250, 300      |                 |                  | 100            | 30     | 1.2   | 1.5   | 2.0  | 3.7   | 6.6   | 11.1  | 18.3  | 30.2   | 47.2   | 68.7   | 94.7   | 115.7  | 128.2  |
| ▶ 190  | 160      | 6, 8, 10, 12         | 150, 200, 250, 300           |                 |                  | 125            | 60     | 1.8   | 2.3   | 3.1  | 6.6   | 11.6  | 17.8  | 26.2  | 39.1   | 57.9   | 93.6   | 143.4  | 187.7  | 223.2  |
| ▶ 290  | 250      | 6, 8, 10, 12, 14, 16 | 150, 200, 250, 300, 350, 399 |                 |                  | 150            | 60     | 2.9   | 4.2   | 5.7  | 10.5  | 17.7  | 27.9  | 42.8  | 77.3   | 128.7  | 191.2  | 249.1  | 289.8  | 321.9  |
| ▶ 420  | 360      | 8, 10, 12, 14, 16    | 200, 250, 300, 350, 400      |                 |                  | 200            | 60     | 4.2   | 5.3   | 6.9  | 12.8  | 20.4  | 35.8  | 63.4  | 108.7  | 174.6  | 252.0  | 337.6  | 414.5  | 456.2  |
| ▶ 485  | 420      | 8, 10, 12, 14, 16    | 200, 250, 300, 350, 400      |                 |                  | 200            | 60     | 4.9   | 6.5   | 9.7  | 22.8  | 61.6  | 115.6 | 172.3 | 234.7  | 301.6  | 373.1  | 449.7  | 530.9  | 574.6  |
| ▶ 735  | 630      | 10, 12, 14, 16, 20   | 250, 300, 350, 400, 500      |                 |                  | 250            | 120    | 7.3   | 8.1   | 10.5 | 21.3  | 39.0  | 63.8  | 100.1 | 157.3  | 268.2  | 426.6  | 603.5  | 772.8  | 823.1  |
| ▶ 1150 | 1000     | 12, 14, 16, 20       | 300, 350, 400, 500           |                 |                  | 300            | 120    | 11.6  | 13.2  | 16.9 | 32.8  | 61.5  | 100.8 | 163.7 | 289.0  | 496.0  | 748.0  | 995.4  | 1180.2 | 1298.4 |
| ▶ 1560 | 1350     | 14, 16, 20           | 350, 400, 500                |                 |                  | 350            | 120    | 15.0  | 16.2  | 19.1 | 43.4  | 83.9  | 143.1 | 278.6 | 478.6  | 716.8  | 995.4  | 1331.8 | 1615.0 | 1781.7 |
| ▶ 1900 | 1650     | 16, 20               | 400, 500                     |                 |                  | 400            | 120    | 19.1  | 20.8  | 25.5 | 57.9  | 105.9 | 182.5 | 372.0 | 689.0  | 1033.5 | 1363.0 | 1655.5 | 1925.0 | 2111.3 |
| ▶ 2900 | 2500     | 20                   | 500                          |                 |                  | 500            | 120    | 28.9  | 32.4  | 44.3 | 103.3 | 181.5 | 342.2 | 752.6 | 1208.1 | 1653.2 | 2097.1 | 2517.9 | 2843.8 | 3111.1 |

**Table 3251.35:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: Perforated plug without flow divider, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS                  | DN                           | NR              | CH     | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |       |       |        |        |        |        |        |        |        |        |        |
|--------|----------|----------------------|------------------------------|-----------------|--------|----------------|--------|---|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
|        |          |                      |                              |                 |        |                |        | 0   | 5     | 10    | 20    | 30     | 40     | 50     | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 5    | 4        | 1, 1½, 2, 3          | 25, 40, 50, 80               | Perforated plug | Linear | 24             | 15     | 0.046   | 0.29  | 0.48  | 0.91  | 1.4    | 1.9    | 2.4    | 2.9    | 3.5    | 4.1    | 4.9    | 5.6    | 6.4    |
| ▶ 7.5  | 6.3      | 1, 1½, 2, 3          | 25, 40, 50, 80               |                 |        | 24             | 15     | 0.085   | 0.50  | 0.85  | 1.5   | 2.3    | 3.0    | 3.7    | 4.4    | 5.2    | 6.0    | 6.7    | 7.5    | 8.3    |
| ▶ 12   | 10       | 1½, 2, 3             | 40, 50, 80                   |                 |        | 31             | 15     | 0.12  | 0.61  | 1.10  | 2.0   | 3.0    | 4.2    | 5.4    | 6.7    | 8.1    | 9.7    | 11.3   | 12.8   | 14.1   |
| ▶ 20   | 16       | 1½, 2, 3             | 40, 50, 80                   |                 |        | 31             | 15     | 0.33  | 1.7   | 3.1   | 5.4   | 7.8    | 10.2   | 12.5   | 14.3   | 15.7   | 17.0   | 18.1   | 19.1   | 20.0   |
| ▶ 30   | 25       | 1½, 2, 3, 4          | 40, 50, 80, 100              |                 |        | 38             | 15     | 0.007   | 1.3   | 2.9   | 6.8   | 10.5   | 14.3   | 17.5   | 20.8   | 23.2   | 25.4   | 27.1   | 28.7   | 30.0   |
| ▶ 47   | 40       | 2, 3, 4              | 50, 80, 100                  |                 |        | 50             | 30     | 0.62  | 3.0   | 5.5   | 10.8  | 16.9   | 23.7   | 30.4   | 36.7   | 42.3   | 47.1   | 51.0   | 54.1   | 56.1   |
| ▶ 75   | 63       | 3, 4, 6              | 80, 100, 150                 |                 |        | 63             | 30     | 0.73  | 3.4   | 6.5   | 13.8  | 21.2   | 29.7   | 38.5   | 48.4   | 57.3   | 65.0   | 71.7   | 76.1   | 78.7   |
| ▶ 120  | 100      | 3, 4, 6, 8, 10       | 80, 100, 150, 200, 250       |                 |        | 80             | 30     | 1.2   | 8.0   | 15.7  | 30.1  | 43.5   | 55.7   | 68.1   | 78.8   | 89.3   | 99.2   | 107.8  | 114.6  | 120.1  |
| ▶ 150  | 130      | 4, 6, 8, 10, 12      | 100, 150, 200, 250, 300      |                 |        | 100            | 30     | 0.62  | 6.4   | 14.0  | 31.3  | 49.2   | 67.0   | 83.3   | 98.5   | 112.4  | 125.9  | 137.5  | 149.0  | 160.0  |
| ▶ 290  | 250      | 6, 8, 10, 12         | 150, 200, 250, 300           |                 |        | 125            | 60     | 2.8   | 15.0  | 30.0  | 66.6  | 102.0  | 136.1  | 169.6  | 200.9  | 231.7  | 260.8  | 287.1  | 310.2  | 331.7  |
| ▶ 375  | 320      | 6, 8, 10, 12, 14, 16 | 150, 200, 250, 300, 350, 399 |                 |        | 150            | 60     | 3.7   | 19.1  | 36.7  | 77.7  | 122.3  | 172.0  | 221.6  | 266.9  | 305.5  | 336.6  | 360.9  | 379.4  | 393.8  |
| ▶ 580  | 500      | 8, 10, 12, 14, 16    | 200, 250, 300, 350, 400      |                 |        | 200            | 60     | 8.7   | 22.2  | 49.7  | 122.9 | 199.0  | 271.0  | 340.2  | 404.0  | 459.0  | 507.6  | 547.5  | 577.7  | 601.2  |
| ▶ 1040 | 900      | 10, 12, 14, 16, 20   | 250, 300, 350, 400, 500      |                 |        | 250            | 120    | 10.4  | 52.0  | 106.0 | 227.7 | 353.8  | 478.6  | 603.5  | 724.9  | 833.5  | 932.9  | 1019.7 | 1084.7 | 1119.1 |
| ▶ 1500 | 1300     | 12, 14, 16, 20       | 300, 350, 400, 500           |                 |        | 300            | 120    | 15.0  | 129.7 | 249.7 | 461.3 | 653.2  | 839.3  | 1015.0 | 1171.1 | 1298.3 | 1400.0 | 1479.8 | 1533.2 | 1565.7 |
| ▶ 2000 | 1700     | 14, 16, 20           | 350, 400, 500                |                 |        | 350            | 120    | 19.7  | 101.7 | 194.0 | 409.3 | 642.8  | 897.7  | 1168.8 | 1404.6 | 1600.0 | 1776.9 | 1929.5 | 2028.9 | 2068.6 |
| ▶ 2450 | 2100     | 16, 20               | 400, 500                     |                 |        | 400            | 120    | 24.3  | 200.4 | 379.3 | 702.9 | 1011.6 | 1328.3 | 1622.0 | 1890.2 | 2115.6 | 2287.7 | 2421.7 | 2527.2 | 2569.1 |
| ▶ 3700 | 3200     | 20                   | 500                          |                 |        | 500            | 120    | 37.0  | 261.5 | 487.2 | 984.3 | 1453.8 | 1890.5 | 2285.0 | 2642.9 | 2953.6 | 3227.9 | 3466.0 | 3657.6 | 3735.9 |

**Table 3251.36:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: Perforated plug with flow divider St I, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS                  | DN                           | NR                       | CH               | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient (CV coefficient) |       |      |       |       |       |       |        |        |        |        |        |        |
|--------|----------|----------------------|------------------------------|--------------------------|------------------|----------------|--------|---|-------|------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|
|        |          |                      |                              |                          |                  |                |        | 0   | 5     | 10   | 20    | 30    | 40    | 50    | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 4.2  | 3.6      | 1, 1½, 2, 3          | 25, 40, 50, 80               | Perforated plug Snd St I | Equal percentage | 24             | 15     | 0.033   | 0.087 | 0.13 | 0.21  | 0.30  | 0.45  | 0.67  | 1.00   | 1.5    | 2.1    | 3.1    | 4.7    | 6.2    |
| ▶ 7    | 5.7      | 1, 1½, 2, 3          | 25, 40, 50, 80               |                          |                  | 24             | 15     | 0.073   | 0.16  | 0.22 | 0.33  | 0.51  | 0.71  | 1.06  | 1.7    | 2.6    | 3.7    | 5.2    | 6.7    | 7.4    |
| ▶ 10.5 | 9        | 1½, 2, 3             | 40, 50, 80                   |                          |                  | 31             | 15     | 0.20  | 0.22  | 0.25 | 0.38  | 0.66  | 1.04  | 1.7   | 2.8    | 4.7    | 7.5    | 10.2   | 12.5   | 14.6   |
| ▶ 17   | 14.5     | 1½, 2, 3, 4          | 40, 50, 80, 100              |                          |                  | 38             | 15     | 0.33  | 0.50  | 0.68 | 1.10  | 1.5   | 2.2   | 3.2   | 5.0    | 8.1    | 11.5   | 14.9   | 18.1   | 20.9   |
| ▶ 26   | 22       | 2, 3, 4              | 50, 80, 100                  |                          |                  | 50             | 15     | 0.54  | 0.92  | 1.23 | 1.7   | 2.6   | 3.9   | 6.9   | 11.1   | 15.7   | 20.0   | 24.2   | 27.9   | 31.6   |
| ▶ 37   | 32       | 2, 3, 4              | 50, 80, 100                  |                          |                  | 50             | 30     | 0.42  | 1.06  | 1.41 | 2.1   | 3.4   | 5.4   | 9.0   | 14.2   | 20.1   | 27.2   | 34.0   | 39.1   | 43.2   |
| ▶ 55   | 47       | 3, 4, 6              | 80, 100, 150                 |                          |                  | 63             | 30     | 0.62  | 0.94  | 1.2  | 1.8   | 3.3   | 5.6   | 9.5   | 17.1   | 26.7   | 37.9   | 49.5   | 56.8   | 61.1   |
| ▶ 67   | 57       | 3, 4, 6, 8, 10       | 80, 100, 150, 200, 250       |                          |                  | 80             | 30     | 0.73  | 1.2   | 1.7  | 3.0   | 4.7   | 7.0   | 10.3  | 16.2   | 28.5   | 44.2   | 57.4   | 66.7   | 74.6   |
| ▶ 85   | 72       | 3, 4, 6, 8, 10       | 80, 100, 150, 200, 250       |                          |                  | 80             | 30     | 0.92  | 1.2   | 1.5  | 2.5   | 4.7   | 11.2  | 22.7  | 42.7   | 57.7   | 70.0   | 80.3   | 87.5   | 93.0   |
| ▶ 105  | 90       | 4, 6, 8, 10, 12      | 100, 150, 200, 250, 300      |                          |                  | 100            | 30     | 1.2   | 1.5   | 2.0  | 3.7   | 6.6   | 11.1  | 18.3  | 30.2   | 45.3   | 63.8   | 85.5   | 100.7  | 109.9  |
| ▶ 170  | 144      | 6, 8, 10, 12         | 150, 200, 250, 300           |                          |                  | 125            | 60     | 1.8   | 2.3   | 3.1  | 6.6   | 11.6  | 17.8  | 26.2  | 39.1   | 56.0   | 87.9   | 131.6  | 167.0  | 196.2  |
| ▶ 265  | 225      | 6, 8, 10, 12, 14, 16 | 150, 200, 250, 300, 350, 400 |                          |                  | 150            | 60     | 2.9   | 4.2   | 5.7  | 10.5  | 17.7  | 27.9  | 42.8  | 77.3   | 125.6  | 182.8  | 234.2  | 266.6  | 293.6  |
| ▶ 375  | 320      | 8, 10, 12, 14, 16    | 200, 250, 300, 350, 400      |                          |                  | 200            | 60     | 4.2   | 5.3   | 6.9  | 12.8  | 20.4  | 35.8  | 63.4  | 108.7  | 170.4  | 240.9  | 317.3  | 381.3  | 416.0  |
| ▶ 435  | 375      | 8, 10, 12, 14, 16    | 200, 250, 300, 350, 400      |                          |                  | 200            | 60     | 4.9   | 6.5   | 9.7  | 22.8  | 61.6  | 115.6 | 172.3 | 234.7  | 294.4  | 356.6  | 424.3  | 486.7  | 524.0  |
| ▶ 650  | 560      | 10, 12, 14, 16, 20   | 250, 300, 350, 400, 500      |                          |                  | 250            | 120    | 7.3   | 8.1   | 10.5 | 21.3  | 39.0  | 63.8  | 100.1 | 157.3  | 262.6  | 410.2  | 571.8  | 718.7  | 759.7  |
| ▶ 1040 | 900      | 12, 14, 16, 20       | 300, 350, 400, 500           |                          |                  | 300            | 120    | 11.6  | 13.2  | 16.9 | 32.8  | 61.5  | 100.8 | 163.7 | 289.0  | 480.3  | 704.8  | 917.0  | 1056.2 | 1148.4 |
| ▶ 1400 | 1200     | 14, 16, 20           | 350, 400, 500                |                          |                  | 350            | 120    | 15.0  | 16.2  | 19.1 | 43.4  | 83.9  | 143.1 | 278.6 | 478.6  | 699.6  | 951.6  | 1251.9 | 1485.8 | 1624.9 |
| ▶ 1730 | 1500     | 16, 20               | 400, 500                     |                          |                  | 400            | 120    | 19.1  | 20.8  | 25.5 | 57.9  | 105.9 | 182.5 | 372.0 | 689.0  | 1008.7 | 1303.0 | 1556.2 | 1771.0 | 1925.5 |
| ▶ 2600 | 2250     | 20                   | 500                          |                          |                  | 500            | 120    | 28.9  | 32.4  | 44.3 | 103.3 | 181.5 | 342.2 | 752.6 | 1208.1 | 1613.5 | 2004.8 | 2366.8 | 2616.3 | 2837.4 |

**Table 3251.37:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: Perforated plug with flow divider St I, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS                  | DN                           | NR                       | CH     | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |       |       |        |        |        |        |        |        |        |        |        |
|--------|----------|----------------------|------------------------------|--------------------------|--------|----------------|--------|---|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
|        |          |                      |                              |                          |        |                |        | 0   | 5     | 10    | 20    | 30     | 40     | 50     | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 4.2  | 3.6      | 1, 1½, 2, 3          | 25, 40, 50, 80               | Perforated plug and St I | Linear | 24             | 15     | 0.046   | 0.29  | 0.48  | 0.90  | 1.4    | 1.9    | 2.3    | 2.9    | 3.4    | 4.1    | 4.8    | 5.6    | 6.3    |
| ▶ 7    | 5.7      | 1, 1½, 2, 3          | 25, 40, 50, 80               |                          |        | 24             | 15     | 0.085   | 0.50  | 0.84  | 1.5   | 2.2    | 3.0    | 3.7    | 4.4    | 5.1    | 5.9    | 6.7    | 7.4    | 8.2    |
| ▶ 10.5 | 9        | 1½, 2, 3             | 40, 50, 80                   |                          |        | 31             | 15     | 0.12  | 0.61  | 1.09  | 2.0   | 3.0    | 4.1    | 5.3    | 6.7    | 8.1    | 9.6    | 11.2   | 12.7   | 13.9   |
| ▶ 17   | 14.5     | 1½, 2, 3             | 40, 50, 80                   |                          |        | 31             | 15     | 0.33  | 1.73  | 3.0   | 5.4   | 7.8    | 10.1   | 12.3   | 14.1   | 15.5   | 16.8   | 17.9   | 18.9   | 19.8   |
| ▶ 26   | 22       | 1½, 2, 3, 4          | 40, 50, 80, 100              |                          |        | 38             | 15     | 0.007   | 1.3   | 2.7   | 6.2   | 9.6    | 13.0   | 16.0   | 18.9   | 21.1   | 23.1   | 24.7   | 26.1   | 27.3   |
| ▶ 42   | 36       | 2, 3, 4              | 50, 80, 100                  |                          |        | 50             | 30     | 0.62  | 3.0   | 5.2   | 10.0  | 15.7   | 22.1   | 28.3   | 34.2   | 39.3   | 43.8   | 47.4   | 50.3   | 52.2   |
| ▶ 67   | 57       | 3, 4, 6              | 80, 100, 150                 |                          |        | 63             | 30     | 0.73  | 3.4   | 6.0   | 12.1  | 18.6   | 26.1   | 33.9   | 42.6   | 50.4   | 57.2   | 63.1   | 67.0   | 69.2   |
| ▶ 105  | 90       | 3, 4, 6, 8, 10       | 80, 100, 150, 200, 250       |                          |        | 80             | 30     | 1.2   | 8.0   | 14.6  | 26.5  | 38.3   | 49.0   | 59.9   | 69.4   | 78.6   | 87.3   | 94.9   | 100.8  | 105.7  |
| ▶ 135  | 115      | 4, 6, 8, 10, 12      | 100, 150, 200, 250, 300      |                          |        | 100            | 30     | 0.62  | 6.4   | 13.2  | 28.2  | 44.3   | 60.3   | 75.0   | 88.6   | 101.1  | 113.3  | 123.7  | 134.1  | 144.0  |
| ▶ 265  | 225      | 6, 8, 10, 12         | 150, 200, 250, 300           |                          |        | 125            | 60     | 2.8   | 15.0  | 26.4  | 53.3  | 81.6   | 108.9  | 135.7  | 160.7  | 185.3  | 208.6  | 229.6  | 248.1  | 265.3  |
| ▶ 325  | 280      | 6, 8, 10, 12, 14, 16 | 150, 200, 250, 300, 350, 400 |                          |        | 150            | 60     | 3.7   | 19.1  | 35.0  | 71.5  | 112.5  | 158.3  | 203.9  | 245.6  | 281.1  | 309.7  | 332.1  | 349.1  | 362.3  |
| ▶ 520  | 450      | 8, 10, 12, 14, 16    | 200, 250, 300, 350, 400      |                          |        | 200            | 60     | 8.7   | 22.2  | 47.6  | 114.3 | 185.0  | 252.1  | 316.4  | 375.7  | 426.8  | 472.1  | 509.2  | 537.3  | 559.1  |
| ▶ 950  | 800      | 10, 12, 14, 16, 20   | 250, 300, 350, 400, 500      |                          |        | 250            | 120    | 10.4  | 52.0  | 100.2 | 207.2 | 321.9  | 435.5  | 549.2  | 659.6  | 758.5  | 849.0  | 928.0  | 987.1  | 1018.3 |
| ▶ 1350 | 1150     | 12, 14, 16, 20       | 300, 350, 400, 500           |                          |        | 300            | 120    | 15.0  | 129.7 | 234.7 | 415.1 | 587.9  | 755.4  | 913.5  | 1054.0 | 1168.4 | 1260.0 | 1331.8 | 1379.9 | 1409.1 |
| ▶ 1800 | 1530     | 14, 16, 20           | 350, 400, 500                |                          |        | 350            | 120    | 19.7  | 101.7 | 188.6 | 386.3 | 599.1  | 829.4  | 1075.3 | 1292.3 | 1472.0 | 1634.7 | 1775.1 | 1866.6 | 1903.1 |
| ▶ 2200 | 1900     | 16, 20               | 400, 500                     |                          |        | 400            | 120    | 24.3  | 200.4 | 368.7 | 669.2 | 950.9  | 1232.7 | 1492.2 | 1739.0 | 1946.4 | 2104.7 | 2228.0 | 2325.0 | 2363.6 |
| ▶ 3300 | 2900     | 20                   | 500                          |                          |        | 500            | 120    | 37.0  | 261.5 | 463.9 | 905.6 | 1337.5 | 1739.3 | 2102.2 | 2431.4 | 2717.3 | 2969.6 | 3188.7 | 3365.0 | 3437.0 |



**Table 3251.38:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: Perforated plug with flow divider St II, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS                  | DN                           | NR                        | CH               | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |      |      |       |       |       |       |        |        |        |        |        |
|--------|----------|----------------------|------------------------------|---------------------------|------------------|----------------|--------|---|-------|------|------|-------|-------|-------|-------|--------|--------|--------|--------|--------|
|        |          |                      |                              |                           |                  |                |        | 0   | 5     | 10   | 20   | 30    | 40    | 50    | 60    | 70     | 80     | 90     | 100    | 110    |
| ▶ 3.7  | 3.2      | 2, 3                 | 50, 80                       | Perforated plug and St II | Equal percentage | 24             | 15     | 0.033   | 0.087 | 0.13 | 0.21 | 0.30  | 0.45  | 0.67  | 1.00  | 1.5    | 2.1    | 3.1    | 4.7    | 6.1    |
| ▶ 6    | 5        | 2, 3                 | 50, 80                       |                           |                  | 24             | 15     | 0.073   | 0.16  | 0.22 | 0.33 | 0.51  | 0.71  | 1.06  | 1.7   | 2.6    | 3.7    | 5.1    | 6.6    | 7.3    |
| ▶ 9.5  | 8        | 2, 3                 | 50, 80                       |                           |                  | 31             | 15     | 0.20  | 0.22  | 0.25 | 0.38 | 0.66  | 1.04  | 1.7   | 2.8   | 4.7    | 7.5    | 10.1   | 12.3   | 14.4   |
| ▶ 15   | 13       | 2, 3, 4              | 50, 80, 100                  |                           |                  | 38             | 15     | 0.33  | 0.50  | 0.68 | 1.10 | 1.5   | 2.2   | 3.2   | 5.0   | 8.1    | 11.4   | 14.8   | 17.9   | 20.7   |
| ▶ 23   | 20       | 2, 3, 4              | 50, 80, 100                  |                           |                  | 50             | 15     | 0.54  | 0.92  | 1.23 | 1.7  | 2.6   | 3.9   | 6.9   | 11.1  | 15.6   | 19.8   | 24.0   | 27.6   | 31.2   |
| ▶ 34   | 29       | 2, 3, 4              | 50, 80, 100                  |                           |                  | 50             | 30     | 0.42  | 1.06  | 1.41 | 2.1  | 3.4   | 5.4   | 9.0   | 14.2  | 20.0   | 27.0   | 33.7   | 38.7   | 42.7   |
| ▶ 50   | 43       | 3, 4, 6              | 80, 100, 150                 |                           |                  | 63             | 30     | 0.62  | 0.94  | 1.2  | 1.8  | 3.3   | 5.6   | 9.5   | 17.1  | 26.6   | 37.7   | 49.1   | 56.1   | 60.4   |
| ▶ 60   | 50       | 3, 4, 6, 8, 10       | 80, 100, 150, 200, 250       |                           |                  | 80             | 30     | 0.73  | 1.2   | 1.7  | 3.0  | 4.7   | 7.0   | 10.3  | 16.2  | 28.4   | 44.0   | 56.9   | 65.9   | 73.7   |
| ▶ 75   | 63       | 3, 4, 6, 8, 10       | 80, 100, 150, 200, 250       |                           |                  | 80             | 30     | 0.92  | 1.2   | 1.5  | 2.5  | 4.7   | 11.2  | 22.7  | 42.0  | 58.1   | 69.3   | 78.3   | 84.5   | 88.6   |
| ▶ 95   | 80       | 4, 6, 8, 10, 12      | 100, 150, 200, 250, 300      |                           |                  | 100            | 30     | 1.2   | 1.5   | 2.0  | 3.7  | 6.6   | 11.1  | 18.3  | 29.6  | 45.5   | 62.5   | 81.9   | 94.9   | 101.7  |
| ▶ 145  | 125      | 6, 8, 10, 12         | 150, 200, 250, 300           |                           |                  | 125            | 60     | 1.8   | 2.3   | 3.1  | 6.6  | 11.6  | 17.8  | 26.2  | 38.4  | 55.8   | 85.1   | 124.1  | 153.9  | 177.0  |
| ▶ 235  | 200      | 6, 8, 10, 12, 14, 16 | 150, 200, 250, 300, 350, 400 |                           |                  | 150            | 60     | 2.9   | 4.2   | 5.7  | 10.5 | 17.7  | 27.9  | 42.8  | 76.1  | 124.6  | 175.9  | 219.2  | 243.4  | 262.7  |
| ▶ 335  | 290      | 8, 10, 12, 14, 16    | 200, 250, 300, 350, 400      |                           |                  | 200            | 60     | 4.2   | 5.3   | 6.9  | 12.8 | 20.4  | 35.8  | 63.4  | 106.9 | 169.0  | 231.9  | 297.1  | 348.2  | 372.2  |
| ▶ 390  | 340      | 8, 10, 12, 14, 16    | 200, 250, 300, 350, 400      |                           |                  | 200            | 60     | 4.9   | 6.5   | 9.7  | 22.8 | 61.6  | 115.6 | 172.3 | 230.9 | 292.0  | 343.2  | 398.8  | 445.9  | 468.8  |
| ▶ 580  | 500      | 10, 12, 14, 16, 20   | 250, 300, 350, 400, 500      |                           |                  | 250            | 120    | 7.3   | 8.1   | 10.5 | 21.3 | 39.0  | 63.8  | 100.1 | 157.3 | 256.9  | 393.7  | 540.1  | 664.6  | 696.4  |
| ▶ 950  | 800      | 12, 14, 16, 20       | 300, 350, 400, 500           |                           |                  | 300            | 120    | 11.6  | 13.2  | 16.9 | 32.8 | 61.5  | 100.8 | 163.7 | 284.7 | 481.1  | 691.9  | 883.4  | 1003.1 | 1074.4 |
| ▶ 1250 | 1080     | 14, 16, 20           | 350, 400, 500                |                           |                  | 350            | 120    | 15.0  | 16.2  | 19.1 | 43.4 | 83.9  | 143.1 | 278.6 | 471.0 | 693.8  | 915.7  | 1172.0 | 1356.6 | 1453.8 |
| ▶ 1530 | 1320     | 16, 20               | 400, 500                     |                           |                  | 400            | 120    | 19.1  | 20.8  | 25.5 | 57.9 | 105.9 | 182.5 | 372.0 | 678.0 | 1000.5 | 1254.0 | 1456.8 | 1617.0 | 1722.8 |

**Table 3251.39:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: Perforated plug with flow divider St II, with linear characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS                  | DN                           | NR                        | CH     | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |       |       |       |        |        |        |        |        |        |        |        |
|--------|----------|----------------------|------------------------------|---------------------------|--------|----------------|--------|---|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
|        |          |                      |                              |                           |        |                |        | 0   | 5     | 10    | 20    | 30    | 40     | 50     | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 3.7  | 3.2      | 2, 3                 | 50, 80                       | Perforated plug and St II | Linear | 24             | 15     | 0.046   | 0.29  | 0.48  | 0.89  | 1.4   | 1.9    | 2.3    | 2.9    | 3.4    | 4.0    | 4.8    | 5.5    | 6.2    |
| ▶ 6    | 5        | 2, 3                 | 50, 80                       |                           |        | 24             | 15     | 0.085   | 0.50  | 0.84  | 1.5   | 2.2   | 2.9    | 3.6    | 4.3    | 5.1    | 5.8    | 6.6    | 7.4    | 8.1    |
| ▶ 9.5  | 8        | 2, 3                 | 50, 80                       |                           |        | 31             | 15     | 0.12  | 0.61  | 1.09  | 2.0   | 3.0   | 4.1    | 5.3    | 6.6    | 8.0    | 9.5    | 11.1   | 12.6   | 13.8   |
| ▶ 15   | 13       | 2, 3                 | 50, 80                       |                           |        | 31             | 15     | 0.33  | 1.7   | 3.0   | 5.3   | 7.7   | 10.0   | 12.2   | 14.0   | 15.3   | 16.6   | 17.7   | 18.7   | 19.6   |
| ▶ 23   | 20       | 2, 3, 4              | 50, 80, 100                  |                           |        | 38             | 15     | 0.007   | 1.3   | 2.6   | 5.5   | 8.5   | 11.6   | 14.2   | 16.8   | 18.8   | 20.6   | 22.0   | 23.3   | 24.3   |
| ▶ 37   | 32       | 2, 3, 4              | 50, 80, 100                  |                           |        | 50             | 30     | 0.62  | 3.0   | 5.2   | 9.9   | 15.5  | 21.8   | 28.0   | 33.8   | 38.9   | 43.3   | 46.9   | 49.8   | 51.6   |
| ▶ 60   | 50       | 3, 4, 6              | 80, 100, 150                 |                           |        | 63             | 30     | 0.73  | 3.4   | 6.0   | 12.0  | 18.4  | 25.8   | 33.5   | 42.1   | 49.8   | 56.6   | 62.3   | 66.2   | 68.4   |
| ▶ 95   | 80       | 3, 4, 6, 8, 10       | 80, 100, 150, 200, 250       |                           |        | 80             | 30     | 1.2   | 8.0   | 14.2  | 25.3  | 36.5  | 46.8   | 57.2   | 66.2   | 75.0   | 83.3   | 90.5   | 96.2   | 100.9  |
| ▶ 120  | 105      | 4, 6, 8, 10, 12      | 100, 150, 200, 250, 300      |                           |        | 100            | 30     | 0.62  | 6.4   | 12.5  | 25.7  | 40.4  | 54.9   | 68.3   | 80.8   | 92.1   | 103.2  | 112.7  | 122.2  | 131.2  |
| ▶ 235  | 200      | 6, 8, 10, 12         | 150, 200, 250, 300           |                           |        | 125            | 60     | 2.8   | 14.3  | 25.3  | 49.3  | 75.5  | 100.7  | 125.5  | 148.7  | 171.4  | 193.0  | 212.4  | 229.5  | 245.4  |
| ▶ 295  | 255      | 6, 8, 10, 12, 14, 16 | 150, 200, 250, 300, 350, 400 |                           |        | 150            | 60     | 3.7   | 19.1  | 33.2  | 65.3  | 102.7 | 144.5  | 186.2  | 224.2  | 256.7  | 282.8  | 303.2  | 318.7  | 330.8  |
| ▶ 465  | 400      | 8, 10, 12, 14, 16    | 200, 250, 300, 350, 400      |                           |        | 200            | 60     | 8.7   | 22.2  | 45.5  | 105.7 | 171.1 | 233.1  | 292.6  | 347.4  | 394.7  | 436.6  | 470.9  | 496.8  | 517.0  |
| ▶ 835  | 720      | 10, 12, 14, 16, 20   | 250, 300, 350, 400, 500      |                           |        | 250            | 120    | 10.4  | 52.0  | 94.5  | 186.8 | 290.1 | 392.5  | 494.8  | 594.4  | 683.5  | 765.0  | 836.2  | 889.5  | 917.6  |
| ▶ 1200 | 1030     | 12, 14, 16, 20       | 300, 350, 400, 500           |                           |        | 300            | 120    | 15.0  | 129.7 | 219.7 | 400.0 | 552.6 | 693.6  | 832.3  | 960.3  | 1064.6 | 1148.0 | 1213.4 | 1257.2 | 1283.9 |
| ▶ 1560 | 1350     | 14, 16, 20           | 350, 400, 500                |                           |        | 350            | 120    | 19.7  | 101.7 | 183.1 | 363.4 | 555.4 | 761.2  | 981.8  | 1179.9 | 1344.0 | 1492.6 | 1620.8 | 1704.3 | 1737.6 |
| ▶ 1940 | 1680     | 16, 20               | 400, 500                     |                           |        | 400            | 120    | 24.3  | 200.4 | 358.1 | 635.4 | 890.2 | 1137.0 | 1362.5 | 1587.7 | 1777.1 | 1921.7 | 2034.3 | 2122.9 | 2158.0 |

**Table 3251.40:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: Perforated plug with flow divider St III, with equal percentage characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS               | DN                      | NR                         | CH               | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |      |      |       |       |       |       |       |        |        |        |        |
|--------|----------|-------------------|-------------------------|----------------------------|------------------|----------------|--------|---|-------|------|------|-------|-------|-------|-------|-------|--------|--------|--------|--------|
|        |          |                   |                         |                            |                  |                |        | 0   | 5     | 10   | 20   | 30    | 40    | 50    | 60    | 70    | 80     | 90     | 100    | 110    |
| ▶ 3.5  | 3        | 2, 3              | 50, 80                  | Perforated plug and St III | Equal percentage | 24             | 15     | 0.033   | 0.087 | 0.13 | 0.21 | 0.30  | 0.45  | 0.67  | 1.00  | 1.5   | 2.1    | 3.1    | 4.6    | 6.1    |
| ▶ 5.6  | 4.8      | 2, 3              | 50, 80                  |                            |                  | 24             | 15     | 0.073   | 0.16  | 0.22 | 0.33 | 0.51  | 0.71  | 1.06  | 1.7   | 2.6   | 3.7    | 5.1    | 6.5    | 7.3    |
| ▶ 9    | 7.5      | 3                 | 80                      |                            |                  | 31             | 15     | 0.20  | 0.22  | 0.25 | 0.38 | 0.66  | 1.04  | 1.7   | 2.8   | 4.7   | 7.4    | 10.0   | 12.2   | 14.3   |
| ▶ 14   | 12       | 3, 4              | 80, 100                 |                            |                  | 38             | 15     | 0.33  | 0.50  | 0.68 | 1.10 | 1.5   | 2.2   | 3.2   | 5.0   | 8.1   | 11.4   | 14.7   | 17.7   | 20.5   |
| ▶ 23   | 20       | 3, 4              | 80, 100                 |                            |                  | 50             | 15     | 0.54  | 0.92  | 1.23 | 1.7  | 2.6   | 3.9   | 6.9   | 11.1  | 15.6  | 19.7   | 23.8   | 27.3   | 30.8   |
| ▶ 31   | 27       | 3, 4              | 80, 100                 |                            |                  | 50             | 30     | 0.42  | 1.06  | 1.41 | 2.1  | 3.4   | 5.4   | 9.0   | 14.2  | 20.0  | 26.9   | 33.5   | 38.3   | 42.1   |
| ▶ 47   | 40       | 4, 6              | 100, 150                |                            |                  | 63             | 30     | 0.62  | 0.94  | 1.2  | 1.8  | 3.3   | 5.6   | 9.5   | 17.1  | 26.5  | 37.5   | 48.7   | 55.5   | 59.6   |
| ▶ 55   | 47       | 6, 8, 10          | 150, 200, 250           |                            |                  | 80             | 30     | 0.73  | 1.2   | 1.7  | 3.0  | 4.7   | 7.0   | 10.3  | 16.2  | 28.3  | 43.7   | 56.4   | 65.2   | 72.7   |
| ▶ 70   | 60       | 6, 8, 10          | 150, 200, 250           |                            |                  | 80             | 30     | 0.92  | 1.2   | 1.5  | 2.5  | 4.7   | 11.2  | 22.7  | 41.9  | 57.7  | 68.2   | 76.3   | 81.5   | 84.9   |
| ▶ 90   | 75       | 6, 8, 10, 12      | 150, 200, 250, 300      |                            |                  | 100            | 30     | 1.2   | 1.5   | 2.0  | 3.7  | 6.6   | 11.1  | 18.3  | 29.5  | 45.1  | 61.1   | 79.1   | 90.3   | 95.8   |
| ▶ 140  | 120      | 6, 8, 10, 12      | 150, 200, 250, 300      |                            |                  | 125            | 60     | 1.8   | 2.3   | 3.1  | 6.6  | 11.6  | 17.8  | 26.2  | 38.1  | 54.9  | 81.4   | 115.5  | 138.9  | 156.5  |
| ▶ 220  | 190      | 8, 10, 12, 14, 16 | 200, 250, 300, 350, 400 |                            |                  | 150            | 60     | 2.9   | 4.2   | 5.7  | 10.5 | 17.7  | 27.9  | 42.8  | 75.9  | 124.0 | 174.0  | 215.5  | 237.6  | 255.3  |
| ▶ 315  | 270      | 10, 12, 14, 16    | 250, 300, 350, 400      |                            |                  | 200            | 60     | 4.2   | 5.3   | 6.9  | 12.8 | 20.4  | 35.8  | 63.4  | 106.2 | 166.5 | 223.0  | 279.3  | 319.2  | 335.5  |
| ▶ 365  | 315      | 10, 12, 14, 16    | 250, 300, 350, 400      |                            |                  | 200            | 60     | 4.9   | 6.5   | 9.7  | 22.8 | 61.6  | 115.6 | 172.3 | 229.6 | 284.3 | 332.7  | 380.3  | 419.7  | 437.0  |
| ▶ 560  | 480      | 12, 14, 16, 20    | 300, 350, 400, 500      |                            |                  | 250            | 120    | 7.3   | 8.1   | 10.5 | 21.3 | 39.0  | 63.8  | 100.1 | 153.8 | 256.4 | 379.7  | 503.9  | 602.8  | 626.6  |
| ▶ 880  | 750      | 14, 16, 20        | 350, 400, 500           |                            |                  | 300            | 120    | 11.6  | 13.2  | 16.9 | 32.8 | 61.5  | 100.8 | 163.7 | 280.9 | 468.2 | 643.3  | 786.3  | 849.7  | 880.3  |
| ▶ 1150 | 1000     | 14, 16, 20        | 350, 400, 500           |                            |                  | 350            | 120    | 15.0  | 16.2  | 19.1 | 43.4 | 83.9  | 143.1 | 278.6 | 465.7 | 678.1 | 887.9  | 1062.1 | 1179.0 | 1228.5 |
| ▶ 1450 | 1250     | 20                | 500                     |                            |                  | 400            | 120    | 19.1  | 20.8  | 25.5 | 57.9 | 105.9 | 182.5 | 372.0 | 671.1 | 979.8 | 1185.8 | 1332.7 | 1424.5 | 1480.0 |

**Table 3251.41:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: Perforated plug with flow divider St III with linear characteristic · Version with bellows seal up to max. 100 % travel

| $C_v$  | $K_{vs}$ | NPS               | DN                      | NR                         | CH     | Seat Ø<br>[mm] | Travel | Travel in % · Flow coefficient ( $C_v$ coefficient) |       |       |       |       |        |        |        |        |        |        |        |        |
|--------|----------|-------------------|-------------------------|----------------------------|--------|----------------|--------|---|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
|        |          |                   |                         |                            |        |                |        | 0   | 5     | 10    | 20    | 30    | 40     | 50     | 60     | 70     | 80     | 90     | 100    | 110    |
| ▶ 3.5  | 3        | 2, 3              | 50, 80                  | Perforated plug and St III | Linear | 24             | 15     | 0.046   | 0.29  | 0.47  | 0.88  | 1.3   | 1.8    | 2.3    | 2.8    | 3.4    | 4.0    | 4.7    | 5.4    | 6.2    |
| ▶ 5.6  | 4.8      | 2, 3              | 50, 80                  |                            |        | 24             | 15     | 0.085   | 0.50  | 0.83  | 1.5   | 2.2   | 2.9    | 3.6    | 4.3    | 5.0    | 5.8    | 6.5    | 7.3    | 8.0    |
| ▶ 9    | 7.5      | 3                 | 80                      |                            |        | 31             | 15     | 0.12  | 0.61  | 1.08  | 2.0   | 2.9   | 4.1    | 5.2    | 6.5    | 7.9    | 9.4    | 11.0   | 12.4   | 13.6   |
| ▶ 14   | 12       | 3                 | 80                      |                            |        | 31             | 15     | 0.33  | 1.7   | 3.0   | 5.3   | 7.6   | 9.9    | 12.1   | 13.8   | 15.2   | 16.5   | 17.5   | 18.5   | 19.4   |
| ▶ 23   | 20       | 3, 4              | 80, 100                 |                            |        | 38             | 15     | 0.007   | 1.3   | 2.7   | 6.1   | 9.4   | 12.7   | 15.6   | 18.5   | 20.7   | 22.6   | 24.1   | 25.5   | 26.7   |
| ▶ 35   | 30       | 3, 4              | 80, 100                 |                            |        | 50             | 30     | 0.62  | 3.0   | 5.2   | 9.8   | 15.4  | 21.6   | 27.6   | 33.4   | 38.5   | 42.8   | 46.4   | 49.3   | 51.1   |
| ▶ 55   | 47       | 4, 6              | 100, 150                |                            |        | 63             | 30     | 0.73  | 3.4   | 5.9   | 11.8  | 18.2  | 25.6   | 33.1   | 41.6   | 49.3   | 55.9   | 61.6   | 65.4   | 67.7   |
| ▶ 90   | 75       | 6, 8, 10          | 150, 200, 250           |                            |        | 80             | 30     | 1.2   | 8.0   | 14.0  | 24.7  | 35.6  | 45.7   | 55.8   | 64.7   | 73.2   | 81.3   | 88.4   | 93.9   | 98.5   |
| ▶ 120  | 100      | 6, 8, 10, 12      | 150, 200, 250, 300      |                            |        | 100            | 30     | 0.6   | 6.4   | 11.9  | 23.5  | 36.9  | 50.3   | 62.5   | 73.9   | 84.3   | 94.4   | 103.1  | 111.8  | 120.0  |
| ▶ 220  | 190      | 6, 8, 10, 12      | 150, 200, 250, 300      |                            |        | 125            | 60     | 2.8   | 14.2  | 24.0  | 44.6  | 68.3  | 91.2   | 113.6  | 134.6  | 155.2  | 174.7  | 192.3  | 207.8  | 222.2  |
| ▶ 270  | 230      | 8, 10, 12, 14, 16 | 200, 250, 300, 350, 400 |                            |        | 150            | 60     | 3.7   | 19.1  | 31.7  | 59.8  | 94.2  | 132.5  | 170.6  | 205.5  | 235.3  | 259.2  | 277.9  | 292.2  | 303.2  |
| ▶ 435  | 375      | 10, 12, 14, 16    | 250, 300, 350, 400      |                            |        | 200            | 60     | 8.7   | 22.2  | 42.6  | 93.4  | 151.2 | 206.0  | 258.6  | 307.0  | 348.8  | 385.8  | 416.1  | 439.1  | 456.9  |
| ▶ 780  | 675      | 12, 14, 16, 20    | 300, 350, 400, 500      |                            |        | 250            | 120    | 10.4  | 52.0  | 86.9  | 159.4 | 247.6 | 335.0  | 422.4  | 507.4  | 583.5  | 653.1  | 713.8  | 759.3  | 783.3  |
| ▶ 1100 | 950      | 14, 16, 20        | 350, 400, 500           |                            |        | 300            | 120    | 15.0  | 129.7 | 217.1 | 360.9 | 491.2 | 606.9  | 720.7  | 831.5  | 921.8  | 994.0  | 1050.6 | 1088.6 | 1111.6 |
| ▶ 1475 | 1275     | 14, 16, 20        | 350, 400, 500           |                            |        | 350            | 120    | 19.7  | 101.7 | 176.4 | 334.8 | 500.7 | 675.9  | 864.9  | 1039.4 | 1184.0 | 1314.9 | 1427.8 | 1501.4 | 1530.7 |
| ▶ 1860 | 1600     | 20                | 500                     |                            |        | 400            | 120    | 24.3  | 200.4 | 347.5 | 601.7 | 829.5 | 1041.4 | 1232.7 | 1436.5 | 1607.9 | 1738.6 | 1840.5 | 1920.7 | 1952.5 |

**Table 3251.42:**  $C_v$  coefficients (gpm) for Type 3251 Globe Valve: without trim (PN 40)

| Seat Ø<br>[mm] | Flow coefficient $C_v$ without trim |       |        |       |       |       |       |       |        |        |        |        |        |
|----------------|-------------------------------------|-------|--------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|
|                | NPS ½                               | NPS 1 | NPS 1½ | NPS 2 | NPS 3 | NPS 4 | NPS 6 | NPS 8 | NPS 10 | NPS 12 | NPS 14 | NPS 16 | NPS 20 |
| 6              | 1.5                                 | 1.7   | 2.1    | -     | -     | -     | -     | -     | -      | -      | -      | -      | -      |
| 12             | 5.2                                 | 5.7   | 5.8    | -     | -     | -     | -     | -     | -      | -      | -      | -      | -      |
| 24             | 5.7                                 | 16.2  | 21     | 24    | 26.5  | -     | -     | -     | -      | -      | -      | -      | -      |
| 31             | -                                   | -     | 30     | 37    | 41.5  | -     | -     | -     | -      | -      | -      | -      | -      |
| 38             | -                                   | -     | 34.5   | 47.5  | 48.5  | 52    | -     | -     | -      | -      | -      | -      | -      |
| 50             | -                                   | -     | -      | 58    | 93    | 95    | -     | -     | -      | -      | -      | -      | -      |
| 63             | -                                   | -     | -      | -     | 125   | 141   | 162   | -     | -      | -      | -      | -      | -      |
| 80             | -                                   | -     | -      | -     | 141   | 173   | 249   | 255   | 260    | -      | -      | -      | -      |
| 100            | -                                   | -     | -      | -     | -     | 217   | 271   | 364   | 375    | 380    | -      | -      | -      |
| 125            | -                                   | -     | -      | -     | -     | -     | 385   | 572   | 583    | 591    | -      | -      | -      |
| 150            | -                                   | -     | -      | -     | -     | -     | 465   | 750   | 809    | 820    | 827    | 827    | -      |
| 200            | -                                   | -     | -      | -     | -     | -     | -     | 807   | 1190   | 1365   | 1450   | 1470   | -      |
| 250            | -                                   | -     | -      | -     | -     | -     | -     | -     | 1330   | 1770   | 2140   | 2195   | -      |
| 300            | -                                   | -     | -      | -     | -     | -     | -     | -     | -      | 1910   | 2830   | 2890   | -      |
| 350            | -                                   | -     | -      | -     | -     | -     | -     | -     | -      | -      | 3240   | 3295   | 4045   |
| 400            | -                                   | -     | -      | -     | -     | -     | -     | -     | -      | -      | -      | 3410   | 4740   |
| 500            | -                                   | -     | -      | -     | -     | -     | -     | -     | -      | -      | -      | -      | 5430   |

Specifications subject to change without notice



SAMSON AG · MESS- UND REGELTECHNIK  
Weismüllerstraße 3 · 60314 Frankfurt am Main · Germany  
Phone: +49 69 4009-0 · Fax: +49 69 4009-1507  
Internet: <http://www.samson.de>

**T 8000-3 EN**

2013-11-07